



AS-07 MXF Archive and Preservation Format

Type: Application Specification (AS)

Project leaders: Kate Murray (LC)

Maturity level: Proposed Specification

Date published: 27 June 2016

Location: <https://www.amwa.tv/projects/AS-07.shtml>

Comment: None

Document Status

This document is an AMWA Proposed Specification, and the project leaders request discussion and suggestions for improvements. Send comments to Kate Murray at the Library of Congress (kmur@loc.gov).

Abstract

The AS-07 Application Specification specifies a vendor-neutral subset of the MXF file format for the long-term archiving and preservation of moving image and other audiovisual content, including all forms of Ancillary Data, together with Associated Materials. Among other features, AS-07 defines a means for the carriage and labeling of multiple timecodes; the handling of captions, subtitles, and Timed Text; a minimal core metadata set; program segmentation metadata; and embedded content integrity data.

The overall application specification has been written broadly, to cover a wide range of audiovisual content. One derivative or secondary related version (referred to by the former AMWA term *shim*) is included via a set of constraints specified in appendix J. This derivative version is named the *AS-07 Baseband Shim: Single Items from Baseband Video*, and it is intended to serve the most critical current needs of many archives: the reformatting of older analog and digital videotapes and, for some organizations, the encoding and packaging of "live" video streams sent to an archive via a serial interface. Additional derivative or secondary related versions have been identified for future development including *born digital* (retain and rewrap essence as acquired), *scanned film* and other content types with RGB- and XYZ-based picture essences, and *audio-only*. Interest has also been expressed in some additional content types, including telemetry data, HDR imagery, and multi- and hyper-spectral imagery.

The AS-07 development project is led by the Library of Congress and other members of the Federal Agencies Digitization Guidelines Initiative (FADGI). At various times, the project team included representatives of the Library, the US National Archives, EVS, Audiovisual Preservation Solutions, the CBC, George Blood Audio/Video, and Metaglobe. The core user group for AS-07 will be archives that maintain audiovisual content for the long term.

Document History

This document began as the *Application Specification for Archiving and Preservation* (ASAP) under FADGI auspices. The AS-07 designation was assigned in 2012 when the specification came under AMWA auspices. Although AMWA had not yet established its Work in Progress (WIP) category, versions of AS-07 have been shared in a WIP manner with the archiving community five times:

- October 2010 (FADGI): MXF Application Specification for Archiving and Preservation, version 1d
 - http://www.digitizationguidelines.gov/guidelines/FADGI_MXF_ASAP_Arch_Pres_1d_cf_20101020.pdf
- August 2011 (FADGI): MXF Application Specification for Archiving and Preservation, version 1h
 - http://www.digitizationguidelines.gov/guidelines/FADGI_MXF_ASAP_Arch_Pres_1h_20110815.pdf
- October 2012 (FADGI): MXF Application Specification for Archiving and Preservation, version 1k
 - http://www.digitizationguidelines.gov/audio-visual/documents/FADGI_MXF_ASAP_1k_2012_10_05.pdf
- September 2014 (AMWA): AS-07 MXF Archive and Preservation Format (draft 9/2014)
 - http://www.amwa.tv/downloads/as-07/AS-07_reviewDraft_20140923.pdf
- September 2015 (AMWA): AS-07 MXF Archive and Preservation Format (draft 9/2015)
 - http://www.amwa.tv/downloads/as-07/AS-07_reviewDraft_20150904.pdf

Legacy Elements in AS-07

The AS-07 Application Specification project saw its AMWA launch and development (2012-2015) under the process rules in effect at that time. The specification as presented here was completed in 2016 under a new set of AMWA process rules. This history accounts for the fact that this document retains the AS-07 identifier and includes information about the derivative version called the *Baseband Shim*. Some of the SMPTE ULs and other tagging elements established during 2014 and 2015 use "AS07" and "AS-07" in tag strings.

Contents

Document Status	1
Abstract	1
Document History	2
Legacy Elements in AS-07	2
Contents	3
1 Scope	8
2 Conformance Language	8
3 Reference Documents	9
4 Acronyms and Terms	10
5 Overview (informative)	16
5.1 Summary of File Format Requirements	16
5.1.1 General	16
5.1.2 Metadata	16
5.2 AS-07 General Specifications and Shim Specifications	17
5.3 Use-cases for Shims	17
5.4 Derivation of Shims	17
5.5 Combinations of Shims	18
6 Parameters and Constraints	18
6.1 Shim parameters and constraints	18
6.1.1 Shim parameters and constraints (informative)	18
6.1.2 Shim parameter constraint strengths and related terms	18
6.1.3 Shim parameter constraint strengths and conformance testing (informative)	18
6.2 Essence Track Parameters and Constraints	19
6.2.1 General (informative)	19
6.2.2 Interleaving, Frame-, and Clip-wrapping	19
6.2.2.1 Interleaving	19
6.2.2.1.1 Interleaving (informative)	19
6.2.2.1.2 Interleaving requirements	19
6.2.2.2 Frame-, and Clip-wrapping	19
6.2.2.2.1 Frame-, and Clip-wrapping (informative)	19
6.2.2.2.2 Frame-, and Clip-wrapping requirements	20
6.2.3 Essence Partitions	20
6.2.3.1 Essence Partitions (informative)	20
6.2.3.2 Essence Partition Requirements	20
6.2.3.3 Shim Parameter Table for Essence Partitions	20
6.2.4 Generic Stream Partitions	20
6.2.4.1 Generic Stream Partitions and Embedding Data (informative)	20
6.2.4.1.1 AS-07 Essence Binary Data Objects (informative)	21
6.2.4.1.2 AS-07 Non-Essence Binary Data Objects (informative)	21
6.2.4.1.3 AS-07 Essence Textual Data (informative)	21
6.2.4.1.4 AS-07 Non-Essence Textual Data (informative)	22
6.2.4.1.5 Descriptive Information About Entities Carried in Generic Stream Partitions (informative)	22
6.2.4.2 Generic Stream Partition Encoder Requirements	22
6.2.4.3 Generic Stream Partition Decoder Requirements	23
6.2.5 Index Tables	23
6.2.5.1 Index Tables (informative)	23
6.2.5.2 Index Tables	23
6.2.5.3 Shim Parameter Table for Index Tables	24
6.2.6 Generic Container	24
6.2.6.1 Generic container mapping for JPEG 2000 codestreams (informative)	24

6.2.7	System Item.....	24
6.2.8	Random Index Pack.....	25
6.2.9	KAG Size	25
6.2.10	Picture Essence Encoding	25
6.2.10.1	Picture Essences	25
6.2.10.1.1	Broad Range of Picture Essences Possible (informative)	25
6.2.10.1.2	MXF Picture Essence Descriptors and Subdescriptors in AS-07 (informative)	25
6.2.10.1.3	Picture Essences general requirement	26
6.2.10.2	Picture Essence – JPEG 2000 Compressed (Lossless or Lossy)	26
6.2.10.2.1	JPEG 2000 Essences and SMPTE ST 422 (informative)	26
6.2.10.2.2	JPEG 2000 Essences and SMPTE ST 422	27
6.2.10.2.3	JPEG 2000 decoder requirement.....	27
6.2.10.2.4	Shim Parameter Table for Picture Essence – JPEG 2000 Compressed ...	27
6.2.10.2.5	Shim Parameter Table for Picture Essence – JPEG 2000 Compressed (informative)	28
6.2.10.3	Picture Essence – Uncompressed	28
6.2.10.3.1	Uncompressed picture essences (informative)	28
6.2.10.3.2	Uncompressed picture essences	29
6.2.10.3.3	Uncompressed essence decoder requirement	29
6.2.10.3.4	Shim Parameter Table for Picture Essence – Uncompressed	29
6.2.10.3.5	Shim Parameter Table for Picture Essence – Uncompressed (informative)	30
6.2.10.4	Picture Essence – Retain Source Encoding as Acquired (informative)	30
6.2.10.4.1	Retain source encoding (informative)	30
6.2.10.4.2	Retain Source Encoding Essences and MXF GC Mapping.....	30
6.2.10.4.3	Retained source encoding decoder requirement.....	31
6.2.10.4.4	Retain Source Encoding Essences and MXF GC Mapping (informative)	31
6.2.10.4.5	Shim Parameter Table for Picture Essence – Retain Source Encoding as Acquired	31
6.2.11	Audio Essence Encoding	32
6.2.11.1	MXF options for carriage of waveform audio (informative)	32
6.2.11.2	Multiple Audio Encodings and Wrappings Permitted (non-D-10 Essences)	32
6.2.11.3	Audio Encoding for D-10 Essences	32
6.2.11.4	Language repertoire and tagging (informative)	32
6.2.11.5	Language repertoire and tagging	32
6.2.11.6	Shim Parameter Table for Audio Essences	33
6.2.11.7	Audio Track Layout	33
6.2.11.7.1	Audio Track Layout (informative).....	33
6.2.11.7.2	Audio Track Layout Identification in AS_07_Core_DMS.....	34
6.2.11.7.3	Audio Track Layout Comments in AS_07_Core_DMS	34
6.2.11.7.4	Audio Track Layout Descriptors and Subdescriptors for SMPTE MCA	34
6.2.11.7.5	Audio Track Layout Decoder Requirements	34
6.2.11.8	Other Provisions.....	34
6.2.11.8.1	DialNorm Metadata	34
6.2.11.8.2	NICAM Audio (informative).....	34
6.2.12	Captions, Subtitles, and Timed Text	35
6.2.12.1	Terminology: Captions, Subtitles, and Timed Text (informative).....	35
6.2.12.2	Preservation and Archiving Goals for Caption, Subtitle, Timed Text, and Teletext Data (informative)	35
6.2.12.3	CEA-608 and CEA-708 (informative)	35
6.2.12.4	Teletext (informative).....	36
6.2.12.5	AS-07 Encoder Requirements for CEA-608, CEA-708, and Teletext	36
6.2.12.5.1	CEA-608 and CEA-708 Data Carriage	36

6.2.12.5.2	Translation of CEA-608, and -708 to SMPTE Timed Text	36
6.2.12.6	SMPTE Timed Text.....	36
6.2.12.6.1	Carriage of SMPTE Timed Text (informative)	36
6.2.12.6.2	AS-07 Encoder Requirements for SMPTE Timed Text	37
6.2.12.7	EBU STL and EBU Timed Text.....	37
6.2.12.7.1	EBU STL and EBU Timed Text (informative)	37
6.2.12.7.2	AS-07 Encoder Requirements for EBU STL.....	37
6.2.12.7.3	AS-07 Encoder Requirements for EBU TT	38
6.2.12.8	Encoder Provision of Timed Text to External Applications	38
6.2.12.9	Shim Parameter Table for Captions, Subtitles, and Timed Text	38
6.2.12.10	AS-07 Decoder Requirements for Captions, Subtitles, and Timed Text	39
6.2.13	VBI and Other Ancillary Data (ANC)	39
6.2.13.1	VBI and ANC in AS-07 (informative)	39
6.2.13.2	AS-07 Encoder Requirements for VBI and ANC.....	39
6.2.13.2.1	ANC Packet Carriage of Ancillary Data	39
6.2.13.2.2	CEA-608 and CEA-708 Descriptors	39
6.2.13.2.3	Teletext Descriptors.....	39
6.2.13.3	Shim Parameter Table for VBI and ANC.....	39
6.2.13.4	AS-07 Decoder Requirements for VBI and ANC Data	40
6.2.14	Active Format Description (AFD) and Pan-Scan Information.....	40
6.2.14.1	Active Format Description (AFD)	40
6.2.14.2	Pan-Scan Information.....	40
6.2.14.3	Shim Parameter Table for AFD and Pan-Scan.....	40
6.3	Operational Pattern Parameters and Constraints.....	41
6.3.1	AS-07 Operational Patterns for Item, Segmented, and Collection Files (informative).....	41
6.3.2	Baseline Operational Patterns	41
6.3.3	Operational Patterns -- Item Files	41
6.3.4	Operational Patterns -- Collection Files	42
6.3.5	Operational Pattern Labeling	42
6.3.6	Shim Parameter Table for Operational Patterns	42
6.4	Timecode.....	42
6.4.1	Timecode Categories (informative)	42
6.4.2	Timecode Sources (informative)	43
6.4.3	Labeling Timecode in Header Metadata	43
6.4.3.1	Labeling Timecode in Header Metadata (informative)	43
6.4.3.2	Labeling Timecode in Header Metadata (requirements)	43
6.4.3.2.1	Timecode Header Label Descriptor	43
6.4.3.2.2	Timecode Header Label Subdescriptor	44
6.4.4	Master Timecode	45
6.4.4.1	Master Timecode (informative)	45
6.4.4.2	Master Timecode in Header Metadata Top Level Source Package	45
6.4.4.3	Master Timecode in Header Metadata Material Package.....	45
6.4.4.4	Master Timecode in Essence Container System Items.....	46
6.4.5	Historical Source Timecode.....	46
6.4.5.1	Historical Source Timecode (informative)	46
6.4.5.2	Encode Various Types of Historical Source Timecode.....	46
6.4.5.3	Historical Source Timecode in Essence Container System Items	46
6.4.5.4	Historical Source Timecode Tracks in Header Metadata for TLSP	47
6.4.5.5	Historical Source Timecodes in Essence Container Picture, Sound, and Data Items.....	47
6.4.5.6	Historical Source Timecode in Lower Level Source Packages	47
6.4.5.6.1	Historical Source Timecode in Lower Level Source Packages (informative)	47

6.4.5.6.2	Historical Source Timecode in Lower Level Source Packages, Requirement Options for Shims (informative).....	47
6.4.5.6.3	Historical Source Timecode in Lower Level Source Packages, Encoder Requirements.....	47
6.4.6	Shim Parameter Table for Timecode	48
6.4.7	Decoder Behavior with Regard to Timecode	48
6.4.7.1	Decoder Behavior with Regard to Master Timecode.....	48
6.4.7.2	Precedence of Timecode.....	48
6.4.7.3	Decoder Behavior with Regard to Historical Source Timecode	48
6.5	Header Metadata Parameters and Constraints	49
6.5.1	Header Metadata	49
6.5.2	Shim Parameter Table for Header Metadata	49
6.5.3	Top-Level Source Packages	49
6.5.3.1	Top-Level Source Package Quantity (informative)	49
6.5.3.2	Top-Level Source Packages.....	49
6.5.3.3	Shim parameter table for Top-Level Source Packages.....	49
6.5.4	Lower-Level Source Packages.....	50
6.5.4.1	Lower-Level Source Packages, Relevant New Standard (informative).....	50
6.5.5	MXF Tracks	50
6.5.6	Descriptors.....	50
6.5.7	Package Labeling	50
6.6	Descriptive Metadata Parameters and Constraints	50
6.6.1	AS-07 Descriptive Metadata (informative).....	50
6.6.1.1	AS-07 Core Descriptive Metadata Scheme (informative).....	50
6.6.1.1.1	AS-07 Core DMS Device Objects (informative)	51
6.6.1.2	AS-07 DMS Identifier Objects (informative).....	51
6.6.1.3	AS-07 Generic Stream Partition Superclass Descriptive Metadata Scheme (informative)	51
6.6.1.3.1	AS-07 Generic Stream Partition Binary Data Descriptive Metadata Framework (informative)	52
6.6.1.3.2	AS-07 Generic Stream Partition Text-based Data Descriptive Metadata Framework (informative)	52
6.6.1.4	AS-07 Segmentation Descriptive Metadata Scheme (informative)	52
6.6.1.4.1	AS-07 Segmentation Descriptive Metadata Scheme – Parts Object (informative)	52
6.6.2	AS-07 Descriptive Metadata Schemes Encoder Requirements	52
6.6.2.1	AS-07 Descriptive Metadata Track Encoder Requirements.....	53
6.6.2.2	AS-07 Descriptive Metadata Track Decoder Requirements	53
6.6.3	Shim Parameter Table for Descriptive Metadata Schemes.....	53
6.6.4	Redundant Metadata.....	54
6.6.5	KLV Fill.....	54
6.6.6	Static Descriptive Metadata Requirements	54
6.7	Other Parameters and Constraints	54
6.7.1	Manifest	54
6.7.1.1	Manifest (informative)	54
6.7.1.2	Manifest Structure.....	54
6.7.1.2.1	File identifier	54
6.7.1.2.2	Responsible Organization Name	55
6.7.1.2.3	Creation date element	55
6.7.1.2.4	Annotation text element (optional)	55
6.7.1.2.5	Part list element	55
6.7.1.3	Part Element.....	55
6.7.1.3.1	Part identifier	55
6.7.1.3.2	Data description element	56

6.7.1.3.3	MIME media type	56
6.7.1.3.4	Size element	56
6.7.1.3.5	Location element (optional).....	56
6.7.1.3.6	Part annotation text element (optional).....	56
6.7.1.4	Manifest Encoder Requirements	56
6.7.1.4.1	General Manifest Requirements	56
6.7.1.4.2	Detailed Manifest Requirements	56
6.7.1.5	Manifest Decoder Requirements.....	57
6.7.1.6	Manifest XML Schema.....	57
6.7.1.7	Shim Parameter Table for the Manifest.....	57
6.7.2	Content Integrity	57
6.7.2.1	Content Integrity Objective and Relevant Standards (informative).....	57
6.7.2.2	CRC-32C Values per KLV Essence Triplets	59
6.7.2.3	Content integrity Values Carried in Arrays in Essence Container System Items (informative)	59
6.7.2.4	Content Integrity Array in Essence Container System Items	60
6.7.2.5	Encryption data (informative).....	60
6.7.2.6	Cryptographic Context Set, Cryptographic Framework, and Cryptographic Framework DM Tracks.	60
6.7.2.7	Retention of Encrypted Triplet Variable Length Pack Data	60
6.7.2.8	Decoder Requirements	61
6.7.2.9	Shim Parameter Table for Content Integrity	61
6.7.3	File Names	61
6.7.3.1	File Names.....	61
6.7.3.2	Shim Parameter Table for File Names	61
6.7.4	Directory Structure (informative)	61
6.7.5	Program Segmentation.....	62
6.7.5.1	Program Segmentation (informative).....	62
6.7.5.2	Program Segmentation Requirements.....	62
6.7.5.2.1	Segmentation Track.....	62
6.7.5.2.2	Single/Soft/Hard-Parted Programs (informative)	62
6.7.5.3	DM_AS_07_Segmentation_Framework (informative)	63
6.7.5.4	Shim Parameter Table for Program Segmentation	65
7	Test Material (forthcoming)	66
8	Appendix A. Recap: AS-07 Shim Parameters and Constraints (informative)	67
9	Appendix B. AS-07 Audio Layout Configurations, Identifiers, and Expected Values	77
10	Appendix C. Timecode Descriptors and Subdescriptors	81
11	Appendix D. Data Dictionary for AS-07 Core Descriptive Metadata Scheme and DMS Device Objects.....	89
12	Appendix E. Data Dictionary for AS-07 DMS Identifier Objects.....	92
13	Appendix F. Data Dictionaries for AS-07 Generic Stream Partition DMS, Binary Data DMS, and Text-based Data DMS.....	93
14	Appendix G. Data Dictionaries for Segmentation DMS and Parts Objects.....	96
15	Appendix H. AS-07 Manifest XML Schema	97
16	Appendix I. Cryptographic Structures	99
17	Appendix J. AS-07 Baseband Shim: Single Items from Baseband Video.....	101

1 Scope

This document describes a vendor-neutral subset of the MXF file format to use for the long-term archiving and preservation of moving image and other audiovisual content, including all forms of Ancillary Data, together with Associated Materials. Among other features, AS-07 defines a means for the carriage and labeling of multiple timecodes; the handling of captions, subtitles, and Timed Text; a minimal core metadata set; program segmentation metadata; and embedded content integrity data.

AS-07 files may contain a single item, or an entire series of items.

AS-07 files are not intended for direct online access; however they may include renditions intended for viewing without further processing.

AS-07 files are intended to be used in combination with external finding aids or catalog records. The external finding aids are used for day to day access to the archive collection. At the same time, AS-07 files must stand alone, so they would retain their value even if they were the only extant copy of an item.

Derivative versions of AS-07 will be developed over time. Prior to 2016, AMWA referred to these as *shims*, and that term is used in this document, reflecting the fact that it was drafted in 2014-15. In this version, the *Baseband Shim* specified in appendix J is an important element. This derivative version is intended to serve the most critical current use case for memory institutions: the reformatting of existing and obsolescent videotapes in their collections. The Baseband Shim is also intended to serve memory institutions (and others) who may be acquiring digital video ingested via serial interfaces, e.g., congressional high definition video transferred to the Library of Congress via HD-SDI or its equivalent. In both of these use cases, memory institutions wish to archive the highest possible quality of image and sound (uncompressed or losslessly compressed), as well as retaining source data such as multiple timecodes, captions and subtitles, and also embed metadata that will support authentication and management of the content for the long term.

2 Conformance Language

Normative text is text that describes elements of the design that are indispensable or contains the conformance language keywords: "shall", "should", or "may". Informative text is text that is potentially helpful to the user, but not indispensable, and can be removed, changed, or added editorially without affecting interoperability. Informative text does not contain any conformance keywords.

All text in this document is, by default, normative, except: the Introduction, any section explicitly labeled as "Informative" or individual paragraphs that start with "Note:"

The keywords "shall" and "shall not" indicate requirements strictly to be followed in order to conform to the document and from which no deviation is permitted.

The keywords, "should" and "should not" indicate that, among several possibilities, one is recommended as particularly suitable, without mentioning or excluding others; or that a certain course of action is preferred but not necessarily required; or that (in the negative form) a certain possibility or course of action is deprecated but not prohibited.

The keywords "may" and "need not" indicate courses of action permissible within the limits of the document.

The keyword "reserved" indicates a provision that is not defined at this time, shall not be used, and may be defined in the future. The keyword "forbidden" indicates "reserved" and in addition indicates that the provision will never be defined in the future.

A conformant implementation according to this document is one that includes all mandatory provisions ("shall") and, if implemented, all recommended provisions ("should") as described. A conformant implementation need not implement optional provisions ("may") and need not implement them as described.

Unless otherwise specified, the order of precedence of the types of normative information in this document shall be as follows: Normative prose shall be the authoritative definition; Tables shall be next; followed by formal languages; then figures; and then any other language forms.

3 Reference Documents

The following standards contain provisions which, through reference in this text, constitute provisions of this recommended practice. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this recommended practice are encouraged to investigate the possibility of applying the most recent edition of the standards indicated below.

AMWA AS-02	MXF Versioning
AMWA AS-03	MXF Program Delivery
AMWA AS-04	Language Tagging
AMWA AS-xx	Content Integrity [forthcoming]
AMWA AS-11	MXF Contribution Format
EBU R 48	Allocation of audio tracks on digital television recorders
EBU R 123	Audio Track Allocation for File Exchange
EBU R 122	Material Exchange Format Timecode Implementation
EBU 3264	Subtitling data exchange format
EBU 3285	Specification of the Broadcast Wave Format (BWF) - Version 2 - (2011)
EBU 3299	High Definition (HD) Image Formats for Television Production
SMPTE EG 42:2004	Material Exchange Format (MXF) — MXF Descriptive Metadata
SMPTE RP 224	SMPTE Universal Labels Register
SMPTE RP 2008:2011	Material Exchange Format — Mapping AVC Streams into the MXF Generic Container
SMPTE RP 2027:2011	AVC Intra-Frame Coding Specification for SSM Card Applications
SMPTE RP 2057:2011	Text-Based Metadata Carriage in MXF
SMPTE 12-1:2014	Time and Control Code
SMPTE 12-2:2014	Transmission of Time Code in the Ancillary Data Space
SMPTE ST 298:2008	Universal Labels for Unique Identification of Digital Data
SMPTE ST 330:2004	Unique Material Identifier (UMID)
SMPTE ST 331:2011	Element and Metadata Definitions for the SDTI-CP
SMPTE ST 334-1:2007	Vertical Ancillary Data Mapping of Caption Data and Other Related Data
SMPTE ST 334-2:2007	Caption Distribution Packet (CDP) Definition
SMPTE ST 337:2008	Format for Non-PCM Audio and Data in an AES3 Serial Digital Audio Interface
SMPTE ST 336:2007	Data Encoding Protocol Using Key-Length-Value
SMPTE ST 338:2010	Format for Non-PCM Audio and Data in AES3 — Data Types
SMPTE ST 339:2008	Format for Non-PCM Audio and Data in AES3 — Generic Data Types
SMPTE ST 340:2008	Format for Non-PCM Audio and Data in AES3 — ATSC A/52B Digital Audio Compression Standard for AC-3 and Enhanced AC-3 Data Types
SMPTE ST 356:2001	Type D-10 Stream Specifications — MPEG-2 4:2:2P @ ML for 525/60 and 625/50
SMPTE ST 365:2001	12.65-mm Type D-10 Format for MPEG-2 Compressed Video — 525/60 and 625/50
SMPTE ST 377-1:2011	Material Exchange Format (MXF) — File Format Specification
SMPTE ST 377-4:2012	MXF Multichannel Audio Labeling Framework
SMPTE ST 378:2004	MXF Operational pattern 1A (Single Item, Single Package)
SMPTE ST 379-1:2010	MXF Generic Container
SMPTE ST 379-2:2010	MXF Constrained Generic Container
SMPTE ST 381-1:2005	Mapping MPEG Streams into the MXF Generic Container
SMPTE ST 382:2007	Mapping AES3 and Broadcast Wave Audio into the MXF Generic Container
SMPTE ST 384:2005	Mapping of Uncompressed Pictures into the MXF Generic Container
SMPTE ST 385:2004	Material Exchange Format (MXF) Mapping SDTI-CP Essence and Metadata into the MXF Generic Container
SMPTE ST 386:2004	Mapping Type D-10 Essence Data to the MXF Generic Container
SMPTE ST 391:2004	MXF Operational Pattern 1b (Single Item, Ganged Packages)
SMPTE ST 392:2004	MXF Operational Pattern OP2a

AS-07: MXF Archive and Preservation Format

SMPTE ST 405:2006	Material Exchange Format (MXF) Elements and Individual Data Items for the MXF Generic Container System Scheme 1
SMPTE ST 408:2006	MXF Operational Patterns 1c, 2c, and 3c
SMPTE ST 410:2008	MXF Generic Stream Partition
SMPTE ST 422:2014	Mapping of JPEG 2000 Codestreams into the MXF Generic Container
SMPTE ST 429-5:2009	D-Cinema Packaging — Timed Text Track File
SMPTE ST 429-6:2006	D-Cinema Packaging – MXF Track File Essence Encryption
SMPTE ST 436:2006	MXF Mappings for VBI Lines and Ancillary Data Packets
SMPTE ST 2016-1:2009	Format for Active Format Description and Bar Data
SMPTE ST 2016-2:2007	Format for Pan-Scan Information
SMPTE ST 2016-3:2007	Vertical Ancillary Data Mapping of Active Format Description and Bar Data
SMPTE ST 2016-4:2007	Vertical Ancillary Data Mapping of Pan-Scan Information
SMPTE ST 2035:2009	Audio Channel Assignments for Digital Television Recorders (DTRs)
SMPTE ST 2075:2013	Mapping EBU TECH 3264 (STL) into the MXF Generic Stream Container
CEA 608E	Closed Captioning Data on line 21
CEA 708E	DTV Closed Captioning
ISO 13818 (several parts)	MPEG-2
ISO 15444-1:2004	JPEG 2000 Core Coding
ISO/IEC 15444-1:2004/Amd 3:2010	JPEG 2000 Core Coding Broadcast Profiles
ITU H.264	Advanced Video Coding (a.k.a. ISO 14496-10 MPEG-4 part 10)
IETF RFC 5646 (2009)	Tags for Identifying Languages
IETF RFC 6838 (2013)	Media Type Specifications and Registration Procedures
SCTE 35	Splice Point Markers

4 Acronyms and Terms

Acronym or Term	Description
AES3	Professional digital audio transport standard (Audio Engineering Society 3).
AFD	Active Format Description. See SMPTE ST 2016-1:2009.
ANC	Ancillary Data, essence data other than Video or Audio that may be embedded in a bit stream that carries Video and Audio and may be contained in the AS-07 file. <i>See also HANC and VANC.</i>
Ancillary Data	<i>See ANC.</i>
Associated Materials	Binary non-essence digital representations of materials closely associated with the file's essences, e.g., scanned images and documents, video trailers, scripts, etc. These are items that are unrelated to the timeline or that are unevenly distributed along the timeline and that will be stored in Generic Stream Partitions (SMPTE ST 410-2008).
Ancillary Resource (Timed Text)	An integral unit of data in a Timed Text resource such as a font, sub-picture image or an XML document (SMPTE ST 429-5)
Audio	Essence data of any type contained in the AS-07 file that contains audio data.
Audio Item	Component of the MXF Content Package that stores the package-level sound data, e.g., the data for one frame of audio when essences are frame-wrapped. There is only a single Audio Item per content package; each Audio Item is comprised of one or more Audio Elements. <i>See also Content Package, Data Item, Generic Container, Picture Item, and System Item.</i>
Audio Services	Audio tracks that include elements other than the soundtrack for picture. Examples include Descriptive Video Services (DVS), Secondary Audio Program

	(SAP), annotations (like a director's commentary for a dramatic program), as well as other types of multiple language content or other versioning elements. Sound tracks on certain videotape formats may also carry timecode data, e.g., the carriage of LTC on track three of the 1-inch type C format. <i>See also Descriptive Video Services (DVS) and Secondary Audio Program (SAP).</i>
Audio Track	A type of Essence Track that references Sound Essence. Synonymous with Sound Track.
AVC-Intra	A video compression standard that is compliant with H.264 but uses intraframe only coding. Described by ITU-T Rec H.264.
Clip-wrapping	Essence carriage in which a single Content Package contains all of the essence data for the file. Each individual essence (video, audio, timecode, etc.) is presented in its entirety, followed by the next essence type. Does not support efficient playout since picture, audio, and other essence data are stored separately and a decoder must wait for all of the video to be delivered before beginning to receive audio and other elements. <i>See also Frame-wrapping and Content Package.</i>
Closed Caption	Text transcription or description of the audio/video data. In this specification, synonymous with subtitling.
Collection Files (AS-07)	AS-07 Collection Files contain essences that are organized as Operational Pattern OP3c. AS-07 Collection Files have multiple Material Packages and permit external references, the targets of which must be AS-07 Item Files. Content example: multiple episodes or instances in a series for which an organization wishes to archive an MXF file that "virtually binds" the collection. <i>See also Item Files (AS-07) and Segmentation.</i>
Content Integrity Data	Data that supports monitoring of the condition of stored data or files, typically by means of comparisons of past and present fixity information, i.e., hash values or checksums. Sometimes called <i>Message Integrity Code (MIC)</i> or <i>Media Integrity Check (MIC)</i> data. In a file format specification, the focus is on content integrity data embedded in the file. <i>See also Content Integrity Data, Cryptographic Context Set, Cryptographic Framework, Encrypted Triplet Variable Length Pack, and MIC.</i>
Content Package	The main component of MXF's essence-carrying Generic Container. Each Content Package carries a portion of the overall essence payload, and the packages are sequentially stored in the Generic Container until all of the essence has been stored. Content Packages are divided into essence items, each of which represents one type of material in the package: picture, audio, or other data, including compound essence items. <i>See also Audio Item, Content Package, Data Item, Generic Container, Picture Item, and System Item.</i>
Cryptographic Context Set	Similar to MXF Descriptive Metadata Schemes (DMS), Cryptographic Context Sets are part of the digital cinema security structure and are standardized in SMPTE ST 429-6:2006. Cryptographic Context Sets are included in AS-07 to support consistency with ST 429-6 in terms of Content Integrity practices. <i>See also Content Integrity Data, Cryptographic Framework, and Encrypted Triplet Variable Length Pack.</i>
Cryptographic Framework	Similar to MXF Descriptive Metadata (DM) Frameworks, Cryptographic Frameworks are part of the digital cinema security structure and are standardized in SMPTE ST 429-6:2006. Cryptographic Frameworks are included in AS-07 to support consistency with ST 429-6 in terms of Content Integrity practices. <i>See also Content Integrity Data, Cryptographic Context Set, Encrypted Triplet Variable Length Pack, and MIC.</i>
Cryptographic Framework DM Tracks	<i>See Cryptographic Framework.</i>

Data Item	Component of the MXF Content Package that stores continuous package-level data that is neither picture nor audio, e.g., Ancillary Data such as subtitles and other VBI data. There is only a single Data Item per content package; each Data Item is comprised of one or more Data Elements. <i>See also Ancillary Data, Audio Item, Content Package, Generic Container, Picture Item, and System Item.</i>
Descriptive Metadata	Generic term used for descriptive data stored in MXF files whose purpose is to describe Essence data.
Descriptive Metadata Track	An MXF Track that contains Descriptive Metadata.
Descriptive Video Services (DVS)	Additional narration track intended primarily for blind and visually impaired consumers of visual media, also called audio description, video description, or visual description. DVS consists of a narrator describing what is happening on the screen during pauses in the audio and/or during dialog if necessary. <i>See also Audio Services</i>
Descriptors	A family of metadata entities defined in the SMPTE standards that govern the MXF format. SMPTE standard ST 377-1:2011 defines an abstract generic descriptor superclass as well as a number of specific subclass instances, including descriptors for picture essences, audio essences, and data essences, each of which carries important parametric information about the essences. Another important example, related to timecode, is the Date/Time Descriptor specified in SMPTE ST 385:2012. <i>See also Subdescriptors.</i>
Digital Provenance Metadata	<i>See Process Metadata and Sampling Metadata.</i>
DAM	Digital Asset Management, often a system.
DM	<i>See Descriptive Metadata.</i>
DM Framework	A Descriptive Metadata Class that is a Subclass of Descriptive Framework. <i>See SMPTE ST 377-1:2011.</i>
DM Scheme	A mechanism for defining collections of Descriptive Metadata
DM Scheme Label	An identifier for a DM Scheme. It is stored in an MXF file's Preface::DMSchemes property to signify the use of that DM Scheme in the file. <i>See SMPTE EG 42:2004.</i>
DM Segment	An MXF structure used to generically contain Descriptive Metadata on a Track. <i>See SMPTE ST 377-1:2011.</i>
DMS Segmentation	Descriptive Metadata Scheme for Segmentation. <i>See Segmentation.</i>
Dolby E	Professional audio encoding standard developed by Dolby Laboratories.
D-10	A video compression standard that is compliant with MPEG2 but uses intraframe only coding.
Edit Unit	Generally used to name the smallest portion of an essence stream that can be edited, e.g., a field or frame of a picture, or an audio sample. In the glossary for the SMPTE ST 377-1:2011, the preceding definition is linked to the term <i>Editable Unit</i> , with Edit Unit defined in temporal terms and related to Edit Rate. Customary usage, however, associates <i>Edit Unit</i> with entities like video frames.
EBU STL	EBU R 3264 subtitling specification. <i>See also closed caption.</i>
Encrypted Triplet Variable Length Pack	Part of the digital cinema security structure standardized in SMPTE ST 429-6:2006, the Encrypted Triplet Variable Length Pack carries MIC hash values and encryption data. <i>See also Cryptographic Context Set, Cryptographic Framework, Content Integrity Data, and MIC.</i>
Essence	The bitstreams that contain video, audio, or ancillary data, the presence of which will influence the designation of the file's Operational Pattern, meaning that the elements categorized as essence will be part of the content playout expressed in the file's Material Package. In non-MXF contexts, the term essence may carry different meanings.

Essence Partition	An MXF file Partition that is dedicated to storing Essence data.
Essence Element	An Essence stream within an Essence Container.
Essence Track	A type of Track that references Essence.
Filler	An MXF structure used to describe empty space on a Timeline Track. See SMPTE ST 377-1:2011.
Frame-wrapping	Essence carriage in which each Content Package contains all of the data for a single frame of the file. Permits efficient playout since picture, audio, and other time-based elements are available simultaneously. <i>See also Clip-wrapping and Content Package.</i>
Generic Container	MXF data structure used to store Essence data in an MXF file as specified in SMPTE ST 379-2:2010. The Generic Container is a contiguous sequence of Content Packages. <i>See Content Package.</i>
Generic Stream Partition	Partition that can be used to carry text-based data (e.g., Timed Text) or binary data, specified in SMPTE ST 410:2008.
Graphic/image	An example of a graphic/image is scanned image of the video container box cover in formats such as TIFF or JPEG. Within AS-07, it is a controlled vocabulary term to identify the data description role of non-essence binary data in a Generic Stream Partition.
Hard-Parted Program	A type of Segmentation. Breaks between segments are required. <i>See also Segmentation, Single-Part Program, and Soft-Parted Program.</i>
HANC	Horizontal Ancillary Data; ancillary data stored in non-picture portions of horizontal scan lines.
Header Metadata	MXF data structures that collectively describe the data in the Essence data in an MXF file. See SMPTE ST 377-1:2011.
Header Partition	The MXF file Partition that contains the Header Metadata.
Historical Source Timecode (AS-07)	AS-07 Historical Source Timecode is legacy timecode from source items, e.g., a videotape being reformatted, including but not limited to LTC, VITC and ATC. The term is taken from EBU R 122. AS-07 Historical Source Timecode may be discontinuous and shall not be used as the AS-07 Master Timecode.
Horizontal Ancillary Data	<i>See HANC</i>
Index Partition	An MXF file Partition that is dedicated to storing an Index Table.
Index Table	A structure in an MXF file used to efficiently access Essence data. See SMPTE ST 377-1:2011.
Intimate Metadata	Metadata that contains information to be synchronized with the essence, e.g., for analysis or at playout time. For example, some <i>process metadata (q.v.)</i> about the source stream uses timecode to document the time-location of certain readings or events that occurred when the stream was reformatted or analyzed.
Item Files (AS-07)	AS-07 Item Files contain internal essences organized as Operational Patterns 1a or 1b, featuring a single Material Package. Essences may be represented as segments using AS_07_Segmentation_DMS. <i>See also Collection Files (AS-07) and Segmentation.</i>
KLV Alignment Grid	A notional byte spacing which may be used to align KLV items within a Partition. See SMPTE ST 377-1:2011.
KLV Fill	Refers to the well-defined means of inserting empty, “fill”, data in an MXF file. See SMPTE ST 377-1:2011.
KLV Triplet	Triple units of data encoded using the KLV (Key-Length-Value) structure specified in SMPTE ST 336:2007. <i>Key</i> identifies the data via a code, <i>Length</i> specifies the data's length, and <i>Value</i> is the data itself.
Logging Metadata	<i>See Process Metadata.</i>
Manifest	XML data structure that provides an overview of the files parts and content together with other data such as optional content integrity checksums.

Master Timecode (AS-07)	AS-07 Master Timecode is represented using MXF Structural Metadata, specifically using a Timecode Track; the canonical and continuous representation of timecode, providing references into the essence for all timecode-dependent activities. Sometimes referred to as synthetic timecode.
Material Package	An MXF data structure that contains Tracks and identifiers that describe the file's content. See SMPTE ST 377-1:2011.
Metadata	Data about data. See <i>Descriptive Metadata</i> , <i>Descriptive Metadata Track</i> , <i>Metadata Scheme Definition</i> , <i>Process Metadata</i> , and <i>Supplementary Metadata</i> .
MIC	Variously glossed as Message Integrity Code (digital cinema, SMPTE ST 428-6:2006) and Media Integrity Check (AMWA MXF application specification AS-02), this refers to a fixity or hash value used to monitor the condition of stored data. See also <i>Content Integrity Data</i> .
MPEG-2	ISO/IEC 13818 video compression
Operational Patterns OP1a, OP1b, and OP3c.	Constrained applications of MXF, pertaining to the number and relationship between essence elements, as specified in SMPTE ST 378:2004, SMPTE ST 391:2004, and SMPTE ST 408:2006.
Package	See <i>Source Package</i> and <i>Material Package</i> .
Partition	A division that exists in MXF files to divide and separate Essence data, Generic Streams, Index Table data, or Header Metadata; specified in SMPTE ST 377-1:2011. See also <i>Generic Stream Partition</i> .
PCM	Pulse Code Modulation audio encoding.
Picture Item	Component of the MXF Content Package that stores the package-level picture data, e.g., the data for one frame of picture when essences are frame-wrapped. There is only a single Picture Item per content package; each Picture Item is comprised of one or more Picture Elements. See also <i>Audio Item</i> , <i>Content Package</i> , <i>Data Item</i> , <i>Generic Container</i> , and <i>System Item</i> .
Picture Essence	A type of Essence containing predominantly picture data.
Picture Essence Descriptor	MXF technical metadata that describes the Picture Essence. See Section F.4 of SMPTE ST 377-1:2011.
Picture Track	An MXF Track that references Video essence.
Process Metadata	Metadata that documents the general facts about the system, settings, facility, and operator when a video signal is transferred, e.g., in a reformatting (tape to file) activity. Often produced on a frame-by-frame or even sample-by-sample basis. Sometimes called <i>Sampling Metadata</i> . In the digital library community, this is part of <i>digital provenance metadata</i> . In AS-07, Process Metadata will often be a form of Supplementary Metadata, carried in a Generic Stream Partition.
Quality control/review data	An example of quality control/review data is process-logging metadata produced by the Front Porch SAMMA device. Within AS-07, it is a controlled vocabulary term to identify the data description role of non-essence data in a Generic Stream Partition.
Random Index Pack	A table that contains the byte offsets of all Partitions. See SMPTE ST 377-1:2011.
Related Document	Examples of related documents are scanned text of the video's script or shot list. Within AS-07, it is a controlled vocabulary term to identify the data description role of non-essence data in a Generic Stream Partition.
Sampling Metadata	See <i>Process Metadata</i> .
Secondary Audio Program (SAP)	Also called Separate Audio Program or Second Audio Program, SAP is an auxiliary audio channel that can be broadcast or transmitted both over-the-air and by cable television. SAP is part of the multichannel television sound (MTS) standard originally set by the National Television Systems Committee (NTSC) in 1984 in the United States, and it is often used to provide audio tracks in languages other than the main language of a given program. It may also carry

	Descriptive Video Service (DVS) in the U.S. <i>See also Audio Services, Descriptive Video Service.</i>
Segmentation	The description of regions in a program's Essence data that contain non-program content or points where the program content may be interrupted to insert non-program content at broadcast time. In AS-07, segmentation descriptions are incorporated in AS_07_Segmentation_DMS and related elements. <i>See also Hard-Parted Program, Single-Part Program, and Soft-Parted Program.</i>
Segmentation Track	An MXF Track that contains Segmentation metadata.
Shim	An application specific constraints set that constrains an Application Specification in order to tailor the general specification to a specific purpose.
Shim parameter tags	Entities developed by AMWA to support automation in the production or use of MXF files constrained by Application Specifications and their shims. These tags identify content elements beyond the level provided by SMPTE ST 377-1, Material Exchange Format (MXF) — File Format Specification. Tables listing provisional AS-07 values for <i>shim parameter tags</i> are provided in this specification and in the shims presented as appendixes.
SID	<i>See Stream Identifier.</i>
Single-Part Program	A type of Segmentation. <i>See also Hard-Parted Program, Segmentation, and Soft-Parted Program.</i>
SMPTE 12M Timecode	Traditional timecode as specified by SMPTE 12-1:2014.
Soft-Parted Program	A type of Segmentation. Segment breaks are not required. <i>See also Hard-Parted Program, Segmentation and Single-Part Program.</i>
Sound Essence	A type of Essence containing sound data.
Sound Essence Descriptor	MXF technical metadata that describes the Sound Essence. See Section F.5 of SMPTE ST 377-1:2011.
Sound Track	A type of Essence Track that references Sound Essence. Synonymous with Audio Track.
Source Essence	Essence data referenced by a Source Package.
Source Package	MXF data structure that describes source video, audio, or ancillary Essence data in an MXF file. See SMPTE ST 377-1:2011.
Source Timecode	Deprecated for AS-07. This term is used broadly in EBU R 122 to cover a range of timecode entities that include the ones named by the preferred AS-07 terms <i>Master Timecode</i> and <i>Historical Source Timecode</i> .
Static Track (DM)	A Track carrying unchanging Descriptive Metadata. See Annex B.27 of SMPTE ST 377-1:2011.
Stream Identifier	Unique identifier for a stream of bytes in an MXF file, abbreviated as SID.
Subdescriptors	One method to extend MXF Descriptors (a form of metadata). The subdescriptor superclass is defined in SMPTE ST 377-1:2011. In AS-07, for example, appendix C.3 builds on the superclass to define a subdescriptor for the timecode header label. <i>See also Descriptors.</i>
Supplementary Metadata	Metadata that supplements the metadata required by the MXF standards as specified in AS-07 (e.g., metadata in headers, DM Schemes, etc.). Supplementary Metadata may be represented by organization-specific descriptive ("cataloging") or administrative metadata, or by specialized forms of Process Metadata. In AS-07 files, Supplementary Metadata is carried in Generic Stream Partitions.
Synthetic Timecode	<i>See Master Timecode (AS-07).</i>
System Item	Component of the MXF Content Package that stores package-level metadata about the essence, e.g., frame-by-frame timecode values. There is only a single

	System Item per content package; each System Item is comprised of one or more System Elements. <i>See also Audio Item, Content Package, Data Item, Generic Container, and Picture Item.</i>
Timed Text	XML-based format for captions and subtitles derived from the W3C Timed Text standard, standardized by SMPTE and EBU and, in the U.S., required for Web dissemination by the Federal Communication Commission (FCC).
Timecode	An annotation of elapsed time along a Track. <i>See SMPTE ST 377-1:2011.</i>
Timecode Component	An MXF structure that stores timecode information, specified in SMPTE ST 377-1:2011.
Timecode Track	An MXF Track that stores one or more Timecode Components.
Timeline Track	A specialized MXF track that describes a timeline by specifying an origin and rate, specified in SMPTE ST 377-1:2011.
Top Level File Package	A Source Package that is internal to the file and which is directly referenced by a Material Package of the file. <i>See SMPTE ST 377-1:2011.</i>
Track::TrackNumber	A property in an MXF Timeline Track, specified in SMPTE ST 377-1:2011.
Track	MXF data structure used to describe the content structure, specified in SMPTE ST 377-1:2011.
Track::TrackName	The property that is the descriptive name of a Track, specified in SMPTE ST 377-1:2011.
Trailer/preview	A trailer/preview is an advertisement or a commercial for a program that will be exhibited in the future at a cinema. Within AS-07, it is a controlled vocabulary term to identify the data description role of non-essence data in a Generic Stream Partition.
Universal Label	Unique identifiers for metadata items, specified in SMPTE ST 298:2008.
VANC	Vertical Ancillary Data, non-video information (such as audio, other forms of essence, and metadata) embedded within non-picture portions of vertical scan lines of the serial digital interface. <i>See also ANC and HANC.</i>
VBI	Vertical Blanking Interval, the time between the end of the final line of a frame or field and the beginning of the first line of the next frame in a raster graphics display.
Vertical Ancillary Data	<i>See VANC.</i>
Vertical Blanking Interval	<i>See VBI.</i>

5 Overview (informative)

5.1 Summary of File Format Requirements

5.1.1 General

AS-07 files may contain a single item, a segmented series of items, or (via external reference) a collection of items. Detailed specifications are provided in sections 6.3 (Operational Pattern Parameters and Constraints), 6.7.5 (Program Segmentation), and elsewhere.

AS-07 files may include one or several renditions of the items. Different renditions may arise from different original sources of the item; different renditions may also be created from multiple encodings of the original source using different image compression or encoding schemes. AS-07 files are not intended for direct online access, however they may include renditions intended for viewing without further processing.

5.1.2 Metadata

AS-07 files may contain metadata in several locations: in the MXF header; in DM tracks; in the form of closed captioning, other forms of Timed Text, and/or other ancillary data; and as text-based data (called AS-07 Supplementary Metadata) in Generic Stream Partitions (see 6.2.4). Supplementary Metadata will employ structures from other authorities (e.g., for MARC library cataloging) or follow an archive's local requirements.

Such structures and requirement will be adopted or developed by archiving organizations and are not part of the AS-07 specification.

For many archiving organizations, the metadata embedded in AS-07 files will have a dynamic relationship to external metadata resources, e.g., databases associated with digital asset management (DAM) systems, external archival finding aids in machine-readable form, or library catalog records in a searchable cataloging system. Often, the metadata extracted from AS-07 files, e.g., at the time of ingestion, will populate elements or fields within the DAM databases, finding aids, or catalogs. Meanwhile, the external databases, finding aids, and catalogs support day-to-day access to items in the archived collection and may also provide additional or updated metadata elements to be inserted or appended in AS-07 files in the archival storage system.

At the same time, the AS-07 specification will permit files to stand alone, for the archives that choose to embed a full set of metadata in the file. For such implementations, AS-07 files will retain their full informational value even if they were the only extant copy of an item, and in against the catastrophic loss of an archive's other metadata resources.

The metadata in AS-07 files will often represent information as it existed at the time of ingest or subsequent refresh of the item, including a reference to the source of the metadata and an audit trail of modifications to the metadata. The metadata in the files will often include an identifier that links to the external metadata, which in some cases will be more current than the embedded metadata. In some circumstances, as noted in the preceding paragraph, the embedded metadata could be used to regenerate external databases, finding aids, or catalog records when needed. As with any database re-creation activity, there is a risk that versions will not remain in sync and the usual data-updating precautions should be taken.

5.2 AS-07 General Specifications and Shim Specifications

To maximize commonality across applications, this specification is divided into general provisions that apply to all applications and specific constraint sets (called "shims") that apply to defined applications.

General provisions apply to all AS-07 files and thus represent the maximum required capability of cache and playout servers and transcoder operations.

Each shim provides a further set of constraints that reduce the range of variability that may be needed in well-defined categories of applications. These categories may address particular types of sources (e.g., from baseband streams, from motion picture film, or the ingestion of born-digital media), or they may address requirements of particular archive collections and uses (which may, for instance, dictate specific encoding formats or specific metadata).

5.3 Use-cases for Shims

The purpose of a shim is to describe the content that may be present in a particular variant of AS-07 files. This knowledge has several practical applications in archival systems, for example:

- To guide encoding equipment as to how to convert and condition original sources as they are prepared for submission, or after time has passed, as they are migrated to new formats for dissemination or continued preservation
- To guide quality assurance equipment that is used to verify input submissions or, as time passes, to monitor file integrity or other aspects relevant to long-term content preservation
- To guide cataloguers (both archivists and automated scanners) as to what metadata to expect in examining an input submission, and to indicate which types of metadata to expect as embedded in the file

5.4 Derivation of Shims

Shims do not add new capability to the general provisions. They are constraints on the general provisions. Thus, the general provisions are intentionally non-restrictive in some areas.

Shims may express stronger constraints than the general specification by strengthening the conformance language, e.g. strengthening “should” to “shall.” Shims may also constrain parameter values to a set of permissible values that is a sub-set of those defined in the general specification. Shims may directly constrain the general provisions, or they may add further constraints to other less specialized shims. For ease of use, shims list the less-specialized shim from which they are derived. Shims can only add constraints to or remove choices from the shims from which they are derived; they cannot relax constraints or provide alternative parameters.

5.5 Combinations of Shims

In some cases an application needs to permit several different kinds of content, each with their own sets of constraints. Shims may express this by declaring an explicit choice between different, less-specialized shims.

6 Parameters and Constraints

6.1 Shim parameters and constraints

6.1.1 Shim parameters and constraints (informative)

MXF Application Specifications are statements of constraints. Each section or subsection not labeled as informative articulates a constraint. Formatting elements that are not stated or defined in this specification may be construed to be unconstrained, meaning that AS-07 encoders may employ all parts of those elements as permitted by SMPTE 377-1:2011, *Material Exchange Format (MXF) — File Format Specification*.

Shim parameter tags are entities developed by AMWA to support automation in the production or use of MXF files constrained by Application Specifications and their shims. These tags identify content elements beyond the level provided by SMPTE ST 377-1. The five-column tables in the main specification provide a set of permitted values that can be further constrained in a shim, and they also state the strength of the constraint. For a given shim, the tables are extended with two additional columns that articulate the strength of the constraint for the shim and state the values that may be employed in files that conform to that shim's specifications.

6.1.2 Shim parameter constraint strengths and related terms

Within the shim parameter tables, the strength of shim parameters is categorized as follows:

- Gentle - a range of values or choices that individual shims may further restrict. An example of a gentle constraint pertains to the selection of identifier type for the program in an AS-07 file.
- Moderate - a set of values or choices that individual shims should choose between. An example of a moderate constraint pertains to the tagging of languages in soundtracks and captions or subtitles.
- Strong - the strongest constraints, i.e., a firm requirement that the value (or one of the approved values) be employed. An example of a strong constraint is the requirement that Timed Text conform to the SMPTE ST 2075:2013 or EBU Tech 3350 standards.

Some parameters may define the allowed presence of content elements. This is expressed using narrative conformance terms (“shall”, “shall not”, “may”) and numerical parameters “minOccurs” and “maxOccurs” (as in XML Schema).

6.1.3 Shim parameter constraint strengths and conformance testing (informative)

The strength categories (gentle, moderate, strong) listed in 6.1.2 will be applied in different ways. Their main purpose is as stated in 6.1.2. For conformance testing, however, there will often be more stringent uses. The AS-07 Baseband Shim, defined in appendix J, provides a convenient example. (Other AS-07 shims are anticipated in the near future.) As the Baseband Shim was defined, the AS-07 team enumerated the shim's testable requirements as a guide for conformance testing. In this analysis (not part of this narrative version of the specification), every parameter is treated as mandatory in order to permit the easy development of automated tools to validate the conformance of AS-07 Baseband Shim files.

6.2 Essence Track Parameters and Constraints

6.2.1 General (informative)

AS-07 files shall contain moving image content ("video"), program audio (soundtrack), audio services (e.g., SAP, DVS), closed captioning, content integrity data and other ancillary data including binary data such as Associated Materials (still images, scripts, etc.), and text-based data such as XML-based Supplementary Metadata (other than DMS). The range of types of programs is specified in the sections pertaining to Operational Patterns (6.3) and Segmentation (6.7.5).

Incidentally, if a multi-program Transport Stream is received by an organization, the presumption is that each program in the Transport Stream will assume the role of primary essence in an MXF file. Organizations may choose to retain the original Transport Stream as an associated essence. The Manifest (6.7.1) will list everything in a given file.

6.2.2 Interleaving, Frame-, and Clip-wrapping

6.2.2.1 Interleaving

6.2.2.1.1 Interleaving (informative)

Many AS-07 essences (e.g., from a digitized videotape) will be interleaved. Interleaving normally implies frame-wrapping, and interleaving with clip-wrapping would only apply to imported essence like MPEG TS or DV DIF, so will be uncommon. See 6.2.2.2 for more information on frame- and clip-wrapping. Regarding DV DIF, this essence is usually represented in a different way: "compound items." See section 6.2.10.4 (Retain Source Encoding as Acquired) for discussion of wrapping born digital content like DV by importing but not transcoding.

6.2.2.1.2 Interleaving requirements

Essence in each Generic Container in AS-07 Files may be interleaved or non-interleaved frame-by-frame. AS-07 encoders shall interleave or non-interleave Essence in AS-07 Files in accordance with the specifications for each shim.

6.2.2.2 Frame-, and Clip-wrapping

6.2.2.2.1 Frame-, and Clip-wrapping (informative)

AS-07 echoes widespread current practices by requiring frame-wrapping, as is normally employed for interleaved essences. There may be exceptions which will be called out in a shim.

The AS-07 Baseband Shim, as its name implies, is intended to serve instances where the essence input to the encoder will be in a digital baseband format, or will have just been transcoded into baseband. Thus the Baseband Shim is limited to frame-wrapping.

Clip-wrapping in AS-07 files is generally associated with digital picture essences for which the coding is to be retained-as-acquired; see section 6.2.10.4. AS-07 files, however, have a general requirement that even those essences be frame-wrapped, as stated within section 6.2.10.4.2: "In order to accommodate AS-07 timecode (section 6.4), VBI, and ancillary data (6.2.12.2), and content integrity (6.7.2) elements, essence containers . . . must use frame-wrapping rather than clip-wrapping." For example, MPEG-2 Elementary Streams often arrive clip-wrapped in .mpg files. There is little difficulty in dividing such streams into access units amenable to frame-wrapping without loss of information, and there is great practical benefit in frame-wrapping and interleaving with VI, ANC, sound and other data.

There is an exception to this rule, however, that recognizes the difficulties associated with retain-as-acquired essences that are acquired already clip-wrapped and which it is impractical or counterproductive to frame-wrap. For example, MPEG-2 Transport Streams include complex internal relationships and sub-streams and it would be difficult or impossible to avoid data loss when dividing such streams into frame oriented access units. In addition, some archives that are adopting AS-07 possess certain classes of video content for which legal restraints prevent changing essences in any way.

The specifics for carrying out the exception outlined in the preceding paragraph will be drafted as a part of the forthcoming AS-07 shim for retain-as-acquired essences. Once written, that shim will specify a structure for an MXF file with frame-wrapped VI, ANC, sound, and data, with a clip-wrapped picture element in the same file.

Meanwhile, Teletext will be carried as Ancillary Data, as specified in section 6.2.12.5.

6.2.2.2.2 Frame-, and Clip-wrapping requirements

AS-07 encoders shall framewrap Essences in each Generic Container, unless an alternate wrapping is explicitly required by a shim.

AS-07 shims may offer specifications for the wrapping of specialized elements, e.g., NICAM audio. Such wrapping may be either frame- or clip-wrapped, and the shim definition shall include the KLV metadata keys that are part of the essence container syntax.

6.2.3 Essence Partitions

6.2.3.1 Essence Partitions (informative)

The handling of Essence in terms of Partitions and Generic Containers conforms to SMPTE ST 377-1, including section 6.2.1. Note that the use of the term *segmented* in ST 377-1 and in the AS-07 requirement that follows pertains to the segmentation of a single Essence. The structuring of an AS-07 file in which a single program is divided into *segments*, each of which is an Essence of its own, is covered in section 6.7.5, which owes a great debt to AS-11.

6.2.3.2 Essence Partition Requirements

AS-07 Essence Containers may be contained in a single Partition or may be segmented and distributed over two or more Partitions. If Essence Containers are partitioned, encoders shall start new Partitions at the following intervals in terms of program time: each approximately 10 seconds (plus/minus 1 second) interval or approximate 1 minute (plus/minus 5 seconds) interval. Constraints to single or multiple partitions may be required by a shim.

If partition structures are inherited from pre-existing MXF-wrapped video, encoders shall respect and retain those pre-existing partitions, provided that that the pre-existing Partitions are not longer than 10 minutes of program time. Encoders shall insert new Partitions to meet this requirement. This requirement extends to D-10 essences that, in other contexts and as described in SMPTE RDD 3:2008, are not to be partitioned.

Decoders shall be capable of reading files with Partitions as described in this section.

The Header Partition shall be marked closed and complete.

6.2.3.3 Shim Parameter Table for Essence Partitions

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Essence Partition Strategy	Defines whether the essence is a single partition or divided into multiple partitions.	essence_partition_strategy	Strong	Single Multiple

6.2.4 Generic Stream Partitions

6.2.4.1 Generic Stream Partitions and Embedding Data (informative)

Generic Stream Partitions (SMPTE ST 410:2008) are containers for generic data streams that could be continuous or tied to the timeline, including classes of metadata that cannot be referenced from MXF Header Metadata. Depending on the entity type, a Generic Stream Partition could be associated with an instance of a Descriptive Metadata Scheme (DMS), as specified below.

Data streams in AS-07 Generic Stream Partitions that consist of Timed Text or EBU STL (both specified in section 6.2.12) will be considered to be essences, will be referenced in tracks in the file's Material Package and Top Level Source Package, and will influence the determination of the file's Operational Pattern. Other text-based and binary data in AS-07 files will generally not be considered to be essences and will not influence the determination of an AS-07 file's Operational Pattern.

Category	Entity type	How described in file metadata?	Main informative and normative sections
AS-07 Essence Binary Data Objects			
	EBU STL	Caption data Descriptors, no DMS Standard: SMPTE ST 2075:2013	6.2.12.7
	Other Essence Data	<i>Deferred</i>	
AS-07 Non-Essence Binary Data Objects			
	Binary Associated Materials	AS_07_BD_GSP_DMS	6.2.4.1.2
AS-07 Essence Textual Data			
	SMPTE and EBU Timed Text	Caption data Descriptors, no DMS	6.2.12.6 6.2.12.7
AS-07 Non-Essence Textual Data			
	Supplementary Metadata and Manifest	AS_07_TD_GSP_DMS	6.2.4.1.4

The informative sections that follow provide information about entities that could be carried in AS-07 Generic Stream Partitions.

6.2.4.1.1 AS-07 Essence Binary Data Objects (informative)

6.2.4.1.1.1 EBU STL (informative)

EBU STL is the European Broadcast Union (EBU) binary subtitling format standardized in EBU Tech 3264 (1991), and it is related to the timeline and as such is considered essence data. Starting in 2013, EBU is encouraging members to adopt XML-based EBU Timed Text or EBU TT as a replacement for EBU STL, a form of encouragement reinforced in AS-07 in 6.2.12.

Unlike non-essence embedded binary data, EBU STL does not require a DMS. Instead, EBU STL is described by appropriate Descriptors as detailed in 6.2.12.7.

6.2.4.1.1.2 Other Essence Data (informative)

Other forms of binary essence data include examples such as device control data ("dim the theater house lights now"), smell-o-vision, feelies, etc. Directions on these data types are deferred until a later time.

6.2.4.1.2 AS-07 Non-Essence Binary Data Objects (informative)

6.2.4.1.2.1 Binary Associated Materials (informative)

Associated Materials are non-essence binary representations of materials closely associated with the file's primary essences, e.g., scanned images and documents, video trailers, etc. Associated Materials are unrelated to the timeline or could be unevenly distributed along the timeline. Associated Materials contribute to the completeness, comprehensibility, or usability of the information object represented by the AS-07 file. Associated Materials will often take the form of data files such as TIFF, JPEG, MP4, PDF, and the like.

Unlike binary essence data, such as EBU STL, Associated Materials do not have Descriptors and instead require instances of AS_07_TD_GSP_DMS.

6.2.4.1.3 AS-07 Essence Textual Data (informative)

6.2.4.1.3.1 SMPTE and EBU Timed Text Track Files and Timed Text Ancillary Resources (informative)

The carriage of SMPTE ST 2052-1:2010 Timed Text, EBU Timed Text including DCP Timed Text Ancillary Resources such as pre-rendered open captions or font data (as described in ST 429-5: 2009) is important to organizations that use AS-07 files. Among other benefits, this carriage will permit the easy extraction and subsequent indexing of the textual data, thereby supporting the creation of a rich layer of searchable data in a moving image archive or library. Unlike other types of embedded textual data in GSPs, Timed Text does not require a DMS. Instead, Timed Text and Ancillary Resources are described by appropriate Descriptors as detailed in 6.2.12.6 and 6.2.12.7.

6.2.4.1.4 AS-07 Non-Essence Textual Data (informative)

6.2.4.1.4.1 Supplementary Metadata and Manifest (informative)

Supplementary Metadata augments the metadata required by the MXF standards as specified in AS-07 (e.g., metadata in headers, Descriptive Metadata Schemes, etc.). Supplementary Metadata can consist of organization-specific descriptive ("cataloging") or administrative metadata, or specialized forms of Process Metadata. It is often structured as XML.

One form of supplementary metadata common in the cultural heritage community is frame-by-frame "logging" metadata from the digital conversion process. This encoded metadata tracks anomalies in the video stream and is typically of interest in the post-process environment on a special case basis when forensic investigation is needed. Although this metadata contains embedded timecode, it is not considered essence data.

The AS-07 Manifest, specified in section 6.7.1, provides summary information about the AS-07 file and its provenance, an inventory of the AS-07 file's parts and expresses the relationships between them, as well as a structure to contain part-level Message Integrity Codes (MIC, also called Media Integrity Check) data at the level of the edit unit (generally the same as a frame), as specified in section 6.7.1. See appendix H for the formal element definition in the XML schema declaration.

6.2.4.1.5 Descriptive Information About Entities Carried in Generic Stream Partitions (informative)

SMPTE ST 410-2008 states that, in some applications, "the precise nature of the stream data [carried in Generic Stream Partitions] will be unknown or 'dark.'" Although such carriage conforms to the standard and is acceptable in AS-07 files, organizations are encouraged to provide descriptions of the entities that are so carried.

As noted, non-essence binary and text-based data require the AS-07 Generic Stream Partition Descriptive Metadata Scheme specified in section 6.6 and appendix F.1 and, as appropriate, the AS-07 GSP Binary Data Descriptive Metadata Scheme specified in section 6.6.1.3.1 and appendix F.2 and the AS-07 GSP Text-Based Data Descriptive Metadata Scheme specified in section 6.6.1.3.2 and appendix F.3.

6.2.4.2 Generic Stream Partition Encoder Requirements

Encoders shall be capable of producing AS-07 files that contain Generic Stream Partitions (SMPTE ST 410-2008) within MXF Body Partitions and included in the Random Index Pack. Encoders shall be able to receive a Generic Stream Payload and write it to a valid Generic Stream Partition. Encoders shall accommodate any of the data stream types defined in Annex A of SMPTE ST 410-2008. Depending on the type of data contained, Generic Stream data may be distributed over several Generic Stream Partitions but each Generic Stream Partition shall contain only data from a single Generic Stream.

Encoders shall assign each Generic Stream Partition a StreamID (SID) that is unique within the file.

Encoders shall treat data streams in AS-07 Generic Stream Partitions that consist of Timed Text or EBU STL (both specified in section 6.2.12) as essences, and shall reference them in tracks in the file's Material Package and Top Level Source Package, and use them to determine the file's Operational Pattern (OP1b when Timed Text is present).

As described in SMPTE 429-5, the Timed Text resource may refer to Ancillary Resources such as fonts and sub-pictures. All Ancillary Resources referenced by the Timed Text Resource shall be contained within the Timed Text Track File in separate Generic Stream Partitions.

Generic Stream Partitions that consist of Timed Text, EBU STL or DCP Timed Text Ancillary Resources do not require a DMS but rather are described by appropriate Descriptors as detailed in 6.2.12.

For each instance of a Generic Stream Partition containing non-essence binary or textual data as described in 6.2.4.1.2 and 6.2.4.1.4, encoders shall create an instance of AS_07_BD_GSP_DMS or AS_07_TD_GSP_DMS as appropriate. See 6.6.1.3 and appendixes D, E and F for more information.

When required by a shim, encoders shall wrap the Manifest according to SMPTE RP 2057:2012 and carry it as a form of non-essence textual data in a Generic Stream Partition as specified in section 6.2.4.1.4. The Manifest shall conform to the formal element definition in the XML schema declaration as specified in appendix H. The Manifest shall require an instance of AS_07_TD_GSP_DMS as described in 6.6.1.3.

6.2.4.3 *Generic Stream Partition Decoder Requirements*

Decoders have no responsibility to understand or decode Generic Stream Partition payload content but shall recognize that a given file contains Generic Stream Partitions.

Decoders shall identify and extract the Generic Stream Partition payload and make them available to external applications.

Decoders shall be capable of identifying and reading all Generic Stream Partition Descriptive Metadata tracks as specified in section 6.6.

6.2.5 *Index Tables*

6.2.5.1 *Index Tables (informative)*

Index Tables provide byte offset information within an Essence Container for a given time offset from the start of that Essence Container. If the Essence Container has interleaved data within it, then extra mechanisms are provided for finding the offsets to the individual Essence Elements once the correct time offset is located.

Although the terms CBR (Constant Bit Rate) and VBR (Variable Bit Rate) are familiar and widely used to categorize essence, SMPTE ST 377-1:2011, the main MXF standard, uses the terms CBE (Constant Bytes per Element) and VBE (Variable Bytes per Element) to define different kinds of Index Tables. VBE index tables may be used for CBR essence, and (with the use of KLV fill) CBE index tables may be used for VBR essence.

CBR and VBR essences are often mixed in an MXF file, making Index Table design challenging. One example is interleaving 48kHz audio with 30000/1001 video. The frequent use of VBR essences or a mix of CBR and VBR essences underlies the general advice offered by broadcast professionals: use VBE tables unless you are certain that your file can be supported by the simpler CBE index tables.

The greater simplicity of CBE index tables results from the requirement that they provide EditUnitByteCount data and omit the Index Entry Array, as specified in ST 377-1:2011 section 11.1.9 (Constant Edit Unit Size). Meanwhile, a specialized "sparse" or "partial" design for VBE index tables is specified in ST 377-1:2011 section 11.3 (Partial / Sparse Index Tables for VBE Essence). These are permitted in AS-07 files; however AS-07 contains no other conformance points for partial or sparse index tables.

6.2.5.2 *Index Tables*

AS-07 encoders shall write full MXF Index Tables, compliant with SMPTE ST 377-1:2011, including Amd 2:2012. The full Index Tables shall index every frame of every Track in the file.

At each partition point in a given frame wrapped Essence component file, the Index Partition shall follow one of the patterns specified in SMPTE ST 377-1:2011 Amd 2:2012 (table 26). This shall be specified by the shim.

The zero position of the Index corresponds to the start of the essence including pre-charge as specified in SMPTE ST 377-1:2011 (section 11, Index Table). Therefore, the first IndexTableSegment indicates an IndexStartPosition equal to zero. Shims may require a particular combination of Index Tables.

Decoders shall be capable of reading files with Index Tables as described in this section.

6.2.5.3 Shim Parameter Table for Index Tables

Dimension	Description: what may be constrained	Shim parameter	AS-07 constraint	AS-07 values
Single index location	If all Index Table Segments that compose one Complete Index Table are in one Partition, value shall be TRUE. Else (multiple Partitions), value shall be False.	single_index_location	Moderate	True False
Single essence location	If all Essence Containers are in one Partition, the value shall be TRUE. Else, (Essence Container Segments in multiple Partitions), value shall be FALSE.	single_essence_location	Moderate	True False
Forward index direction	If all Index Table Segments that compose one Complete Index Table precede Essence Container Segments that they index, value shall be TRUE. Else (Index Table Segments follow Essence Container Segments), value shall be FALSE.	forward_index_direction	Moderate	True False
CBE Index Tables	Use of Index Tables for CBE essences that omit the Index Entry Array (SMPTE ST 377-1:2011, section 11.1.9).	cbe_index_table	Moderate	Mandated, Forbidden, Encouraged, Permitted
VBE Index Tables	Use of Index Tables for VBE essences that employ partial or sparse tables (SMPTE ST 377-1:2011, section 11.3).	vbe_index_tables	Moderate	Mandated, Forbidden, Encouraged, Permitted

6.2.6 Generic Container

AS-07 encoders shall map essences to the frame-based wrapping mode defined in ST 379-2, except for the wrapping exceptions identified in section 6.2.2.2 above.

AS-07 files that encode D-10 shall map Essence into the MXF Generic Container as specified by SMPTE ST 386:2004 (Mapping Type D-10 Essence Data to the MXF Generic Container).

6.2.6.1 Generic container mapping for JPEG 2000 codestreams (informative)

As specified in 6.2.10.2, JPEG 2000 broadcast-profile and IMF-profile codestreams (ISO/IEC 15444-1:2004/Amd 3:2010 and ISO/IEC 15444-1:2004/Amd 8:2015) are to be carried in a SMPTE ST 422:2014-compliant GC Element.

6.2.7 System Item

AS-07 encoders shall create System Items in Essence Containers following the requirements of SMPTE ST 379-1 or ST 379-2. AS-07 decoders shall be capable of decoding the Master Timecode as carried in System Items of AS-07 files.

6.2.8 Random Index Pack

AS-07 encoders shall write a Random Index Pack per SMPTE ST 377-1:2011 into a closed and complete AS-07 file. Decoders may use a Random Index Pack if one is present. When reading an AS-07 file, decoders may use other means, such as building data structures equivalent to a Random Index Pack, instead.

6.2.9 KAG Size

AS-07 encoders shall write files with the default KLV Alignment Grid of 1 unless this value conflicts with an underlying essence container specification. When a conflict exists, the value in that essence container specification shall be used. AS-07 files may contain more than one KLV Alignment Grid Size value but that value shall be constant (no variation) for each essence container. For ST 386:2004 "Mapping Type D-10 Essence Data to the MXF Generic Container," the KLV Alignment Grid is 512.

Decoders shall not rely upon any specific KAG Size.

6.2.10 Picture Essence Encoding

6.2.10.1 Picture Essences

6.2.10.1.1 Broad Range of Picture Essences Possible (informative)

Moving image picture content that is wrapped by AS-07 will include a wide range of types: uncompressed, lossless compressed, or lossy compressed. The rasters may range to sizes as great as 8Kx8K, and picture may be in any bit depth, color mode or space, and interlaced or progressive. In the future, organizations that archive or preserve moving image content wrapped in AS-07 may include 3D and high frame rate content and such elements as synchronized multiple picture tracks, and other formats still in development at this writing. Some of these types of picture essences are still emergent and have not been defined and specified in this initial edition of AS-07.

The initial edition of AS-07 is intended to serve the needs of memory institution and other archives with a long term mission. Thus the first shim to be drafted is the Baseband Shim specified in appendix J, and designed to support one key priority for such archives: the reformatting of older analog and digital videotapes and the encoding and packaging of "live" video streams. AS-07 Baseband Shim files are for items derived from baseband video, understood to encompass both analog baseband and uncompressed digital video, and encoders will typically process a baseband (uncompressed) signal. For high picture quality the required preferred picture encodings for the baseband shim are those described in sections 6.2.10.2 (JPEG 2000 picture encoding) and 6.2.10.3 (uncompressed picture).

An additional priority, anticipated for the second shim and the second edition of AS-07, concerns the packaging and archiving of born digital content items in their lossy acquisition encodings, e.g., MPEG-2, DV, and the like. Such picture encodings are described in section 6.2.10.4 ("retain lossy encoding as acquired").

Additional future shims will focus on moving image content that results from film scanning or digital theatrical motion picture production.

6.2.10.1.2 MXF Picture Essence Descriptors and Subdescriptors in AS-07 (informative)

The use of appropriate picture essence types is important when preparing video content for archiving and preservation, as is the proper characterization of these essences in metadata Descriptors and Subdescriptors, which AS-07 uses to express its constraints on picture essences. Using terminology commonly found in SMPTE standards, two important sets of picture essence characteristics are:

1. *Essence type, pixel layout and bit depth.* Is the essence in this file CDCI (Color Difference Component Image) or RGBA (Red Green Blue Alpha), and what is the pixel layout and bit depth?
2. *Picture format.* For the essence in this file, what is the raster, aspect ratio, and frame rate?

Regarding metadata, SMPTE ST 377-1:2011 (and earlier versions) provides MXF files with two different options for Picture Essence Descriptors: CDCI and RGBA. There is a potential for confusion since the sets of Properties for each Descriptor are slightly different. For example, the CDCI Descriptor has a Component Bit Depth Property while the RGBA Descriptor has a PixelLayout Property. When JPEG 2000 picture essences are present, both the CDCI and RGBA Descriptors can be augmented by the J2CLayout Subdescriptor, standardized in ST 377-1 and in ST 422:2014. When both Descriptor and Subdescriptor are used, AS-07 uses the Descriptor to

describe the essence in its uncompressed state, while the Subdescriptor describes the essence as compressed. (Readers should be aware that SMPTE ST 377-1 and some other SMPTE standards use the ambiguous shorthand YUV for certain color-difference-component picture essences. In most cases, the reference is to the YCbCr or Y'CbCr color model.)

In order to (a) minimize confusion and (b) support the future development of a machine-readable expression of the AS-07 specification, AS-07 shim parameter tables define the metadata expressions for Pixel Layout, Component Bit Depth, Picture Format, and J2CLayout in a repetitive fashion. In effect, the parameters play out this way:

- CDCI essence
 - CDCI Descriptor is used, and its properties and values provide raster, aspect ratio, and frame rate data (values for uncompressed, when the J2CLayout Subdescriptor is used)
 - Component Bit Depth property provides bits-per-sample data
 - J2CLayout Subdescriptor provides JPEG 2000 pixel layout, when relevant (values for compressed essence)
- RGBA essence
 - RGBA Descriptor is used, and its properties and values provide raster, aspect ratio, and frame rate data (values for uncompressed, when the J2CLayout Subdescriptor is used)
 - PixelLayout property (which includes expression of bit depth) is used, ignored when not relevant (as for JPEG 2000 essences)
 - J2CLayout Subdescriptor provides JPEG 2000 pixel layout (which includes expression of bit depth), when relevant (values for compressed essence)

For picture essence metadata, the AS-07 specification takes advantage of the path-finding Interoperable Master Format (IMF) standards, especially SMPTE ST 2067-20:2013 (Interoperable Master Format — Application #2), with its focus on "video" content. Meanwhile, in this version of AS-07, the most complete statement of the essence metadata sets will be found in appendix J, in the table that lists the AS-07 general constraints and the additional constraints on the Baseband Shim. (Additional shims will be developed in the future and they may have different constraints.)

6.2.10.1.3 Picture Essences general requirement

AS-07 encoders shall encode Picture Essences as follows: JPEG 2000 as specified in section 6.2.10.2; uncompressed picture as specified in section 6.2.10.3; selected encodings to be retained from source materials as specified in section 6.2.10.4.

6.2.10.2 Picture Essence – JPEG 2000 Compressed (Lossless or Lossy)

6.2.10.2.1 JPEG 2000 Essences and SMPTE ST 422 (informative)

This encoding, especially in the lossless or reversible mode, is typically selected by an archive that is formatting or reformatting content as a part of its own pre-ingest or ingest activity, e.g., transferring content from a videotape carrier, or scanning film, and also prefers to store a reduced-data file as compared to an uncompressed file. Although archives with a focus on the reformatting of old videotapes will employ only YUV-based components (e.g., YCbCr), use cases relevant for other archives will require the use of RGB- or XYZ-based components. There is an emerging practice to treat some analog source materials in a High Dynamic Range manner and for this reason the AS-07 Baseband Shim (appendix J) includes 16-bit sampling under the *permitted_pixel_layout* parameter.

The required carriage for JPEG 2000 essences in section 6.2.10.2.2 references SMPTE ST 422:2014, which specifies the mapping for six possible cases, three of which are permitted in AS-07 files:

Case P1. Progressive scan frame wrapping, 1 frame per KLV element.

Case I1. Interlaced scan frame wrapping, 1 field per KLV Element. An essence container that wraps JPEG 2000 compressed interlaced data with one field per KLV Element and one frame per Content

Package shall comprise one or more pairs of KLV triplets each of which shall contain one JPEG 2000 codestream. Case *I1* was developed to serve needs within the digital cinema community and its use is not anticipated for video recordings. Thus it is not an option for the Baseband Shim.

Case I2. Interlaced scan frame wrapping, 2 fields per KLV Element. An essence container that wraps JPEG 2000 compressed interlaced data with two fields per KLV Element and one frame per Content Package shall comprise one or more KLV triplets each of which shall contain two JPEG 2000 codestreams. The general use of this case is anticipated for video recordings.

6.2.10.2.2 JPEG 2000 Essences and SMPTE ST 422

AS-07 encoders shall place JPEG 2000 picture essences in a SMPTE ST 422-compliant GC Element. Progressive-scan picture data in JPEG 2000 encodings shall be formatted in accordance with case *P1* as specified in SMPTE ST 422:2014, section 6.3, and labeled *06h* as specified in section 6.4 table 2. Interlaced picture data in JPEG 2000 encodings shall be formatted in accordance with case *I1* or case *I2* as specified in SMPTE ST 422:2014, section 6.3, and labeled *03h* or *04h* respectively as specified in section 6.4 table 2.

AS-07 encoders shall produce YUV, RGB, or XYZ *J2CLayouts* permitted by the following three profile amendments to ISO/IEC 15444-1:2004 (JPEG 2000 core coding): Amd 1:2006, JPEG 2000 Core Coding Profiles for digital cinema applications: Profiles for 4K and 2K; Amd 3:2010, JPEG 2000 Core Coding Broadcast Profiles: Profile levels 6 and 7 (lossless) and levels 1 through 5 (lossy); and Amd 8:2015, Profiles for an interoperable master format IMF, but this may be constrained by a shim.

The *Essence Descriptors* provided by AS07 encoders shall conform to the CDCIDescriptor (Color Difference Component Image Picture Essence Descriptor) specified in SMPTE ST 377-1:2011 annex F.4.2 or to the RGBADescriptor (Red Green Blue Alpha Picture Essence Descriptor) specified in SMPTE ST 377-1:2011 annex F.4.3 (and referenced in ST 422:2014 in table 6) but this may be constrained by a shim. AS-07 encoders shall provide the JPEG 2000 picture Subdescriptor that includes the *J2CLayout* property, the format of which shall conform to ST 422:2014. The CDCI and RGBA Descriptors shall describe the essence in its uncompressed form and the J2CLayout property shall describe the essence as compressed.

For CDCIDescriptors, any bit-depth constraint for a shim shall be expressed in terms of the Component Depth property. Shims may also place other constraints on CDCI essences expressed in terms of CDCI Descriptors.

For the RGBADescriptor, the *PixelLayout* property should be made equal to any permitted in SMPTE 377-1:2011. Regarding shim constraints for AS-07 files that carry RGBA essences, constraints shall be expressed in terms of the *J2CLayout* property and/or in terms of RGBA Descriptors.

The *Essence Container Label* shall be provided as indicated in the first paragraph in this subsection. The essence descriptors and essence container label shall conform to SMPTE ST 422:2014.

6.2.10.2.3 JPEG 2000 decoder requirement

AS-07 decoders shall be capable of decoding essences as specified in section 6.2.10.2.2.

6.2.10.2.4 Shim Parameter Table for Picture Essence – JPEG 2000 Compressed

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Picture family for JPEG 2000	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	<p>Conform to ISO/IEC 15444-1:2004/Amd 3:2010; JPEG 2000 Core Coding Broadcast Profiles: Profile levels 6 and 7 (lossless) and levels 1 through 5 (lossy).</p> <p>Conform to ISO/IEC 15444-1:2004/Amd 1:2006; JPEG 2000 Core Coding Profiles for digital cinema applications: Profiles for 4K and 2K (lossy)</p> <p>Conform to ISO/IEC 15444-1:2004/Amd 8:2015; Profiles for an interoperable master format IMF</p>

Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor
Picture format (CDCI)	If Descriptor is CDCI, picture raster, aspect ratio, and frame rate	picture_format_CDCI	Moderate	If CDCI Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.
Permitted component depth (CDCI)	if Descriptor is CDCI, <i>Component Depth</i> types that may be present in the file	permitted_component_depth_CDCI	Moderate	If CDCI Descriptor: Any permitted by SMPTE ST 377-1:2011, sections F.4.2 and G.2.26.
Permitted J2CLayout (CDCI)	if Descriptor is CDCI, <i>PixelLayout</i> types that may be present in the file, with J2CLayout subdescriptor	permitted_J2C_layout_CDCI	Moderate	If CDCI Descriptor, any permitted by SMPTE ST 422:2014 Shall not be present.
Picture format (RGBA)	if Descriptor is RGBA, picture raster, aspect ratio, and frame rate	picture_format_RGBA	Moderate	If RGBA Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.
Permitted pixel layout (RGBA)	if Descriptor is RGBA, <i>PixelLayout</i> types that may be present in the file	permitted_pixel_layout_RGBA	Moderate	If RGBA Descriptor, any permitted by SMPTE 377-1:2011.
Permitted J2C layout (RGBA)	if Descriptor is RGBA, <i>J2CLayout</i> types that may be present in the file, with J2CLayout subdescriptor	permitted_J2C_layout_RGBA	Moderate	If RGBA Descriptor, any permitted by SMPTE ST 422:2014 Shall not be present.
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	SD 360 Mbps* HD 1.5 Gbps* Will expand in future
Permitted containers	Essence container types that may be present in the file.	permitted_essence_container	Moderate	Any of MXFGCJP2K_P1 MXFGCJP2K_I1 MXFGCJP2K_I2

* Informative note: These values represent the maximum possible bit rates needed to encode an SDI-based stream as JPEG 2000. In rare instances, e.g., with complex imagery, the JPEG 2000 bit rate can exceed that of the SDI stream itself.

6.2.10.2.5 Shim Parameter Table for Picture Essence – JPEG 2000 Compressed (informative)

The following values (or value categories) are anticipated to be added to AS-07 as it is extended in future editions:

Dimension	AS-07 Values to be refined and added in future edition
Picture family for JPEG 2000	Additional to-be-published ISO/IEC JPEG 2000 broadcast profiles. Other, non-ISO/IEC JPEG 2000 profiles.
Picture raster format	2K 4K 8K
Picture bitrate	Higher rates for rasters greater than 1080p, HFR, HDR, 3D, etc.

6.2.10.3 Picture Essence – Uncompressed

6.2.10.3.1 Uncompressed picture essences (informative)

This encoding is typically selected by an archive that prefers to store an uncompressed file, and that is formatting or reformatting content as a part of its own pre-ingest or ingest activity, e.g., transferring content from a videotape carrier, or scanning film. Although archives with a focus on the reformatting of old videotapes will employ only YUV-based components (e.g., YCbCr), use cases relevant for other archives will require the use of RGB- or XYZ-based components.

In order to accommodate AS-07 timecode (section 6.4), VBI and ancillary data (6.2.13), and content integrity (6.7.2) elements, essence containers must use frame-wrapping rather than clip-wrapping.

6.2.10.3.2 Uncompressed picture essences

AS-07 encoders shall produce YUV, RGB, or XYZ essences but this may be constrained by a shim. The permitted ITU-R formats may be any established by the International Telecommunication Union Radiocommunication sector or, if fully specified in a shim, an equivalent formulation. AS-07 encoders shall frame-wrap uncompressed essences in a SMPTE ST 384:2005-compliant GC Element.

The *Essence Descriptors* shall conform to the CDCIDescriptor (Color Difference Component Image Picture Essence Descriptor) specified in SMPTE ST 377-1:2011 annex F.4.2 or to the RGBADescriptor (Red Green Blue Alpha Picture Essence Descriptor) specified in SMPTE ST 377-1:2011 annex F.4.3 but this may be constrained by a shim.

For CDCI Descriptors, any bit-depth constraint for a shim shall be expressed in terms of the *Component Depth* property. Shims may also place other constraints on CDCI essences expressed in terms of the CDCIDescriptor.

For the RGBADescriptor, the *PixelLayout* may be any permitted by SMPTE ST 377-1:2011 and ST 384:2005, but this may be constrained by a shim. Shims may place other constraints on RGBA essences expressed in terms of the RGBADescriptor.

The *Essence Container Label* shall conform to the requirements in section 8 of SMPTE ST 384:2005.

6.2.10.3.3 Uncompressed essence decoder requirement

AS-07 decoders shall be capable of decoding essences as specified in section 6.2.10.3.2.

6.2.10.3.4 Shim Parameter Table for Picture Essence – Uncompressed

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Picture family for uncompressed	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	Uncompressed carried in a SMPTE ST 384-compliant GC Element, using bitstream codings as specified in SMPTE ST 377-1:2009 (or later), annex G.2.25.
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor
Picture format (CDCI)	If Descriptor is CDCI, picture raster, aspect ratio, and frame rate	picture_format_CDCI	Moderate	If CDCI Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.
Permitted component depth (CDCI)	if Descriptor is CDCI, <i>Component Depth</i> types that may be present in the file	permitted_component_depth_CDCI	Moderate	If CDCI Descriptor: Any permitted by SMPTE ST 377-1:2011, sections F.4.2 and G.2.26.
Permitted J2C layout (CDCI)	if Descriptor is CDCI, <i>J2CLayout</i> types that may be present in the file, if the Descriptor is CDCI	permitted_J2C_layout_CDCI	Moderate	Shall not be present.
Picture format (RGBA)	If Descriptor is RGBA, picture raster, aspect ratio, and frame rate	picture_format_RGBA	Moderate	If RGBA Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.
Permitted pixel layout (RGBA)	<i>PixelLayout</i> types that may be present in the file, if the Descriptor is RGBA	permitted_pixel_layout_RGBA	Moderate	If RGBA Descriptor, any permitted by SMPTE ST 384:2005, SMPTE 377-1:2011, sections F.4.3 and G.2.36.

Permitted J2C layout (RGBA)	<i>J2CLayout</i> types that may be present in the file, if the Descriptor is RGBA	permitted_J2C_layout_RGBA	Moderate	Shall not be present.
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	SD 360 Mbps HD 1.5 Gbps Will expand in future
Permitted pixel layout	<i>PixelLayout</i> types that may be present in the file	permitted_pixel_layout	Moderate	Any
Permitted ITU-R format standards	ITU-R formats that may be present in the file, or an equivalent format if fully specified in a shim	permitted_ITU-R_formats	Gentle	BT.601 (SD) BT.709 (HD) BT.2020 (UHDTV) Specified in a shim Will expand in future
Permitted containers	<i>EssenceContainerLabel</i> types that may be present in the file.	permitted_essence_container	Moderate	Any frame-wrapped container permitted by SMPTE ST 384:2005.

6.2.10.3.5 Shim Parameter Table for Picture Essence – Uncompressed (informative)

The following values (or value categories) are anticipated to be added to AS-07 as it is extended in future editions:

Dimension	AS-07 Values to be refined and added in future edition
Picture family for uncompressed	Digital cinema picture and color spaces (e.g., ACES, X'Y'Z', etc.) Other TBD
Picture raster format	2K 4K 8K
Picture bitrate	Higher rates for rasters greater than 1080p, HFR, HDR, 3D, etc.

6.2.10.4 Picture Essence – Retain Source Encoding as Acquired (informative)

6.2.10.4.1 Retain source encoding (informative)

This parameter is typically selected by an archive that judges the native encoding to be reasonably stable, or that has other reasons to retain content in the form in which has been received, and wishes to wrap and store that encoded "native" bitstream in a standardized manner. Standardized means that there is a SMPTE mapping of the bitstream to the Generic Container. At this writing such mapping exist for the eight picture essence formats listed in section 6.2.10.4.2 and, in addition, the mappings for JPEG 2000 (SMPTE ST 422:2014, see 6.2.10.2) and uncompressed picture (SMPTE ST 384:2005, see 6.2.10.3). Some of the mappings listed in 6.2.10.4.2 call for clip-wrapping, representing the main exception to AS-07's general requirement for frame-wrapping.

In addition to the picture essence types listed in section 6.2.10.4.2, an archive may also acquire and wish to retain essences that employ JPEG 2000 encodings as native bitstreams. For AS-07, these shall be wrapped to conform to the preceding picture essence section (6.2.10.2).

6.2.10.4.2 Retain Source Encoding Essences and MXF GC Mapping

AS-07 encoders shall place encoded essences in GC Elements compliant with the following standards:

- MPEG Streams: SMPTE ST 381-1:2005 and SMPTE ST 381-2:2011
- DV-DIF Data: SMPTE ST 383:2008
- SDTI-CP Essence and Metadata: SMPTE ST 385:2004
- Type D-10 Essence Data: SMPTE ST 386:2004 (Archived 2010)
- Type D-11 Essence Data: SMPTE ST 387:2004 (Archived 2010)
- VC-3 Coding Units: SMPTE ST 2019-4:2009
- VC-1: SMPTE ST 2037:2009
- AVC Streams: SMPTE ST 381-3 (anticipated in 2014)

In order to accommodate AS-07 timecode (section 6.4), VBI and ancillary data (6.2.13), and content integrity (6.7.2) elements, essence containers from the preceding standards shall use frame-wrapping rather than clip-

wrapping, unless an exception is provided by a shim in the form of a file structure that accommodates both frame-wrapped VI, ANC, sound, and data, and a clip-wrapped picture element.

6.2.10.4.3 Retained source encoding decoder requirement

AS-07 decoders shall be capable of decoding essences as specified in section 6.2.10.4.2.

6.2.10.4.4 Retain Source Encoding Essences and MXF GC Mapping (informative)

Additional picture encodings will be added to the preceding set as additional MXF mapping standards are published by SMPTE.

6.2.10.4.5 Shim Parameter Table for Picture Essence – Retain Source Encoding as Acquired

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Picture family for retain born digital as acquired	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	MPEG (ST 381-1 and 381-2) DV-DIF (ST 383) SDTI-CP (ST 385) D-10 (ST 386) D-11 (ST 387) VC-3 (ST 2019) VC-1 (ST 2037) AVC (ST 381-3) Forbidden
Picture format	Picture raster and aspect ratio	picture_format	Moderate	Any raster permitted by ST 352:2013 Forbidden
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	Up to 1.5 Gbps Forbidden
Permitted pixel layout	<i>Pixellayout</i> types that may be present in the file	pixel_layout	Moderate	Any permitted by the following MXF mapping standards: SMPTE ST 381-1:2005 SMPTE ST 381-2:2011 SMPTE ST 383:2008 SMPTE ST 385:2004 SMPTE ST 386:2004 SMPTE ST 387:2004 SMPTE ST 2019-1:2009 SMPTE ST 2037: 2009 SMPTE ST 381-3 (forthcoming) Forbidden
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor Forbidden
Permitted containers	Essence container types that may be present in the file.	permitted_essence_container	Moderate	Any frame-wrapped container permitted by the following MXF mapping standards: SMPTE ST 381-1:2005 SMPTE ST 381-2:2011 SMPTE ST 383:2008 SMPTE ST 385:2004 SMPTE ST 386:2004 SMPTE ST 387:2004 SMPTE ST 2019-1:2009 SMPTE ST 2037: 2009 SMPTE ST 381-3 (forthcoming) Forbidden

6.2.11 Audio Essence Encoding

6.2.11.1 MXF options for carriage of waveform audio (informative)

The mapping of audio to the MXF Generic Container is governed by SMPTE ST 382:2007, *Material Exchange Format — Mapping AES3 and Broadcast Wave Audio into the MXF Generic Container*. This standard defines the mapping of digital audio data, ancillary data and metadata from the Broadcast Wave Format (BWF) and from AES3 digital audio data into sound essence elements. Several options for audio type and carriage are specified. Waveform data may be uncompressed PCM audio data, compressed data or raw data as in BWF, AES3, or SMPTE 337M carried in a single AES3 stream. As specified below, AS-07 requires the use of the BWF container. Many archiving organizations strongly endorse linear PCM encoding and, at this writing, favor 48 kHz sampling with 24 bits per sample.

In addition to the familiar linear PCM sampling rates of 32 (for DV content), 44.1, 48, 96, and 192 kHz, the AS-07 specification allows for additional "pull-down" and "pull-up" frequencies for fractional frame rates: 31968, 32032, 44056, 44144, 47952, 48048, 88112, 88288, 95904, 96096, 191808, and 192192 Hz. These are listed for completeness and to accommodate the future rewrapping of certain types of born digital content. The initial AS-07 Baseband Shim (appendix J), however, is limited to two sampling frequencies: 48 kHz (24 and 16 bits) and 96 (24 bits).

6.2.11.2 Multiple Audio Encodings and Wrappings Permitted (non-D-10 Essences)

The provisions in this section shall apply except when using D-10 Essence Data.

Audio shall be PCM, AC-3, or Dolby E. The number of channels is unlimited, and as many tracks shall be employed as needed to represent the number of channels. PCM Audio may have any values up to 192kHz at 24 bit word length.

For PCM audio data, AS-07 encoders shall create files that carry each PCM track (mono or stereo pair) in a SMPTE ST 382:2007-compliant MXF GC Element within a BWF Container, as described in ST382.

For AC-3 audio data, AS-07 encoders shall create files that carry each AC-3 track in a SMPTE 337/338/339/340 container in a SMPTE 382M:2007-compliant MXF GC Element.

Regarding interleaving and frame- or clip-wrapping, audio essences shall be treated as specified in section 6.1.2.2 (Interleaving, Frame-, and Clip-wrapping). Audio data that accompanies picture shall be treated in a manner that permits synchronization with the picture information.

6.2.11.3 Audio Encoding for D-10 Essences

In order to accommodate legacy 8 channel AES audio (PCM channels) and other audio formats when wrapping D-10 essence data, encoders shall adhere to ST 386:2004, *Mapping Type D-10 Essence Data to the MXF Generic Container*.

6.2.11.4 Language repertoire and tagging (informative)

AS-07 shims may restrict files to certain languages in the soundtrack, sometimes called the language repertoire. In general, users are encouraged to tag languages (primary and secondary) in AS_07_Core_DMS (section 6.6.1) but this is optional unless required by a shim. However, when a shim does restrict soundtracks to certain languages, tagging is a requirement. As indicated in appendix D.1, two tags are provided for AS_07_Core_DMS: *AS_07_Core_AudioTrackPrimaryLanguage* and *AS_07_Core_AudioTrackSecondaryLanguage*. Many organizations will provide encoders with default language values to insert. In the U.S., for example, this will often be the code value for American English ("en-US").

6.2.11.5 Language repertoire and tagging

AS-07 producers are encouraged to tag soundtrack languages (primary and secondary) in AS_07_Core_DMS (section 6.6.1) but this is optional unless required by a shim. The range of languages may be constrained by a shim, where the shim's language specification shall employ the codes provided in RFC 5646 (2009; Tags for

Identifying Languages). When a shim does constrain AS-07 soundtracks to certain languages, tags are required.

6.2.11.6 Shim Parameter Table for Audio Essences

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Sound family	Sound signal schemes (compression or sampling or other)	sound_family	Moderate	PCM 192 kHz 24 bit PCM 96 kHz 24 bit PCM 88.2 kHz 24 bit PCM 48 kHz 24 bit PCM 48 kHz 16 bit PCM 44.1 kHz 16 bit PCM 32 kHz 12 bit Additional pull-down and pull-up PCM sampling frequencies for fractional frame rates: 192192, 191808, 96096, 95904, 88112, 88288, 48048, 47952, 44144, 44056, 32032, and 31968 Hz. AC-3 Other MPEG schemes, e.g., layer 2 or layer 3 (MP3), or AAC (ST 338)
Sound language tagging	Tagging of soundtrack languages that may be present, to be identified in AS_07_Core_DMS using codes from RFC 5646 (2009), e.g., en-US, fr-CA. Tagging mandated when languages are required.	sound_language_tagging	Moderate	Mandated, Forbidden, Encouraged, Permitted
Sound language repertoire	Soundtrack languages required by a shim	sound_language_repertoire	Moderate	Identifiers selected from RFC 5646 Null

6.2.11.7 Audio Track Layout

6.2.11.7.1 Audio Track Layout (informative)

AS-07 preservation and archiving files generally carry reformatted, transcoded, or transwrapped audiovisual content from a wide variety of source material with widely varying sound tracks. In terms of sound or aural field, examples range from silent research footage to monaural oral history recordings to performances with stereo, surround, or multichannel audio. In other cases, the tracks on a source item will include Descriptive Video Service (DVS), Second (or Separate) Audio Program (SAP), annotations (like a director's commentary for a dramatic program), as well as other types of multiple language content or other versioning elements. Sound tracks on certain videotape formats may also carry timecode data, e.g., the carriage of LTC on track three of the 1-inch type C format. Archivists wish to retain this source data in AS-07 files and require metadata that labels the tracks in a manner that will serve future users.

Source material audio tracks may or may not be labeled according to a standard or industry convention. When so labeled, the tagging may be in terms of such standards as SMPTE Multi-Channel Audio (MCA; SMPTE ST 377-4), the EBU track allocation templates specified by EBU R 48 or EBU R 123, or by an industry convention promulgated by a broadcast network, such as the PBS Audio Configuration specification cited in AS-03.

Appendix B in this initial publication of AS-07 provides identifiers for certain audio layouts. Users of AS-07 should note that these identifiers may be modified or extended in the future in order to keep pace with layout-specification developments within the community.

AS-07 files that conform to the requirements that follow will carry identifiers in the AS_07_Core_DMS_AudioTrackLayout element and may also carry comments in the AS_07_Core_DMS_AudioTrackLayoutComment element (Section 6.6.1 and appendix D.1). When carrying SMPTE ST 377-4 MCA, AS-07 files are additionally required to carry descriptors and subdescriptors that conform to SMPTE ST 377-1:2011 and SMPTE ST 377-4:2012. Some of the AS_07_Core_DMS_AudioTrackLayout values listed in appendix B cover configurations that are detected by the encoder but for which little information can be provided. Other values cover layouts for which identification can be provided to the encoder (or added in a post-process), ranging from common two-, three-, and four-track variants to the classes specified for SMPTE MCA and in EBU R 48/EBU R 123. Many organizations will permit the encoder to provide minimal information when initially producing files and will subsequently update these values in a post-process.

The option of adding comments in the AS_07_Core_DMS_AudioTrackLayoutComment element (section 6.6.1 and appendix D.1) is intended to support technical information about a track and is not intended for description of the "intellectual" or provenance aspects of the track. That is, a comment might report that a given track is dual mono when the left channel of a stereo signal would be expected. But the comments are not intended to carry information like "track from soundtrack enhancement and re-recording session in 1967."

6.2.11.7.2 Audio Track Layout Identification in AS_07_Core_DMS

AS-07 encoders shall identify audio track layouts by placing the coded values listed in appendix B in the AS_07_Core_DMS_AudioTrackLayout element (Section 6.6.1 and appendix D.1). Encoding devices shall provide a method to permit archive organizations to input the coded value prior to encoding. If organizations do not provide values in advance, the encoder shall make a best effort to identify the tracks and to use codes as defined in tables 0 through 5 in appendix B.

6.2.11.7.3 Audio Track Layout Comments in AS_07_Core_DMS

AS-07 encoders shall provide a method for encoding organization to input comments in the AS_07_Core_DMS_AudioTrackLayoutComment element (Section 6.6.1 and appendix D.1).

6.2.11.7.4 Audio Track Layout Descriptors and Subdescriptors for SMPTE MCA

When the audio content in an AS-07 file consists of SMPTE Multi-Channel Audio (MCA; SMPTE ST 377-4:2012), and when such information is provided by the encoding organization, AS-07 encoders shall provide the Descriptors specified in SMPTE ST 377-1 and the Subdescriptors specified for MCA in SMPTE ST 377-4. Additional relevant information is provided in SMPTE ST 2035:2009, Audio Channel Assignments for Digital Television Recorders (DTRs).

6.2.11.7.5 Audio Track Layout Decoder Requirements

AS-07 decoders shall present sound track data with the appropriate audio track layout information described in 6.2.11.7.2, 6.2.11.7.3 and/or 6.2.11.7.4.

6.2.11.8 Other Provisions

6.2.11.8.1 DialNorm Metadata

If the input to the MXF-file production system includes DialNorm metadata, AS-07 encoders shall include this DialNorm data in the MXF Sound Descriptor GenericSoundEssenceDescriptor:DialNorm.

6.2.11.8.2 NICAM Audio (informative)

NICAM audio, when encountered in historical PAL and SECAM recordings, will require a wrapping specification that has not been developed for this version of AS-07. Such a wrapping is anticipated for a future version. Closed Captioning, Subtitles, Timed Texts and Other Ancillary Data

6.2.12 Captions, Subtitles, and Timed Text

6.2.12.1 Terminology: Captions, Subtitles, and Timed Text (informative)

This specification uses the terms Captions and Subtitles more or less interchangeably, to mean non-XML text intended for display over a timeline, in synchronization with image and sound essence. The term Timed Text carries the same meaning with the added constraint that such text is structured to comply with either the SMPTE or EBU Timed Text XML schema.

6.2.12.2 Preservation and Archiving Goals for Caption, Subtitle, Timed Text, and Teletext Data (informative)

Archivists, especially in memory institutions, wish to produce authentic copies of the material they reformat for preservation. This means that they wish to retain data like closed captioning or subtitles in its original form, to the degree practical. As noted above, this will often be in a binary format, often encoded in the essence stream.

At the same time, file-based carriage of XML-structured Timed Text is very important to archivists. Many archival organizations will want to extract this text and load it into related applications, especially indexing systems that support search-and-retrieval. This desire for easily re-usable XML underpins this specification's request that the "tunneling" approach, so convenient for broadcaster handling of Timed Text, not be employed for AS-07 archive files.

The presence of captions in the file is recorded in the AS_07_Core_DMS_Captions item in the AS-07 Core Descriptive Metadata Scheme. See section 6.6.1.1.

The following table lists the four main types of entities that represent captions, subtitles, timed text, and teletext and provides a summary overview of how they are carried and described in an AS-07 file.

Entity type	Where carried?	How described in file metadata?	Main informative and normative sections
CEA-608 and CEA 708	ANC Packet with track in TLSP	ANCDataDescriptor for track, no GSP-related DMS	6.2.12.3 6.2.12.5 6.2.13
Teletext	ANC Packet with track in TLSP	VBIDataDescriptor for track, no GSP-related DMS	6.2.12.4 6.2.12.5 6.2.13
SMPTE Timed Text	GSP with track in TLSP	Descriptors for track, no GSP-related DMS	6.2.12.6
EBU Timed Text and EBU STL	GSP with track in TLSP	Descriptors for track, no GSP-related DMS	6.2.12.7

6.2.12.3 CEA-608 and CEA-708 (informative)

The sections that follow provide the AS-07 requirements for handling Closed Captions, the binary-format textual data long associated with standard definition NTSC video. When present, the captions governed by the Consumer Electronics Association standard CEA-608 are generally encoded into line 21, considered to be part of the vertical blanking interval and also considered to be part of the active picture area. The preceding statement uses the adverb generally to allow for some variation in past practice. For example, regarding legacy standard definition video sources, analog instances will carry CEA-608 in line 21 while digital instances may vary, including CEA-608 as a digital representation ("dots and dashes") of line 21 or as vertical interval ancillary data (VANC) caption data or even as both. Meanwhile, video servers may employ various semi-proprietary formats to carry VANC and digital line 21. Beyond that, digital legacy MPEG-2 compressed sources may have CEA-608 embedded in the MPEG "Video User Private" bits, while legacy MXF files may have VANC or digital line 21 in ST 436 packets in the essence container. For ATSC (digital television) programming, three streams are encoded in the video: two are backward compatible "line 21" captions, and the third is a set of up to 63 additional caption streams encoded in CEA-708 format.

In addition to closed caption (CC) data, CEA-608 also defines XDS or Extended Data Services (previously known as EDS). XDS is used by TV stations, TV networks, and TV program syndication distributors in the USA for several purposes including "autoclock" time data for automatically setting the clock of newer TVs and VCRs sold in the USA, station identification and V-chip content ratings data. Like CEA-608 CC data, XDS data is also carried on line 21.

CEA-708 is the standard for closed captioning for ATSC digital television (DTV) streams in the United States and Canada. CEA-708 captions consist of binary-format textual data but this data is not carried on line 21 and must be pre-rendered by the receiver. CEA-708 also includes more of the Latin-1 character set as well as stubs to support full UTF-32 captions, and downloadable fonts.

In AS-07, CEA-608 and CEA-708 are considered forms of ancillary data (ANC). See section 6.2.13 for information on ANC.

6.2.12.4 *Teletext (informative)*

Teletext is the text-only closed captioning system for European television.

In AS-07, teletext is considered a form of ANC. See section 6.2.13 for information on ANC.

6.2.12.5 *AS-07 Encoder Requirements for CEA-608, CEA-708, and Teletext*

6.2.12.5.1 *CEA-608 and CEA-708 Data Carriage*

If CEA-608 (CC and XDS) data or CEA-708 DTV captioning data is present, AS-07 encoders shall carry such data in a SMPTE ST 334-1/-2:2007 compliant ANC packet within a frame-wrapped Data Element in the Generic Container as described in SMPTE ST 436:2006; using 8 bit encoding. See section 6.2.13 for more information on ANC packet carriage in AS-07.

In addition to mandatory carriage in the ANC packet:

1. If CEA-608 (CC and XDS) data or CEA-708 DTV captioning data is present in the source material, AS-07 encoders shall preserve CEA-608 and CEA-708 in their native binary format, *and*
2. If CEA-608 (CC and XDS) signals are present in the source material, either as an analog signal or as a digital representation thereof, AS-07 encoders shall preserve these signals.

Note the exception when using ST 386:2004 "Mapping Type D-10 Essence Data to the MXF Generic Container." In that case, the CEA-608 or -708 caption data shall be retained embedded in the stream as delivered.

6.2.12.5.2 *Translation of CEA-608, and -708 to SMPTE Timed Text*

AS-07 encoders should translate CEA-608 and -708 data to SMPTE ST 2052-1 Timed Text in the Preserve Translation Mode (ST 2052-1, section 5.1.2.1), although they may translate to the Enhance Translation Mode (ST 2052-1, section 5.1.2.2). In order to avoid confusion with the binary data as delivered, AS-07 encoders shall not translate to provide Carriage of Binary Data "tunneling," as described in ST 2052-1, section 5.4, and in ST 2052-0:2013 (now in final draft). Translations need not be accomplished using methods outlined in SMPTE RP 2052-10 and RP 2052-11.

6.2.12.6 *SMPTE Timed Text*

6.2.12.6.1 *Carriage of SMPTE Timed Text (informative)*

The AS-07 specification calls for Timed Text to be carried in a Generic Stream Partition, citing SMPTE RP 2057:2011 as the relevant authority. In addition to the GSP carriage required in AS-07, RP 2057 also offers a second method: to carry text-based metadata in the MXF Header Metadata by defining a DM Framework that includes Text-based Sets.

SMPTE TT is not required in AS-07 unless it is present in the source file or created from the translation of line 21, CEA-608, and -708 data. If SMPTE TT is present in the source file, it must be maintained in the AS-07 file.

6.2.12.6.2 AS-07 Encoder Requirements for SMPTE Timed Text

As described in SMPTE 429-5:2009, each Ancillary Resource in a Timed Text Track File shall be entirely contained within an MXF Generic Stream Partition defined by SMPTE ST 410:2008. See section 6.2.4 for more details.

When SMPTE Timed Text is present in an AS-07 file, encoders shall reference the Timed Text in tracks in the file's Material Package and Top Level Source Package as described in SMPTE 429-5: 2009. The Top Level Source Package shall contain one Data Essence Track with a single Data Source Clip. A single Material Package shall be present which shall contain one Data Essence Track with a single Data Source Clip referencing the Top Level Source Package. The operational pattern is designated as OP1b.

The Top Level Source Package shall include a strong reference to a TimedTextDescriptor, which shall describe the Timed Text resource according to SMPTE 429-5:2009, Appendix A2. In accordance with SMPTE 429-5:2009 Appendix A3, the Timed Text resource may be additionally described by the TimedTextResourceSubdescriptor set which may be strongly referenced by the TimedTextDescriptor via the MXF Generic Descriptor (as defined in SMPTE 377-1:2011).

As described in SMPTE 429-5:2009, If the Timed Text references one or more Ancillary Resources, the TimedTextDescriptor shall contain the same number of strong references to TimedTextResourceDescriptors, one for each Ancillary Resource. A TimedTextResource Descriptor contains the AncillaryResourceID and MIMEMediaType of the respective resource, and also the BodySID of the Generic StreamPartition containing the Ancillary Resource data.

Note: It is anticipated that additional Subdescriptor specifications will be developed in future.

6.2.12.7 EBU STL and EBU Timed Text

6.2.12.7.1 EBU STL and EBU Timed Text (informative)

In 2013, the European Broadcast Union began to push its members away from the currently widely used binary EBU STL (subtitling) format, standardized in EBU Tech 3264 (1991). The replacement standard is called EBU-TT or EBU Timed Text, an XML-based subtitling format. In 2012, version 1.0 of EBU-TT part 1 was published as EBU Tech 3350. Like the similar SMPTE TT standard, this specification builds on the W3C Timed text Markup Language (TTML) 1.0 standard. To support the conversion process, EBU has drafted EBU-TT part 2 (EBU Tech 3360), a guide on how to map EBU STL files to EBU-TT. EBU Tech 3360 was published in June 2013 as a v0.9 for comments.

Since files to be archived benefit from Timed Text (see 6.2.12.2), when placed in AS-07 files, EBU-based content must provide subtitling data as Timed Text. Thus, when source material offers only EBU STL, AS-07 requires that it must be converted to EBU-TT. Meanwhile however, in 2013, SMPTE published ST 2075:2013 that specifies the mapping of binary EBU STL files to the MXF Generic Stream, and such carriage may be employed in AS-07 files but not in lieu of conversion and carriage as Timed Text.

EBU-STL is not required in AS-07 unless it is present in the source file. If EBU-STL is present in the source file, it must be maintained in the AS-07 file.

6.2.12.7.2 AS-07 Encoder Requirements for EBU STL

AS-07 encoders shall convert EBU STL data to EBU-TT following the mapping provisions of EBU-TT part 2 (EBU Tech 3360, v.0.9 for comment, June 2013). Additionally, AS-07 encoders may place EBU STL (EBU Tech 3264) data in Generic Stream Partitions in accordance with SMPTE ST 2075:2013.

When EBU STL is present in an AS-07 file, encoders shall ensure that the EBU STL resource be described by a Top Level Source Package as described in SMPTE ST 2075:2013. The Top Level Source Package shall contain one Data Essence Track with a single Data Source Clip. A single Material Package shall be present which shall contain one Data Essence Track with a single Data Source Clip referencing the Top Level Source Package and that the operational pattern is designated as OP1b.

The Top Level Source Package shall include a strong reference to the STLEssenceDescriptor according to SMPTE 2075: 2013, including the STLSubdescriptor to describe multiple languages that are stored in a single STL file which is mapped into a single MXF file.

6.2.12.7.3 AS-07 Encoder Requirements for EBU TT

As described in SMPTE 429-5:2009, each Ancillary Resource in a Timed Text Track File shall be entirely contained within an MXF Generic Stream Partition defined by SMPTE ST 410:2008. See section 6.2.4 for more details.

When EBU Timed Text is present in an AS-07 file, encoders shall reference the Timed Text in tracks in the file's Material Package and Top Level Source Package as described in SMPTE 429-5: 2009. The Top Level Source Package shall contain one Data Essence Track with a single Data Source Clip. A single Material Package shall be present which shall contain one Data Essence Track with a single Data Source Clip referencing the Top Level Source Package. The operational pattern is designated as OP1b.

The Top Level Source Package shall include a strong reference to a TimedTextDescriptor, which shall describe the Timed Text resource according to SMPTE 429-5:2009, Appendix A2. In accordance with SMPTE 429-5:2009 Appendix A3, the Timed Text resource may be additionally described by the TimedTextResourceSubdescriptor set which may be strongly referenced by the TimedTextDescriptor via the MXF Generic Descriptor (as defined in SMPTE 377-1:2011).

As described in SMPTE 429-5:2009, If the Timed Text references one or more Ancillary Resources, the TimedTextDescriptor shall contain the same number of strong references to TimedTextResourceDescriptors, one for each Ancillary Resource. A TimedTextResource Descriptor contains the AncillaryResourceID and MIMEMediaType of the respective resource, and also the BodySID of the Generic StreamPartition containing the Ancillary Resource data.

EBU-TT is not required in AS-07 unless it is present in the source file or created from the translation of EBU STL data. If EBU-TT is present in the source file, it must be maintained in the AS-07 file.

6.2.12.8 Encoder Provision of Timed Text to External Applications

AS-07 encoders shall be capable of providing a copy of SMPTE or EBU Timed Text (if any) to connected applications, i.e., indexers, databases, and readers. See also section 6.2.12.10 pertaining to AS-07 decoders.

6.2.12.9 Shim Parameter Table for Captions, Subtitles, and Timed Text

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Caption	Carriage of CEA-608 or -708 captions (from source material or if newly produced)	caption_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted
Caption signal scheme	Captions signal schemes	caption_scheme	Strong	CEA-608 in SMPTE ST 436:2006 CEA-708 in SMPTE ST 436:2006
EBU Subtitles	Carriage of EBU Tech 3264 STL (from source material or if newly produced)	ebu_stl_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted
SMPTE or EBU Timed Text	Carriage of SMPTE or EBU Timed Text (when converted from CEA-608, CEA-708, or EBU STL, or if newly produced)	tt_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted
Timed Text signal scheme	Timed text signal scheme	tt_scheme	Strong	SMPTE ST 2075:2013 EBU Tech 3350

6.2.12.10 AS-07 Decoder Requirements for Captions, Subtitles, and Timed Text

AS-07 decoders shall read all forms of captions, subtitles, and Timed Text specified in section 6.2.12. Decoders shall provide for the display of all forms of these elements and for the provision of Timed Text to connected applications.

6.2.13 VBI and Other Ancillary Data (ANC)**6.2.13.1 VBI and ANC in AS-07 (informative)**

Ancillary data is information other than the main picture and audio essences and it is carried in a manner that associates it with the essence data. Ancillary data may include forms of captions or metadata or what is called "opaque data." Depending on the type of video at hand, this ancillary data may be carried within the Vertical Blanking Interval lines (VBI lines or VBI data) and/or as Ancillary Data Packets (ANC packets). There are many possible types of ancillary data and, in general, SMPTE ST 436:2006 is followed when creating an MXF file. For clarity in AS-07, however, we provide detailed instructions for binary caption data below, consistent with SMPTE ST 436:2006. (See 6.2.12.1 for additional information about CEA 608 CC and XDS, CEA 708 DTV and teletext.)

6.2.13.2 AS-07 Encoder Requirements for VBI and ANC**6.2.13.2.1 ANC Packet Carriage of Ancillary Data**

When present in the source material, AS-07 shall carry CEA-608 (CC and XDS) data, CEA-708B DTV captioning data, teletext or other ancillary data in a SMPTE ST 334-1/-2:2007 compliant ANC packet within a frame-wrapped Data Element in the Generic Container as described in SMPTE ST 436:2006; using 8 bit encoding. This carriage is in addition to the carriage specified in section 6.2.12.5.1.

Encoders shall reference the ANC packet containing the ancillary data in data tracks in the file's Top Level Source Package.

A single Material Package shall be present which shall contain a Data Essence Track with a single Data Source Clip referencing the Top Level Source Package.

The preceding provisions shall not apply when using ST 386:2004 "Mapping Type D-10 Essence Data to the MXF Generic Container." In that case, the CEA-608 or -708 caption data shall be retained in the form in which it is delivered as described in 6.2.12.5.1.

6.2.13.2.2 CEA-608 and CEA-708 Descriptors

If ANC packets containing CEA-608 or CEA-708 data exist in an AS-07 file, the Top Level Source Package shall include a strong reference to the ANC Data Descriptor as detailed in SMPTE ST 436:2006. The descriptor shall be associated with a Data Track via the MXF Generic Descriptor (as defined in SMPTE 377-1:2011).

Note: It is anticipated that additional CaptionLabelSubdescriptor specifications will be developed in future.

6.2.13.2.3 Teletext Descriptors

If ANC packets containing Teletext data exist in an AS-07 file, the Top Level Source Package shall include a strong reference to the VBI Data Descriptor as detailed in SMPTE ST 436:2006. The descriptor shall be associated with a Data Track via the MXF Generic Descriptor (as defined in SMPTE 377-1:2011).

Note: It is anticipated that additional CaptionLabelSubdescriptor specifications will be developed in future.

6.2.13.3 Shim Parameter Table for VBI and ANC

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
VBI data essence	A list of data essence types permitted in a given shim, including specific parameters such as VBI lines supported.	VBI_data_essence	Strong	[List from SMPTE ST 436] [Any, all]

ANC data essence	A list of supported data essence types permitted in a given shim, including specific parameters such as ANC packet types supported.	ANC_data_essence	Strong	[List from SMPTE ST 291] [Any, all]
------------------	---	------------------	--------	--

6.2.13.4 AS-07 Decoder Requirements for VBI and ANC Data

AS-07 decoders shall read all forms of VBI and ANC specified in section 6.2.12.1 and 6.2.13.2.

6.2.14 Active Format Description (AFD) and Pan-Scan Information

6.2.14.1 Active Format Description (AFD)

AS-07 files shall have an AFD value for the duration of the Picture Track. AS-07 encoders shall format and store AFD (and Bar Data, if present) values according to SMPTE ST 377-1:2011. Constant AFD values shall be stored in the MXF Picture Descriptor; changeable AFD values shall be stored in a SMPTE ST 436:2006-compliant VBI/ANC GC Data Element and shall be formatted according to SMPTE ST 2016-3.

All AFD values specified in SMPTE ST 2016-1:2009, Table 1 (Active Format Description codes), are permitted, however a shim may limit the permissible AFD values to a subset of the values specified in ST 2016-1:2009.

When reformatting video content, AS-07 encoders shall preserve AFD (and Bar Data, if present) values if they are properly formatted. If the source video includes an AFD value listed in SMPTE 2016-1:2009 and formatted per 2016-3:2007, encoders shall preserve and map this data to the appropriate places in the AS-07 file, including the Generic Container.

An AFD value is required. If the source video does not include an AFD value, AS-07 encoders shall insert the value '0000' as well as enabling the user to change this and to specify a value of their choosing.

SMPTE ST 377-1:2011 further describes compliant encoder and decoder behavior with respect to SMPTE ST 2016-1:2009 (Format for Active Format Description and Bar Data). AS-07 implementers are directed to SMPTE ST 377-1:2011 paragraph G.2.5.

6.2.14.2 Pan-Scan Information

Pan-Scan Information is not required in AS-07 files, but it may be present. If included in AS-07 files, AS-07 encoders shall format Pan-Scan Information according to SMPTE ST 2016-2:2007 and SMPTE ST 2016-4:2007, and store it in a SMPTE ST 436:2006-compliant VBI/ANC GC Data Element.

All Pan-Scan values specified in SMPTE ST 2016-2:2007, Table 1 (Pan-Scan informational payload) are permitted, however a shim may limit the permissible Pan-Scan values to a subset of the values specified in SMPTE ST 2016-2:2007.

When reformatting video content, AS-07 encoders shall preserve Pan-Scan Information if it is properly formatted. If the source video includes Pan-Scan Information values that are listed in ST 2016-2:2007 and that are formatted according to 2016-4:2007, AS-07 encoders shall preserve and map this data to the appropriate places in the AS-07 file. AS-07 decoders shall identify and read Pan-Scan codes in the file and provide a method for reporting on their presence with the values indicated. Decoders are not required to interpret the codes and display picture data with Pan-Scan effects applied.

6.2.14.3 Shim Parameter Table for AFD and Pan-Scan

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
AFD codes	Selection of one or more of the 16 codes for AFD (SMPTE ST 2016-1:2009, Table 1)	AFD_codes	Gentle	Any
Pan-Scan	Pan-Scan carriage (SMPTE ST 2016-2:2007)	PanScan_data	Moderate	Mandated

data				Forbidden Encouraged Permitted
------	--	--	--	--------------------------------------

6.3 Operational Pattern Parameters and Constraints

6.3.1 AS-07 Operational Patterns for Item, Segmented, and Collection Files (informative)

AS-07 files employ three standardized MXF Operational Patterns: OP1a, OP1b, and OP3c. The impact of these three patterns for AS-07 files, however, is best understood in terms of three related conceptual structures not governed by standards: simple item files, segmented item files, and collection files. The OP standards and the AS-07 concepts are explained in the following paragraphs.

Simple Item Files

- OP1a. The bread-and-butter work to be supported by AS-07 is the reformatting of old videotapes, or other incoming baseband signal, analog or digital. The resulting files are generally simple in form, with a single picture essence, a single sound essence in Generic Container(s), and a single Material Package.
- OP1b. Simple Item files may also contain out-of-band data, e.g., Timed Text, stored in Generic Stream Partitions. The resulting files contain picture and sound essences in Generic Containers, TT in a Generic Stream Partition, and a single Material Package.

Segmented Item Files

- OP1a with segmentation. For material in segments, e.g., for (i) content from a single videotape that consists of several distinct clips or segments, (ii) a continuous performance documented "across two tapes," or (iii) individual program episodes or movie reels that are cut together into a composite "reel" (file). The multiple segments are strung out as OP1a with (optional) AS_07_Segmentation_DMS (section 6.7.5 and appendix G) to identify segment-start timecode and duration.
- OP1b with segmentation. Like the preceding but with out-of-band data like timed text.

Collection Files

- OP3c. For bundled collections of items, e.g., a set of television advertisements or multiple episodes/reels for which the essences are not carried in a single file. Collection Files will not be included in the AS-07 Baseband Shim.

Comment: We recognize and respect the overlap in terms of function between the AS-07 bundle and other formatting specifications: the Archive eXchange Format (AXF), the Interoperable Master Format (IMF), the Linear Tape File System (LTFS), the BagIt specification, and AMWA MXF specification AS-02.

6.3.2 Baseline Operational Patterns

Encoders shall produce AS-07 files that comply with the MXF Operational Patterns required by a given AS-07 shim. The full set of AS-07 Operational Patterns shall be limited to the following: OP1a (SMPTE ST 378), OP1b (SMPTE ST 391), and OP3c (SMPTE ST 408), and these shall be implemented for AS-07 Item Files and AS-07 Collection Files, as specified in the sections that follow.

Encoders shall also produce AS-07 files that are labeled as OP1a, OP1b, or OP3c in the Operational Pattern property of all Partition packs and the Preface Set.

Decoders shall be capable of reading files with Operational Patterns as described in this and the following subsections.

6.3.3 Operational Patterns -- Item Files

Encoders shall produce AS-07 Item Files with internal essences that comply with MXF Operational Pattern OP1a (SMPTE ST 378) or OP1b (SMPTE ST 391), and are labeled as OP1a or OP1b in the Operational Pattern property of all Partition packs and the Preface Set.

AS-07 Item Files may be segmented as specified in section 6.7.5 (Program Segmentation).

AS-07 Item Files may or may not be required by a given shim.

6.3.4 Operational Patterns -- Collection Files

Encoders shall produce AS-07 Collection Files that reference sets external essences that consist of valid instances of AS-07 Item files. AS-07 Collection Files shall comply with MXF Operational Pattern OP3c (SMPTE ST 408), and are labeled as OP3c in the Operational Pattern property of all Partition packs and the Preface Set.

AS-07 Collection Files (External Essences) may or may not be required by a given shim.

6.3.5 Operational Pattern Labeling

Encoders shall label AS-07 files with the appropriate OP designation in the Operational Pattern property of all Partition packs and the Preface Set. Decoders shall be capable of reading files with the Operational Pattern labeling as described in this section.

6.3.6 Shim Parameter Table for Operational Patterns

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Permitted Operational Patterns	MXF-specific Operational Pattern	operational_pattern_types	Strong	OP1a internal OP1b internal OP3c external

6.4 Timecode

6.4.1 Timecode Categories (informative)

Normative requirements for carriage of Timecode are listed in sections that follow the informative paragraphs. Of particular importance are the requirements for Master Timecode (sections 6.4.4.2, 6.4.4.3 and 6.4.4.4), labeling of Timecodes (section 6.4.3.2) and Historical Source Timecode (sections 6.4.5.2 through 6.4.5.6)

AS-07 Files may contain many types of timecode, taking advantage of the multipart architecture offered by MXF. In addition to SMPTE's MXF standard, the specifications that follow owe much to the previous recommendations offered by EBU R122, *Material Exchange Format: Timecode Implementation*. These EBU recommendations have been extended and revised to support archive and preservation requirements.

The following sections employ two important terms: *Master Timecode* and *Historical Source Timecode*. AS-07 Master Timecode is continuous and is the primary, canonical representation of references into the essence for all timecode-dependent activities; for example, descriptive metadata and playback will refer to this timecode information. Master Timecode is sometimes referred to as Synthetic Timecode.

The term *Historical Source Timecode* has been taken from EBU R 122 and names various forms of legacy timecode, e.g., timecode(s) retained from a videotape being reformatted. AS-07 Historical Source Timecode may take various forms, including but not limited to, LTC, VITC and ATC, and it may be of various frame rates and frame counting modes. Historical Source Timecode may be discontinuous and is not used as the Master Timecode in AS-07 files.

AS-07 Files can contain many timecodes (one Master Timecode, many Historical Source Timecodes). Each timecode is represented by a Timecode Track, and the timecode data can occur simultaneously in several places:

- The Master Timecode can be stored in the Material Package, in the Top Level Source Package and in the System Item of an Essence Container (section 6.4.4)
- A Historical Source Timecode can be stored in the Top Level Source Package, in the System Item of an Essence Container, in the essence on a picture, sound or data Essence Container essence, or in a Lower Level Source Package (section 6.4.5).

All occurrences of a Timecode convey the same timecode values in every place, except that timecode data within essence can contain errors or interruptions, whereas the timecode data in Timecode Tracks and in System Items can be filtered to conceal such errors.

6.4.2 Timecode Sources (informative)

AS-07 files will accommodate the range of timecode types outlined in the following list. Types *a* through *e* in the series are defined in EBU R122; types *f* and *g* have been added to support AS-07. Using AS-07 terminology, timecode types *a*, *b*, and *c* are examples of Historical Source Timecode, types *d* or *e* mark the start value for expressions of AS-07 Master Timecode.

- a. Linear timecode (LTC) according to SMPTE 12M-1-2008. (Example of AS-07 Historical Source Timecode)
- b. Vertical interval timecode (VITC) according to SMPTE 12M-1-2008. (Example of AS-07 Historical Source Timecode)
- c. Ancillary Time Code (ATC) according to SMPTE 12M-2-2008. (Example of AS-07 Historical Source Timecode)
- d. Preset timecode (Example of AS-07 Master Timecode)
- e. Timecode from the application controlling the MXF encoder (e.g. real-time recording device or software encoder). Examples of interfaces for such timecode are the Sony 9 pin protocol, VDCP or other appropriate application programmable interfaces (API). (Example of AS-07 Master Timecode)
- f. One or more of the timecode channels may be clock time (aka "TimeOfDay"); this will most likely include discontinuities (for example, if recording was intentionally paused); and it may include ST 309 Date and Timezone information. (Example of AS-07 Historical Source Timecode)
- g. Other potential timecode types, including Edgecode, Camera Metadata, IRIG, ST309, even "Next Generation Timecode". Note that times in some cases may be obtained from the User Bits of the incoming timecode. (Example of AS-07 Historical Source Timecode)

6.4.3 Labeling Timecode in Header Metadata

6.4.3.1 Labeling Timecode in Header Metadata (informative)

Although optional in a strict sense, the use of descriptors and subdescriptors to characterize timecodes is encouraged for AS-07 users. One important application for AS-07 is as a target format for the reformatting of historical videotapes. Such videotapes often carry multiple timecodes of the types described in the preceding section. These timecodes often have long-term value: they may pertain to pre-existing log sheets or edit decision lists, represent time-of-day information needed for forensic analysis, or provide data that can be used by a researcher to reconstruct the history of a given stretch of video footage. Proper labeling of Historical Source Timecode serves all of these purposes.

In its handling of timecode, AS-07 uses elements from two SMPTE specifications: ST 405 specifies a method to construct timecode arrays in essence container System Items, while ST 385 provides a scheme for descriptors and subdescriptors. These descriptors and subdescriptors are associated with Timecode Tracks. In the case of Timecodes (all types) in essence container System Items, the tracks and descriptors are to be carried in the Top Level Source Package. When Historical Source Timecode Tracks are carried in a Lower Level Source Package, the descriptors will be carried in that location as well. The subdescriptors provide additional properties to identify the essence tracks from which the timecode data was acquired.

Appendix C.1 features an illustrated example of how AS-07 employs Timecode Descriptors and Subdescriptors.

6.4.3.2 Labeling Timecode in Header Metadata (requirements)

AS-07 encoders shall create Timecode Tracks in conformance with the rules of ST 377-1 B.7 for Track IDs and B.15 for Track Numbers.

6.4.3.2.1 Timecode Header Label Descriptor

6.4.3.2.1.1 Timecode Header Label Descriptor (informative)

The DateTimeDescriptor for AS-07 is derived from the one specified by ST 385 table 3. The list of properties of the DateTimeDescriptor, which is derived from ST 385 table 3 and updated to match ST 377-1:2011 is provided in appendix C.3.

Note that a single DateTimeDescriptor can simultaneously describe a Timecode Track, an Essence Timecode, and a SystemItem Timecode, with one DateTimeSubdescriptor for each. The LinkedTrackID property specifies the ID of the Timecode Track that is described; the DateTimeEmbedded flag indicates if the timecode data is also embedded in the essence, at the DateTimeEssenceTrackID and DateTimeChannelID given in that subdescriptor; and the distinguished value 0 together with the DateTimeChannelID describe the instance within the SystemItem.

6.4.3.2.1.2 Timecode Header Label Descriptor requirements

AS-07 Baseband Shim encoders shall provide DateTimeDescriptors that conform to the specification in appendix C.3.

Essence Descriptors of Top Level Source Packages and Lower Level Source Packages should include a DateTimeDescriptor as defined in appendix C.1 for each Timecode Track that shall comply with the following requirements:

- When present, a DateTimeDescriptor shall use the Essence Container UL to identify the Essence Container in which the timecode data is embedded. In the case where the same timecode data is contained in several Essence Containers encoders may specify any one of the Essence Container ULs; it is recommended that encoders use the Essence Container that was encoded most recently. If the timecode data is only in the GC System Item, the EssenceContainerUL shall be 0 (zero). Note that an alternate non-zero UL could be assigned in RP224 by SMPTE in the future.
- When present, a DateTimeDescriptor shall include a SMPTE UL indicating the time code type, as registered in RP 224 (revisions to RP224 forthcoming).
- When present, a DateTimeDescriptor should include one DateTimeSubdescriptor for each instance of the timecode data within the file. For example, when a timecode is stored in the Top level source package of the Header Metadata, the system item and the data track, three subdescriptors shall be present.
- When present, a DateTimeSubdescriptor shall use the DateTimeSymbol property to provide an alphanumeric label for the timecode instance. The symbol shall be the one registered for the timecode type UL in RP224; if the RP224 entry does not contain a symbol, encoders shall provide an alphanumeric symbol of their own choice.
- When present, a DateTimeSubdescriptor shall use the DateTimeEssenceTrackID property to indicate the track ID of of the audio track where the timecode data is stored in a Top Level Source Package. If this optional property is absent, this implies that the timecode data contained in the Timecode Track is Master Timecode and there is no timecode data on essence tracks. If provided, values shall conform to SMPTE ST 377-1:2011 (table B.15): for Master Timecode, the value shall be 1 (one), and for Historical Source Timecode, even if there are multiple instances, the value shall be 0 (zero).
- When present, a DateTimeSubdescriptor shall use the DateTimeChannelID property to indicate the audio channel within the stated EssenceContainer in which the timecode is embedded. DateTimeChannelID assignment shall begin with 0 (zero). This is an optional property; if the property is absent, it is implied that the timecode is in the first channel (DateTimeChannelID=0) in the essence container. The mapping of ordinals to the available channels is defined separately for each EssenceContainer type in section 6.4.3.2.2 below.
- When present, a DateTimeSubdescriptor should include an instance of the free-text DateTimeDescription property that identifies the type and location of the Historical Timecode in the source item.

6.4.3.2.2 Timecode Header Label Subdescriptor

6.4.3.2.2.1 Timecode Header Label Subdescriptor (informative)

The main function for AS-07 Timecode Header Label Subdescriptors is to identify and distinguish timecodes when an Essence Container carries more than one. The Subdescriptor table in appendix C.4 prescribes the

ordinals that will appear in the `DateTimeEssenceTrackID` or `DateTimeChannelID` properties. In addition, the `DateTimeSymbol` property symbolically identifies the timecode type with values specified in SMPTE RP224.

6.4.3.2.2 Timecode Header Label Subdescriptor requirements

AS-07 encoders shall provide values for the Subdescriptors property that strongly references a `TimecodeLabelSubdescriptor` derived from the ST 377-1 annex B.3, and described in detail in appendix C.4 of this document. For ATC (described in SMPTE ST 12-2 and SMPTE ST 12-3), the value shall be `DBB1`.

6.4.4 Master Timecode

6.4.4.1 Master Timecode (informative)

AS-07 Master Timecode is required and will be uninterrupted (often called *continuous*) and ascending. Master Timecode is the primary, canonical representation of references into the essence for all timecode-dependent activities.

The best practice for preservation and long-term archival management is to set the frame rate and the frame count mode to match the actual frame repetition rate and count mode of the picture essence and this is required by this specification. For example, if the frame rate of a given source item is an integer (i.e., non-fractional) 30 fps, then the typical choice of non-drop Master Timecode would increment 30 times per second. In an example with a fractional frame rate, an essence with a sample rate of 30000/1001 (customarily stated as 29.97 fps) would typically employ a drop-frame Master Timecode that increments at 30000/1001 times per second. Many archives prefer to produce files for long-term archiving that carry non-drop Master Timecode and integer frame rates.

6.4.4.2 Master Timecode in Header Metadata Top Level Source Package

Encoders shall encode AS-07 Master Timecode in the Header Metadata Top Level Source Package that contains the Picture, Sound, and Data Essence. This essence is frame-wrapped (or custom-wrapped if so required by a shim).

Encoders shall place uninterrupted, ascending AS-07 Master Timecode as a Timecode Track and shall identify it by setting the track number property to 1. There shall be only one timecode track with a track number property value of 1 in a Package. The Master Timecode `EditRate`, `RoundedTimecodeBase`, and `DropFrame` Properties shall match the frame rate and count mode of the Picture Essence in the file.

When recording, the AS-07 Master Timecode time addresses for each essence container shall be represented in a Timecode Segment with `Start Time` and `Length` on a timecode track in the Top Level Source Package.

The start timecode of the Master Timecode may be set to a fixed number, or to match the `Start time` (i.e., the initial time address) of a historical source timecode. The preference may be specified in a shim.

Various frame rates and drop-frame and non-drop frame counting modes are permitted for the Master Timecode. This range of options may be constrained in a shim.

Encoders shall not place Master Timecode in Top Level Source Packages other than the one that contains the frame-wrapped Picture, Sound, and Data Essence. Note that these other Packages describe Essence or metadata that is clip-wrapped (or custom- wrapped if so required by a shim).

6.4.4.3 Master Timecode in Header Metadata Material Package

AS-07 encoders shall generate a timecode track for each Material Package. This is in addition to the Master Timecode encoded in the Top Level Source Package.

For AS-07 files, the default start timecode of the material package timecode track should be equal to the timecode time address of the source package position that is referenced by the start of the first material package source clip.

Timecode frame rate and mode (drop-frame or non-drop frame) are required properties of a TimecodeSegment.

Various frame rates and drop-frame and non-drop frame counting modes are permitted for the Master Timecode. This range of options may be constrained in a shim.

6.4.4.4 Master Timecode in Essence Container System Items

Encoders shall place AS-07 Master Timecode in the Essence Container as a System Item in the Essence Container. It shall be encoded as the first element of the ST 405 TimecodeArray of the ST 394 System Element. Master Timecode in Essence Containers shall be stored with each frame and not as a start and duration, and shall be frame accurate.

Note that any Timecodes that are present within the Picture, Sound or Data Item are considered to be historical Source Timecodes as discussed in section 6.4.5.5 below.

Encoders shall encode a DateTimeDescriptor (see above). Note that a single DateTimeDescriptor can simultaneously describe both a Timecode Track and a System Item Timecode. The DateTime Embedded Property of the DateTimeDescriptor indicates whether SystemItemTimecode is present for the linked Track.

6.4.5 Historical Source Timecode

6.4.5.1 Historical Source Timecode (informative)

AS-07 Historical Source Timecode is legacy timecode, e.g., from a videotape being reformatted, and it may take various forms, including but not limited to, LTC, VITC and ATC, and it may be of various frame rates and frame counting modes. Historical Source Timecode may be discontinuous and shall not be used as the Master Timecode.

The legacy timecodes in videotapes and other sources may themselves be layered in ways that an archive wishes to track, e.g., a videotape may carry LTC and may additionally carry an earlier generation of timecode recorded, say, as audio track 3. Implementers who wish to document such historical information will employ descriptors and subdescriptors as needed and/or provide documentation in the AS-07 Manifest (section 6.7.1).

6.4.5.2 Encode Various Types of Historical Source Timecode

When present in source material, AS-07 encoders shall encode the following types of Historical Source Timecode:

- a. Linear timecode (LTC) according to SMPTE 12M-1-2008.
- b. Vertical interval timecode (VITC) according to SMPTE 12M-1-2008.
- c. Ancillary Time Code (ATC) according to SMPTE 12M-2-2008.

AS-07 encoders should encode other Historical Source Timecode types when present in source material, e.g., Edgecode, Camera Metadata, IRIG, ST309, even "Next Generation Timecode." Note that times in some cases may be obtained from the User Bits of the incoming timecode. Special requirements may be developed for shims.

6.4.5.3 Historical Source Timecode in Essence Container System Items

When supplied to the encoder, Historical Source Timecode shall be encoded in the second and subsequent elements of the ST405 TimecodeArray of the ST 394 System Element. (Section 6.4.4.4 reserves the first element in TimecodeArray for Master Timecode.) Historical Source Timecode in Essence Containers shall be stored with each frame and not as a start and duration. Encoders shall accommodate discontinuities in incoming Historical Source Timecode in Essence Containers and shall record matching discontinuities within the ST405 TimecodeArray.

Encoders shall encode a DateTimeDescriptor in the corresponding Historical Source Timecode Track of the Top Level Source Package as specified in 6.4.3 above (Labeling Timecode in Header Metadata).

6.4.5.4 Historical Source Timecode Tracks in Header Metadata for TLSP

When Historical Source Timecode tracks are to be placed in Top Level Source Packages, AS-07 encoders shall accommodate discontinuities in incoming Historical Source Timecode. Discontinuous timecode shall be represented as a Sequence of TimecodeComponents (ST 377-1 annex B.16). Continuous timecode shall be represented as a TimecodeComponent with Start Time and Length (ST 377-1 annex B.17). Segments with no timecode or undecodable timecode shall be represented as Filler (ST 377-1 annex B.10).

Encoders should encode a DateTimeDescriptor as specified in 6.4.3 above (Labeling Timecode in Header Metadata).

6.4.5.5 Historical Source Timecodes in Essence Container Picture, Sound, and Data Items

Additional Historical Source Timecodes may also be represented:

- as SMPTE ST 12-2 data in ANC packages in one or more Data Items in the Essence Container.
- as LTC in Sound Items in the Essence Container.
- as VITC in the Picture Items in the Essence Container (such as a VBI line on the picture in D10 video essence, timecode GOP Header in MPEG-2 essence, and so on).

Encoders should encode a DateTimeDescriptor as specified in 6.4.3 above (Labeling Timecode in Header Metadata).

6.4.5.6 Historical Source Timecode in Lower Level Source Packages

6.4.5.6.1 Historical Source Timecode in Lower Level Source Packages (informative)

EBU R 122 (Material Exchange Format Timecode Implementation) foresaw the need to identify and characterize MXF files that contain multiple expressions of Timecode. In section 3 (Recommendations) of this EBU standard, recommendation 2.e specifies an approach that places Historical Source Timecode(s) in timecode tracks of the Lower Level Source Package (LLSP). This approach will also have value for AS-07 files. As specified below, AS-07 shims may mandate, forbid, encourage, or permit this practice. In the initial AS-07 Baseband Shim (appendix J), the use of LLSP for Historical Source Timecode tracks is encouraged.

6.4.5.6.2 Historical Source Timecode in Lower Level Source Packages, Requirement Options for Shims (informative)

Each AS-07 shim will specify its requirements for the carriage of AS-07 Historical Source Timecode tracks in Lower Level Source Packages (LLSP) as follows:

- LLSP Historical Source Timecode tracks are mandated: The Timecodes encoded as the second and subsequent elements of the ST 405 Timecode Array (section 6.4.5.3) shall have a matching LLSP Timecode track.
- LLSP Historical Source Timecode tracks are forbidden: The Timecodes encoded as the second and subsequent elements of the ST 405 Timecode Array (section 6.4.5.3) shall never have a matching LLSP Timecode track.
- LLSP Historical Source Timecode tracks are encouraged: The Timecodes encoded as the second and subsequent elements of the ST 405 Timecode Array (section 6.4.5.3) should have a matching LLSP track, and there may be additional LLSP Timecode tracks for which there is no ST 405 Timecode Array element.
- LLSP Historical Source Timecode tracks are permitted: The Timecodes encoded as the second and subsequent elements of the ST 405 Timecode Array (section 6.4.5.3), and Timecodes for which there is no ST 405 Timecode Array element, may have matching LLSP tracks. Thus there is no required correspondence between the Timecodes encoded as the second and subsequent elements of the ST 405 Timecode Array (section 6.4.5.3) and LLSP Timecode tracks.

6.4.5.6.3 Historical Source Timecode in Lower Level Source Packages, Encoder Requirements

When Historical Source Timecode tracks are to be placed in Lower Level Source Packages, AS-07 encoders shall accommodate discontinuities in incoming Historical Source Timecode. Discontinuous timecode shall be represented as a Sequence of TimecodeComponents (ST 377-1 annex B.16). Continuous timecode shall be

represented as a TimecodeComponent with Start Time and Length (ST 377-1 annex B.17). Segments with no timecode or undecodable timecode shall be represented as Filler (ST 377-1 annex B.10).

Encoders should encode a DateTimeDescriptor as specified in 6.4.3 above (Labeling Timecode in Header Metadata).

6.4.6 Shim Parameter Table for Timecode

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Master Timecode mode	Master Timecode mode requirement	master_timecode_mode	Strong	Drop frame Non-drop-frame Mode not declared
Master Timecode frame rate	Master Timecode frame rate requirement	master_timecode_framerate	Gentle	Any integer or rational numerical value representing the number of frames per second. No requirement
Master Timecode start type	Type of clock start value for Master Timecode	master_timecode_starttype	Gentle	User specified fixed value Start value derived from historical source timecode Any value
User specified fixed value Master Timecode start time	Prescribed start time for fixed-value Master Timecode, e.g., 01:00:00:00	master_timecode_fixed_startvalue	Gentle	Any timecode value expressed as HH:MM:SS:FF No requirement
Historical Source Timecode in LLSP	Carriage of Historical Source Timecode track instances in the LLSP	historical_source_timecode_LLSP	Gentle	Mandated Forbidden Encouraged Permitted

6.4.7 Decoder Behavior with Regard to Timecode

6.4.7.1 Decoder Behavior with Regard to Master Timecode

Decoders shall use the AS-07 Master Timecode as the primary, canonical timecode instance for playback and other references.

In order to assist users in identifying problems in file encoding or decoding, AS-07 decoders may track Master Timecode in both the essence container (section 6.4.4.4) and in Master Timecode Tracks (sections 6.4.4.2 and 6.4.4.3), and provide an indication of any discrepancies.

6.4.7.2 Precedence of Timecode

Decoders should decode both the Master Timecode in the Header Metadata Material Package and the Master Timecode in the Essence Container, and when decoding a frame of essence, decoders should compare the two timecodes that are implied for that frame. In the event of a disagreement between the two implied timecodes, decoders should indicate an error condition and should indicate which timecode is chosen to take precedence.

6.4.7.3 Decoder Behavior with Regard to Historical Source Timecode

When decoding AS-07 files that carry Historical Source Timecode(s) in the SMPTE 12M-1-2008 format, carried in the ST405 TimecodeArray of the ST 394 System Element; Lower Level Source Packages; and/or Essence Container Data Items, decoders shall provide the ability to select and display these timecodes before and during playback, and shall output those instance(s) of timecode data, in the format as encoded, for applications external to the decoder. Note that SMPTE 12M timecodes (LTC, VITC, and ATC) are listed in section 6.4.5.2.

When decoding AS-07 files that carry other (non-SMPTE 12M-1) Historical Source Timecode(s), decoders may provide the ability to select and display these timecodes before and during playback, and shall output those instance(s) of timecode data, in the format as encoded, to applications external to the decoder.

6.5 Header Metadata Parameters and Constraints

6.5.1 Header Metadata

Header Metadata shall be compliant with SMPTE ST 377-1:2011 and with SMPTE ST 378:2004 OP1a; SMPTE ST 391:2004 OP1b; and SMPTE ST 408:2006 OP1c and OP3c.

6.5.2 Shim Parameter Table for Header Metadata

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Program identification	Required identifiers	program_identification	Gentle	One of: UUID UMID UL Other
Master Timecode	Master Timecode track in the Material Package, synthetic and continuous, labeled as Track 1.	master_timecode_track	Strong	Mandated
Historical Source Timecode	One or more Historical Source Timecode tracks, with Descriptors, and assigned the Track Number 0 (zero).	historical_source_timecode_track	Strong	Mandated*
Intimate metadata	Metadata that is intimately associated with the essences and which must be carried with the file including information about the ingest of the source stream	intimate_metadata	Moderate	All of: Program Ident Track Ident Language Code Ingest Provenance Other per shim

* Mandated when Historical Source Timecode is carried in Essence Container System Items or Data Items.

6.5.3 Top-Level Source Packages

6.5.3.1 Top-Level Source Package Quantity (informative)

AS-07 files with internal essences will use operational patterns OP1a or OP1b, where Top-level Source Packages are effectively the same as Top-level File Packages. SMPTE ST 378:2004 constrains OP1a to a single Top-level Source Package. SMPTE ST 391:2004 constrains OP1b files to two or more Top-level Source Packages. In contrast, AS-07 OP3c files are used for collections, where multiple external essences will be referenced, and in accord with SMPTE ST 408:2006, AS-07 OP3c files may carry one or more Top-level Source Packages. See section 6.3 for more information on AS-07 Operational Patterns.

6.5.3.2 Top-Level Source Packages

Encoders shall write AS-07 OP1a files with one Top-level Source Package, OP1b files with two or more Top-level Source Packages, and OP3c files with one or more Top-level Source Packages. Shims may specify a required quantity or quantity range of Top-level Source Packages. Decoders shall read all Top-level Source Packages in an AS-07 file.

6.5.3.3 Shim parameter table for Top-Level Source Packages

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
-----------	-------------	----------------	------------------	--------------

Top-level source package	Quantity of top-level source packages	tlsp_quantity	Strong	Single Multiple
--------------------------	---------------------------------------	---------------	--------	--------------------

6.5.4 Lower-Level Source Packages

If present, Lower-Level Source Packages shall be compliant with SMPTE ST 377-1:2011.

6.5.4.1 Lower-Level Source Packages, Relevant New Standard (informative)

Several topics, including the properties of the Lower Level Source Packages, are addressed in the recent update of SMPTE 2001-2:2014, pertaining to the mapping of registered data in XML form. The additional guidance about Lower Level Source Package properties may include features that will be implemented in future editions of AS-07.

6.5.5 MXF Tracks

Packages in AS-07 files shall contain exactly the number of MXF Tracks required to describe the Video, Audio, Content Integrity, Timecode, Descriptive Metadata, and other Ancillary Tracks contained in the file. Tracks in the Material Package shall be compliant with SMPTE ST 377-1:2011. In addition, Timecode tracks shall be compliant with the rules outlined in section 6.4.

6.5.6 Descriptors

The Descriptors in the File Package (Top Level Source Package) of AS-07 files shall be compliant SMPTE ST 377-1:2011. Descriptors shall include all properties specified by SMPTE ST 377-1:2011 and specific parametric metadata as required by Video, Audio, and Closed Captions Tracks. In addition, descriptors and subdescriptors for Timecode shall be compliant with the rules outlined in section 6.4.

6.5.7 Package Labeling

PackageIDs in AS-07 files shall be in compliance with SMPTE ST 330:2004.

6.6 Descriptive Metadata Parameters and Constraints

6.6.1 AS-07 Descriptive Metadata (informative)

This AS-07 specification defines four Descriptive Metadata Schemes (DMS) that may be included in an AS-07 MXF file. One of the schemes pertains to the whole file (and is required); two define sets of metadata elements for additional (a) non-essence text-based or (b) non-essence binary data that may be embedded in the file; and the fourth provides information about the segmentation of essences. The DM Schemes for embedded text-based or binary data are implementations of a "superclass" DMS, which is also specified in this document. Thus appendixes D through G provide specifications for five DM Schemes: the four that may be included in AS-07 files and the superclass DMS.

Organizations may also include other Descriptive Metadata Schemes, e.g., DMS-1, in AS-07 files.

The expectation is that organizations creating the files will provide the data for the instances of descriptive metadata to AS-07 encoders, either for one file at a time or in batches. Although not part of this specification, organization-provided data will be structured in the form of CSV tables, XML documents, etc. Encoders will be expected to receive this data and embed it according to the requirements below.

6.6.1.1 AS-07 Core Descriptive Metadata Scheme (informative)

AS-07 Core Descriptive Metadata Scheme (AS_07_Core_DMS) is required for all AS-07 files. In a mix of optional and mandatory elements, AS_07_Core_DMS provides one or more identifiers for the file and its content, a high level description of the file's content (e.g., title or working title), identifies who is responsible for the file (the "keeper" in terms of long-term management), provides basic video characteristic information, identifies if captions are present, defines audio track allocations, and offers high level information about how the file was made (e.g., "reformatted from videotape"). This scheme is not repeatable within the file.

AS_07_Core_DMS is relatively simple by design, offering less information than found in, say, an AS-11 Core-DMS track. The optional Supplementary Metadata entities in an AS-07 file—which are user developed and vary from organization to organization—provide creating organizations with an opportunity to offer more detailed metadata, e.g., complete cataloging information, detailed information about the reformatting or production process, other administrative and technical metadata, etc. Although AS-07 has no required schemas or other structures for Supplementary Metadata, specifications for its carriage as text-based streams in Generic Stream Partitions (SMPTE ST 410-2008) are provided in section 6.2.4.

Meanwhile, specific parametric information required by Video, Audio and Closed Caption tracks is stored in Picture, Sound and Generic Descriptors as described in SMPTE ST 377-1:2001; see section 6.4.7.

6.6.1.1.1 AS-07 Core DMS Device Objects (informative)

AS_07_Core_DMS_Devices Object defines the unordered set of references for use in AS_07_Core_DMS that describe the device(s) used to capture or create the content. This optional and repeatable object set defines the device type (such as “camera”), manufacturer, model, serial number and usage description.

6.6.1.2 AS-07 DMS Identifier Objects (informative)

AS_07_Core_DMS_Identifiers Objects defines the unordered set of references that describe file- and part-identifiers in an AS-07 file. This set of references may be used in AS_07_Core_DMS and also in other AS-07 DMSes. Many organizations employ multiple identifiers for items (or parts of items) in their collections, some of which are local (e.g., shelf number for a physical item), and AS_07_Core_DMS_Identifiers Objects are intended to permit embedding these multiple identifiers in AS-07 DMSes, and to distinguish them in terms of type and by optional comments. The list of elements includes identifier value, role (Main, Additional or GSP), type (such as UUID, UMID, UL, Other), and a free text comment field. At least one AS_07_DMS_Identifier set is required in AS_07_Core_DMS with the IdentifierRole = Main. Beyond the main identifier, additional AS_07_Core_DMS_Identifiers sets are optional; there can be as many IdentifierRole = Additional identifiers as an organization requires.

6.6.1.3 AS-07 Generic Stream Partition Superclass Descriptive Metadata Scheme (informative)

The AS-07 Generic Stream Partition Descriptive Metadata Scheme (AS_07_GSP_DMS) defines the required superclass metadata scheme for non-essence binary and text-based data stored in Generic Stream Partitions in AS-07 files (see section 6.2.4). AS_07_GSP_DMS will provide a high level description of the GSP data payload including identifiers, data description, a free text comment field and MIME type.

The AS_07_GSP_DMS is a subclass of the SMPTE RP 2057:2011 generic text-based DMS and as such, requires the use of a MIME type for text-based data to characterize the text-based entity carried in the Generic Stream Partition. In addition to carriage in the SMPTE RP 2057:2011 generic text-based DMS, MIME types for text-based data are repeated in the AS_07_GSP_DMS_MIMEMediaType in order to be referenced by the MimeType element in the Manifest. For consistency, AS-07 requires MIME types for binary object to be applied in the same manner as RP 2057’s requirement for text-based objects. Since some binary objects may not have MIME types, AS-07 accepts the value of a zero-length string.

In the library and archive world, MIME types have been registered for some widely used cataloging record types. For example, IETF’s RFC 6207 documents two library community examples: MODS (Metadata Object Description Schema) is application/mods+xml, while the MARC21 XML Schema is application/marcxml+xml. Other valuable metadata types, however, do not have registered MIME types. Examples include PBCore (the U.S. Public Broadcasting Metadata Dictionary, which has an XML schema) and the process-logging metadata produced by the Front Porch SAMMA device. Typically, complex non-registered entities like these would be assigned the generic MIME application/xml. Meanwhile, IETF’s RFC 3023 suggests that XML data that is “readable by casual users” be assigned the generic MIME text/xml.

6.6.1.3.1 AS-07 Generic Stream Partition Binary Data Descriptive Metadata Framework (informative)

AS-07 Generic Stream Partition Descriptive Metadata Framework (AS_07_GSP_BD_DMS) is required for each non-essence binary data stream (see 6.2.4) in AS-07 Generic Stream Partitions (SMPTE ST 410-2008). Generic Stream Partitions that consist of essence binary data, including EBU STL, do not require a DMS but rather are described by appropriate Descriptors as detailed in 6.2.12.

In this edition of the AS-07 specification, this scheme is identical to the superclass described in section 6.6.1.3 above, but it could be extended in the future.

6.6.1.3.2 AS-07 Generic Stream Partition Text-based Data Descriptive Metadata Framework (informative)

AS-07 Generic Stream Partition Text-based Data Descriptive Metadata Framework (AS_07_GSP_TD_DMS) is required for each non-essence text-based data streams (see 6.2.4) in AS-07 Generic Stream Partitions (SMPTE ST 410-2008 and see section 6.2.4) including Supplementary Metadata and the AS-07 Manifest (section 6.2.4.1.4). Essence text-based data including EBU or SMPTE Timed Text not require a DMS but rather are described by appropriate Descriptors as detailed in 6.2.12.

AS_07_GSP_TD_DMS augments the data in AS_07_GSP_DMS to include the use of RFC 5646 language codes for the text as outlined in in the Descriptive Metadata Scheme and Sets for Text-Based Metadata described in SMPTE RP 2057-2011 (Text-Based Metadata Carriage in MXF).

6.6.1.4 AS-07 Segmentation Descriptive Metadata Scheme (informative)

AS-07 Segmentation Descriptive Metadata Scheme (AS_07_Segmentation_DMS) is required for all AS-07 files that implement essence Segmentation (see section 6.7.5). AS_07_Segmentation_DMS will provide a description of both the individual segmented parts as well as the aggregate group of parts. Since AS-07 files with internal essences are limited to Operational Patterns OP1a and OP1b, AS_07_Segmentation_DMS will not repeat in a file.

6.6.1.4.1 AS-07 Segmentation Descriptive Metadata Scheme – Parts Object (informative)

AS-07 Segmentation Descriptive Metadata Scheme – Parts Object (AS_07_Segmentation_DMS_PartsObjects) defines the unordered set of references which describe the parts within a program. This optional and repeatable set includes the part number and total number of parts, i.e. "1 of 3", "2 of 3", "3 of 3."

6.6.2 AS-07 Descriptive Metadata Schemes Encoder Requirements

AS-07 encoders shall create instances of Descriptive Metadata Schemes in compliance with SMPTE ST 377:2011 and EG 42:2004. Each metadata scheme used in the file shall be identified by the use of a DM Scheme label contained in the MXF Preface Set by the DMSchemes property.

The detailed metadata dictionaries and scheme labels for the AS-07 schemes are defined and labeled in the appendixes as listed below:

Data dictionary	Scheme label	Comment	Appendix
AS-07 Core Descriptive Metadata Scheme	AS_07_Core_DMS		D.1
AS-07 Core DMS Device Objects	n/a	Used by AS_07_Core_DMS	D.2
AS-07 DMS Identifier Objects	n/a	Used by AS_07_Core_DMS and other DM schemes	E
AS-07 Generic Stream Partition DMS Superclass	AS_07_GSP_DMS	Used by AS_07_GSP_BD_DMS and AS_07_GSP_TD_DMS	F.1
AS-07 Generic Stream Partition Binary Data Descriptive Metadata Framework	AS_07_GSP_BD_DMS		F.2
AS-07 Generic Stream Partition Text-based Data Descriptive Metadata Framework	AS_07_GSP_TD_DMS		F.3
AS-07 Segmentation Descriptive Metadata Scheme	AS_07_Segmentation_DMS		G.1

AS-07 Segmentation DMS - Parts Objects	n/a	Used by AS_07_Segmentation_DMS	G.2
--	-----	-----------------------------------	-----

AS-07 files may contain other Descriptive Metadata Schemes unless forbidden by a specific shim.

An AS-07 Metadata Scheme Definition shall fully specify the following: 1) the DM Scheme Label that identifies the scheme, 2) the schemes specialized DM Framework, 3) the individual metadata items contained by the scheme's specialized DM Framework.

All keys used to identify AS-07 DM Scheme labels, their associated specialized DM Framework, and individual metadata items, shall be SMPTE ST 298:2008 Universal Labels and shall be published in the SMPTE metadata registry (<http://www.smpite-ra.org>).

6.6.2.1 AS-07 Descriptive Metadata Track Encoder Requirements

AS-07 encoders shall construct Descriptive Metadata Tracks in accordance with the recommendations of SMPTE ST 377:2011 and SMPTE EG 42:2004 as well as SMPTE RP 2057:2011 for text-based metadata only.

AS-07 encoders shall carry the MIME types for text-based data in SMPTE RP 2057:2011 generic text-based DMS and shall repeat the value in the AS_07_GSP_DMS_MIMEMediaType in order to be referenced by the MimeType element in the Manifest.

An AS-07 file shall contain one AS-07 Core Descriptive Metadata track. An AS-07 file shall contain zero or more AS-07 GSP Binary Data Descriptive Metadata Tracks and/or AS-07 GSP Text-based Data Descriptive Metadata Tracks. An AS-07 file shall contain zero or one AS-07 Segmentation Descriptive Metadata Tracks. AS-07 files may contain other Descriptive Metadata Tracks unless forbidden by a specific shim.

AS-07 encoders shall produce files in which each DMS has an associated specialized DM Framework contained by a dedicated Descriptive Metadata Track of the MXF Material Package that indicates which specific AS-07 shim (constraint set) applies to the file.

6.6.2.2 AS-07 Descriptive Metadata Track Decoder Requirements

AS-07 decoders shall be capable of identifying and reading all DM tracks specified in section 6.5.3, and providing a display or other readable output for AS_07_Core_DMS, AS_07_GSP_DMS, and AS_07_GSP_TD_DMS.

AS-07 decoders shall be capable of providing usable output for AS_07_Segmentation_DMS in order to manage the playback of segmented content.

6.6.3 Shim Parameter Table for Descriptive Metadata Schemes

Dimension	Description	Shim parameters	AS-07 Constraint	AS-07 Values
AS_07_GSP_BD_DMS non-essence binary data	Requirement to carry AS_07_GSP_BD_DMS for non-essence binary data in Generic Stream Partitions	AS_07_GSP_BD_DMS	Strong	Permitted*
AS_07_GSP_TD_DMS non-essence text-based data	Requirement to carry AS_07_GSP_TD_DMS for non-essence text-based data in Generic Stream Partitions	AS_07_GSP_TD_DMS	Strong	Permitted**
AS_07_Segmentation_DMS segmentation data	Requirement to carry AS_07_GSP_Segmentation_DMS for segmented essences	AS_07_Segmentation_DMS	Strong	Permitted***
Additional Descriptive Schemes	Carriage of additional descriptive metadata schemes, e.g., DMS-1	additional_DMS	Gentle	Mandated, Forbidden, Encouraged, Permitted

* Mandated when non-essence binary data is carried in a Generic Stream Partition, otherwise permitted.

** Mandated when non-essence text-based data is carried in a Generic Stream Partition, otherwise permitted.

*** Mandated when segmented essences are carried in an AS-07 file, otherwise permitted.

6.6.4 Redundant Metadata

Custom metadata included in an AS-07 file by a shim should not duplicate metadata elements that are already carried in MXF Structural Metadata or are already part of the AS-07 Core Metadata Scheme. In the event of disagreement between redundant and/or duplicate metadata items present in an AS-07 MXF file, decoders should accord the highest priority to MXF Structural Metadata and AS-07 Core Descriptive Metadata Scheme, and lowest priority to the redundant shim-specified metadata.

6.6.5 KLV Fill

To provide for the addition of metadata to existing AS-07 MXF files, implementations should include a KLV Fill of at least 8 kilobytes in length following the metadata in the header partition.

6.6.6 Static Descriptive Metadata Requirements

AS-07 files shall conform to the Descriptive Metadata Track structure described by SMPTE EG 42:2004. AS-07 Descriptive Metadata Tracks shall use the following subset of the MXF structure described in SMPTE EG 42:2004:

- A Static Track contained by the single Material Package in the AS-07 MXF file.
- A Sequence object contained by the Static Track.
- A single DM Segment object contained by the Sequence.
- A DM Framework instance contained by the DM Segment. The DM Framework instance type must map to one of the schemes defined in Preface:DMSchemes.

6.7 Other Parameters and Constraints

6.7.1 Manifest

6.7.1.1 *Manifest (informative)*

The Manifest is a form of non-essence text-based data to be carried in a Generic Stream Partition in an AS-07 file. See 6.2.4 for more information on non-essence data in GSPs.

The AS-07 Manifest supports preservation and good housekeeping by offering an inventory of the AS-07 file's parts and expresses the relationships between them. Through a mix of required and optional elements, it provides a high level inventory of the parts including their identifiers, data description, MIME type, size and location. This information can help the user to better understand the composition of the file and it will also provide machine-interpretable information for content processing if, for example, an AS-07-aware application used values in the DataDescription element to quickly locate the correct QC file in a workflow or to delete embedded graphics (binary data) prior to distribution.

6.7.1.2 *Manifest Structure*

The top-level element in the Manifest shall be designated Manifest. See 6.7.1.5 for file naming information and appendix H for the formal element definition in the XML schema declaration.

6.7.1.2.1 File identifier

6.7.1.2.1.1 *File identifier element*

For overall management of the asset, the required file identifier (FileID) element shall uniquely identify the AS-07 file. Each unique AS-07 file shall have a universally distinct and persistent file identifier.

This element shall contain the same value as the AS_07_Core_DMS_Identifier value where AS_07_DMS_IdentifierRole = Main in the AS_07_Core_DMS (see section 6.6 and appendix D). See section 6.7.1.4 for Manifest Encoder Requirements.

6.7.1.2.1.2 *File identifier type attribute*

The required file identifier type (FileIDType) attribute shall represent the type of unique identifier present in the FileID element.

This element shall contain the controlled vocabulary value for the AS_07_DMS_IdentifierType element where the AS_07_DMS_IdentifierRole = Main in the AS_07_Core_DMS. The controlled vocabulary for AS_07_DMS_IdentifierType is listed in AS_07_DMS_Identifier Objects (see section 6.6 and appendix E). See section 6.7.1.4 for Manifest Encoder Requirements.

6.7.1.2.2 Responsible Organization Name

The required responsible organization name (ResponsibleOrgName) element shall be a free-form, human-readable annotation describing the main name for the entity responsible for the creation, maintenance, preservation of this digital item.

This element contains the same value as the AS_07_Core_DMS_ResponsibleOrganizationName from the AS_07_Core_DMS (see section 6.6 and appendix D). See section 6.7.1.4 for Manifest Encoder Requirements.

Note: The responsible organization name property is intended only for display as guidance to a user.

6.7.1.2.3 Creation date element

The required creation date (CreationDate) element shall be set to the time and date at which the file was created.

The creation date shall be encoded as xs:dateTime type.

6.7.1.2.4 Annotation text element (optional)

The annotation text (AnnotationText) element may be present and shall be a list of zero or more free-form, human-readable annotations describing the file. This element may be used to give additional information about the file.

Note: The annotation text element is intended only for display as guidance to a user.

6.7.1.2.5 Part list element

The part list (PartList) element shall contain the list of Part elements that describe each of the parts contained in the AS-07 MXF file including essences and Generic Stream Partitions (see section 6.2.4). The structure of the Part element is described in section 6.7.1.3. The order of Part elements in the list shall not be significant.

6.7.1.3 Part Element

A part (Part) element shall represent any part or file that exists in the AS-07 file such as an essence track or Generic Stream Partition contents (see 6.2), etc. Each part shall be described by a part element. See the XML schema declaration in section 6.7.1.5 and appendix H for a normative definition.

The Manifest shall not include a part element entry for the Manifest itself.

6.7.1.3.1 Part identifier

6.7.1.3.1.1 Part identifier element (informative)

Internally generated unique identifiers for part objects, like SIDs, are not persistent because they are intended to be assigned at will by the encoder and may change. Universally unique identifiers, on the other hand, will remain constant over time. Parts may have more than one unique identifier but one must be universally unique.

6.7.1.3.1.2 Part identifier element

The required part identifier (PartID) element shall represent the universally unique and persistent identifier associated with the described part object.

When the PartID element describes an object in a Generic Stream Partition (see section 6.2.4), the PartID element shall contain the same value as AS_07_GSP_DMS_Identifier from AS_07_GSP_DMS (see appendix F.1).

If the part contains no universally unique identifier, then the creator of the Manifest file shall generate one. See section 6.7.1.4 for Manifest Encoder Requirements.

6.7.1.3.1.3 Part identifier type attribute

The required part identifier type (PartIDType) attribute shall represent the type of unique identifier present in the PartID element.

This element shall contain the same values as the AS_07_DMS_IdentifierType. The controlled vocabulary for AS_07_DMS_IdentifierType is listed in AS_07_DMS_Identifier Objects (see section 6.6 and appendix E). See section 6.7.1.4 for Manifest Encoder Requirements.

6.7.1.3.2 Data description element

The required data description (DataDescription) element shall be used to describe the role of the part within the AS-07 file. The value of the element shall be used both for display as guidance for the user and as machine-interpretable information for content processing.

When the data description (DataDescription) element describes an object in a Generic Stream Partition (see section 6.2.4), the data description element shall contain the same value as AS_07_GSP_DMS_DataDescription. See section 6.7.1.4 Manifest Encoder Requirements.

6.7.1.3.3 MIME media type

The MIME media type (MimeType) element is used to describe the data type of the part object. When the MIME media type (MimeType) describes an object in a Generic Stream Partition (see section 6.2.4), the MIME media type element shall contain the same value as AS_07_GSP_DMS_MIMEMediaType.

IANA MIME type shall be used if one has been established. If no IANA MIME type has been established, implementers shall register a new MIME type with IANA (<http://www.iana.org/form/media-types>), following procedures also described in RFC 6838) and use that MIME type, or use a zero-length string as the value.

6.7.1.3.4 Size element

The required size (Size) element contains the size of the part in bytes. This size shall be expressed as an integer number of bytes, encoded as type xs:positiveInteger.

6.7.1.3.5 Location element (optional)

The location (Location) element contains the relative URI of the part, relative to the root of the file.

6.7.1.3.6 Part annotation text element (optional)

Part annotation text (PartAnnotationText) elements may be present and shall be a list of zero or more free-form, human-readable annotations describing the file. This element may be used to give additional information about the part.

Note: Annotation text elements are intended only for display as guidance to a user.

6.7.1.4 Manifest Encoder Requirements

6.7.1.4.1 General Manifest Requirements

AS-07 encoders may create an AS-07 Manifest and embed it in the file as specified in the following subsections. The inclusion of a Manifest may be mandated, forbidden, encouraged, or permitted by a shim.

Encoders shall wrap the Manifest according to SMPTE RP 2057:2012 and carry it as a form of non-essence textual data in a Generic Stream Partition as specified in section 6.2.4.1.4 The Manifest shall conform to the formal element definition in the XML schema declaration as specified in appendix H. The Manifest shall require an instance of AS-07_TD_GSP_DMS as described in 6.6.1.3.

6.7.1.4.2 Detailed Manifest Requirements

The following requirements apply when an AS-07 encoder embeds a Manifest in an AS-07 file.

Encoders shall identify and extract the value from the AS_07_Core_DMS_Identifiers value where AS_07_DMS_IdentifierRole = Main in the AS_07_Core_DMS (see section 6.6) and insert the value into the FileID element in the Manifest.

Encoders shall identify and extract the controlled vocabulary value for the AS_07_DMS_IdentifierType element where the AS_07_DMS_IdentifierRole = Main in the AS_07_Core_DMS and insert the value into the FileIDType element in the Manifest.

Encoders shall identify and extract the value from the AS_07_Core_DMS_ResponsibleOrganizationName from the AS_07_Core_DMS (see section 6.6) and insert the value into the ResponsibleOrgName element in the Manifest.

Encoders shall identify and extract the universally unique identifier for each part object and insert the value in the PartID element in the Manifest. Encoders shall generate a universally unique identifier if one is not already assigned to each part object. For the purposes of the Manifest, a UUID encoded as a URN according to IETF RFC 4122 shall be sufficient although application domains may require more stringent identifier implementations.

When the data description (DataDescription) element describes an object in a Generic Stream Partition (see section 6.5), encoders shall identify and extract the value from the AS_07_GSP_DMS_DataDescription from the Generic Stream Partition Data Descriptive Metadata Scheme (see section 6.6) and insert the value into the DataDescription element in the Manifest.

Encoders shall assign the correct DataDescription element value if a new part object is added to the file. When an application modifies parts or transcodes files, encoders shall persist those DataDescription element values in the new Manifest.

Encoders shall identify and extract the value from the AS_07_GSP_DMS_MIMEMediaType and insert the value into the MimeType element in the Manifest.

6.7.1.5 *Manifest Decoder Requirements*

If decoders extract the Manifest as a separate file, it shall be named manifest.xml.

6.7.1.6 *Manifest XML Schema*

When a Manifest is required by a shim, AS-07 encoders shall encode the AS-07 Manifest as XML (W3C XML 1.0), conforming to the XML schema defined in appendix H.

6.7.1.7 *Shim Parameter Table for the Manifest*

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Manifest	Indicates the requirement for the AS-07 Manifest.	manifest	Strong	Mandated, Forbidden, Encouraged, Permitted

6.7.2 *Content Integrity*

6.7.2.1 *Content Integrity Objective and Relevant Standards (informative)*

Content in AS-07 files will often be destined for long term archiving-and-preservation management. This objective is supported by a number of actions, including the creation of fixity or hash values and the monitoring of those values for change over time. In other MXF Application Specifications, this objective is called *media integrity* (sometimes abbreviated as *MI*).

For digital library specialists, content or media integrity usually turns on whole-file fixity values, critical for a well-run asset management system. But whole-file fixity data cannot be embedded in the file itself: that action would change the file, making the hash value "next time" different, thus invalidating it for comparison and monitoring. Whole-file checksums are a critical part of storage and repository systems but have no place in a

file-wrapper specification. For file wrappers, a good fit is provided by specifying a carriage location for hash values on segments of the file, e.g., on a frame or some other small unit of video.

AS-07 calls for the embedding of fixity data on the *V* or *value* data in the KLV triplets that represent frame-wrapped essences. Similar approaches are used in other standards and specifications and, writing informally, this is often referred to as *frame-level* or *edit-unit-level fixity*; the latter term is defined in SMPTE ST 377-1:2011. It is worth noting that frame-level hash values (often referred to as *checksums* or *Cyclic Redundancy Checks, CRCs*) are sometimes employed for use cases such as monitoring production. For example, some specialists use FFmpeg's *framecrc* and *framemd5* to produce checksums on a more granular, per-frame level, making it more feasible to assess the extent or location of digital change in the event of a checksum mismatch.

AS-07 files will generally be frame-wrapped, with the exception of files that carry long-GOP D-10 essences. For D-10, content integrity systems native to long-GOP are to be retained in AS-07 files.

Frame-wrapped picture may be progressive-scanned or interlaced. Picture data for progressive-scanned content will be represented as the *V* in a KLV triplet, and the calculation of fixity is straightforward. Picture data for interlaced video will very often be carried with the data from both fields represented as a single *V* in a KLV triplet. This is the case for uncompressed video mapped according to SMPTE ST 384 and ST 377-1 (annex G.2.25), and also for JPEG 2000 compressed video *case I2* (frame wrapping, interlaced two fields per KLV triplet) mapped according to SMPTE ST 422:2014.

The exception to the general rule outlined in the preceding paragraph is the JPEG 2000 interlaced picture wrapping identified as *case I1* in SMPTE ST 422:2014, where each field is wrapped as a separate KLV triplet. In this case, AS-07 requires that the concatenated *V* values for pairs of KLV triplets be hashed as one. AS-07 uses this approach so that the integrity data for interlaced video is always at the frame (edit unit) level. The same hash value would be calculated as from *case I2*, and this outcome supports integrity monitoring if an essence is re-wrapped from *I1* to *I2* or vice versa.

The AS-07 approach borrows from two important precedents: (1) SMPTE ST 429-6:2006 (D-Cinema Packaging -- MXF Track File Essence Encryption) and (2) the BBC Archive Preservation File Format described in section 5 in the BBC White Paper 233: <http://downloads.bbc.co.uk/rd/pubs/whp/whp-pdf-files/WHP233.pdf>.

From SMPTE ST 429-6:2006, AS-07 re-uses the equivalent of a DMS (Descriptive Metadata Scheme) system for fixity data. In the digital cinema context represented by this standard, fixity data is conjoined with data pertaining to the encryption of the triplet.

Although the use of encryption will be very rare in AS-07 files, in order to allow for this rare use and also to remain consistent with ST 429-6:2006, AS-07 files use that standard's terminology: *Cryptographic Context Set* (like a DM Scheme), *Cryptographic Framework* (like a DM Framework), and *Cryptographic Framework DM Tracks*. The Cryptographic Context Set implemented in AS-07 includes three adaptations from the ST 429-6:2006 implementation: (1) the addition of the optional MICCarriage item, (2) specifying the permitted Null value as the default value for the CipherAlgorithm item and (3) specifying 0 (zero) as the default value for the CryptographicKeyID item.

When content integrity data is created for an AS-07 file, however, the specification does not require the Encrypted Triplet Variable Length Pack specified by ST 429-6:2006 to carry the hash values. Instead AS-07 employs the System Item in the Generic Container, like the BBC and as specified below.

In some instances, incoming content will include Encrypted Triplet Variable Length Pack data, either because it pre-exists as it may for digital cinema content or because a specialized application creates and presents it to the AS-07 production system. This will typically be a circumstance in which content wrapped in non-AS-07 MXF is intended for re-wrapping as AS-07. As noted in section 6.7.2.7, in this case, AS-07 production systems are to retain the Encrypted Triplet Variable Length Pack data in the re-wrapped file, and decoders are to output the Encrypted Triplet Variable Length Pack data (if present) to applications external to the decoder.

It is also the case that ST 429-6:2006 specifies the SHA-1 algorithm for integrity. For the AS-07 preservation use case, this specification calls for the more easily created Castagnoli CRC-32C. The Encrypted Triplet Variable Length Pack from ST 429-6:2006 also carries an element called Sequence Number, defined as "Sequence number of this Triplet within the Track File." In AS-07, the required carriage of the Master Timecode in a System Item (see section 6.4.4.4) provides a one-up set of numbers that can be consulted to the same effect. To allow decoders to differentiate between AS-07 use of System Items and ST429-6:2006 Encrypted Triplets, AS-07 defines an optional item MICCarriage in the Cryptographic Context Set in which a SystemItem value indicates the AS-07 usage and whose absence indicates use of Encrypted Triplets.

The BBC Archive Preservation File Format provides AS-07 with the structure that carries the fixity data itself, as specified in BBC White Paper 233, which refers to the approach as a frame-level checksum. There is one small variation: BBC calls for the use of the PNG CRC-32 Cyclic Redundancy Code algorithm; instead, we specify Castagnoli CRC-32C.

It is beyond the scope of a wrapper specification to specify when in an organization's workflow the initial MIC hash value should be calculated. It is worth noting, however, that many experts counsel that hash creation should occur at the moment of initial encoding, a possibility enhanced by the selection of the Castagnoli CRC-32C hash, which is easy and fast to calculate. Generating the initial hash at the time of encoding means that a sophisticated file-creation system can use this data to verify that the file has been correctly written to media the first time file-writing occurs, thereby supporting quality control at an early stage in the life cycle.

6.7.2.2 CRC-32C Values per KLV Essence Triplets

When required by a shim, AS-07 encoders shall calculate a Castagnoli CRC-32C Cyclic Redundancy Code (IETF RFC 3385) value for every V or value data unit in the KLV triplets that represent frame-wrapped essences, with the exception of interlaced JPEG 2000 that is wrapped according the case I1 specified in SMPTE ST 422:2014, the case in which each field is wrapped as a separate KLV triplet. In the latter case, when integrity data is required by a shim, AS07 encoders shall calculate the Castagnoli CRC-32C for the concatenated values of the two Vs in the pair of KLVs.

For non-frame-wrapped D-10 essences, AS-07 encoders shall retain the integrity elements that are native to that essence.

6.7.2.3 Content integrity Values Carried in Arrays in Essence Container System Items (informative)

The structure of data arrays of the type described here, and in the section devoted to Timecode (6.4), are governed by the batch syntax for KLV values specified in ST 2003:2012. For AS-07, the TimecodeArray is a single property whose value is an array, with the first element MasterTC, and with second and subsequent elements representing other Historical Source Timecodes. The integrity data is represented in a HashArray with a single property whose value is an array, with the first element EssenceTrack Hash, and with second and subsequent Hashes for other EssenceTracks. Generally speaking the first EssenceTrack is picture and the second and subsequent elements are sound, as in the BBC illustrative example below. However, the actual identifiers for these essence tracks are contained in the structural metadata for the FilePackage, and also in the Descriptors contained in or strongly referenced by the FilePackage.

In the illustrative example that follows, the system item bytes for Timecode are a value equal to 09:58:10:12, and the hash values for video and four audio elements are bytes shown in hexadecimal notation with the start of each array item highlighted in bold text:

ITEM	ILLUSTRATIVE VALUE	COMMENT
Key	06.0e.2b.34.02.53.01.01.0d.01.03.01.14.02.01.00	
Len	83.00.00.3c	

Timecode array	01.02	
Local len	00.18	
Array len	00.00.00.02	
Array element len	00.00.00.08	
MasterTC	12.10.58.09.00.00.00.00	Value is actual bytes that represent a Timecode (in this case 09:58:10:12).
VITC element	12.10.58.09.00.00.00.00	Value is actual bytes that represent a Timecode.
LTC element	12.10.58.09.00.00.00.00	Value is actual bytes that represent a Timecode.
Hash array	ff.ff	
Local len	00.1c	
Array len	00.00.00.05	
Array element len	00.00.00.04	
EssenceTrack Hash	8b.cf.fa.3c	First hash is typically picture
EssenceTrack Hash	89.45.12.55	Second hash typically audio 1
EssenceTrack Hash	6f.89.01.06	Third hash typically audio 2
EssenceTrack Hash	32.cc.10.9a	Fourth hash typically audio 3
EssenceTrack Hash	32.cc.10.9a	Fifth hash typically audio 4

6.7.2.4 Content Integrity Array in Essence Container System Items

The CRC-32C values shall be stored in essence System Items as arrays that comply with SMPTE ST 2003:2012.

6.7.2.5 Encryption data (informative)

This version of the AS-07 specification does not offer specifications pertaining to encryption, reserving this topic for a future version. The approach to be adopted is anticipated to follow the guidance provided by SMPTE ST 429-6:2006 and will take into account additional or refined guidance that may result from the development of the Interoperable Master Format (IMF).

6.7.2.6 Cryptographic Context Set, Cryptographic Framework, and Cryptographic Framework DM Tracks.

When CRC-32C hash values are created for frame-wrapped essences, AS-07 encoders shall also create and populate Cryptographic Context Set, Cryptographic Framework, and Cryptographic Framework DM Tracks as specified in SMPTE ST 429-6:2006, with the optional item MICCarriage in the Cryptographic Context Set in which a SystemItem value indicates the AS-07 usage and whose absence indicates use of Encrypted Triplets. Detailed information and requirements on this interrelated set of metadata elements is provided in appendix I.

6.7.2.7 Retention of Encrypted Triplet Variable Length Pack Data

When the input to an AS-07 production system includes integrity and/or encryption data as specified in SMPTE ST 429-6:2006, from an MXF source file that includes an Encrypted Triplet Variable Length Pack or from a specialized system that provides equivalent data in that format, AS-07 encoders shall retain this data in the AS-07 file.

6.7.2.8 Decoder Requirements

AS-07 decoders shall provide the ability to output the CRC-32C data to applications external to the decoder.

Decoders shall provide the ability to select and display the metadata in the Cryptographic Context Set, Cryptographic Framework, and Cryptographic Framework DM Tracks before and during playback, but shall not depend on the presence of this data for the handoff of the CRC data.

This capability shall extend to CRC-32 data in non-Castagnoli formats, thus permitting AS-07 decoders to support "legacy" BBC archive files, which do not have Cryptographic Context Set, Cryptographic Framework, and Cryptographic Framework DM Tracks.

AS-07 decoders shall provide the ability to output the Encrypted Triplet Variable Length Pack data to applications external to the decoder, thus permitting AS-07 decoders to support files that employ the integrity and encryption structure specified in SMPTE ST 429-6:2006.

6.7.2.9 Shim Parameter Table for Content Integrity

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Content integrity	Content integrity data required	content_integrity	Strong	Mandated, Forbidden, Encouraged, Permitted
MIC algorithm	Type of integrity algorithm supported by decoders	mic_algorithm_decoder	Strong	CRC-32C CRC-32 MD5 SHA-1 SHA-256 SHA-512
MIC carriage	MIC carriage location in file	mic_carriage	Strong	SystemItem Encrypted Triplet Variable Length Pack

6.7.3 File Names

6.7.3.1 File Names

The general provisions of the AS-07 specification do not constrain the choice of filenames. Individual shims may constrain file names.

6.7.3.2 Shim Parameter Table for File Names

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
File names	File name restrictions	filenames	Gentle	No constraint [Filename pattern as described in shim specification]

6.7.4 Directory Structure (informative)

The general provisions of the AS-07 specification do not constrain the choice of directory names or structures for storage of AS-07 files.

6.7.5 Program Segmentation

6.7.5.1 Program Segmentation (informative)

Program Segmentation refers to the presence of regions in the program's Essence data that represent parts of a larger whole (e.g., episodes in a series) or points where the program content may be broken (interrupted) in playback. Segmentation may be useful to archives, e.g., if a content asset is a complete movie, a DMS Segmentation track would indicate where the reels start and stop; if the content is episodes of television series, a DMS Segmentation track would indicate where the episodes start and stop. Another example is the film strip genre, where the timing and linkage to the sound track could be described as DMS Segmentation. This type of segmentation is used in AS-11 broadcast files to indicate when non-program content like advertising may be inserted at broadcast time.

6.7.5.2 Program Segmentation Requirements

6.7.5.2.1 Segmentation Track

6.7.5.2.1.1 Segmentation Track General Requirement

Program segmentation is optional in AS-07 files unless required or forbidden by a shim.

6.7.5.2.1.2 Segmentation Track Detailed Requirements

If AS_07_Segmentation_DMS is used in an AS-07 file, encoders shall represent program segmentation by creating an MXF Timeline track in the file's Material Package, referred to as the Segmentation Track. Encoders shall construct the Segmentation Track's descriptive metadata in accordance with the recommendations of SMPTE EG 42:2004 and SMPTE ST 377:2011. Segmentation Tracks are forbidden in AS-07 Lower Level Source Packages.

An AS-07 file shall contain zero or one Segmentation Track. The Segmentation Track shall be identified by the presence of DM_AS_07_Segmentation_Framework objects in DM Segment objects on a Timeline track.

The Segmentation Track shall contain a Sequence object that is composed of DM Segment objects and Filler, if required.. The DM Segment objects shall contain a DM_AS_07_Segmentation_Framework. The MXF file's Preface:DMSchemes property shall contain a DM_AS_07_Segmentation_Scheme label that indicates the presence of segmentation descriptive metadata in the file.

The MXF Timeline Track:TrackName property shall be assigned the value "AS_07_Segmentation".

Filler objects in the segmentation track shall represent, and align with, regions of non-program content in the Source Essence (e.g. black, ident, clock, etc.). DM Segment objects (that contain DM_AS_07_Segmentation_Framework objects) shall represent, and align with, program content regions.

6.7.5.2.1.3 Segmentation Track SOM and EOM (informative)

Note that the start and end timecodes for program regions, commonly referred to as start of material (SOM) and end of material (EOM), may be determined based on the location of DM Segment objects on the Segmentation Track relative to the adjacent Timecode Track in the MXF Material Package that contains the Segmentation Track. The relevant metadata elements within the DM_AS_07_Segmentation set are AS_07_part_SOM and AS_07_part_duration, from which the SOM and EOM can be calculated.

6.7.5.2.2 Single/Soft/Hard-Parted Programs (informative)


A Single-Part Program is one that has optional non-program run-in followed by uninterrupted program content. This is represented using a single DM Segment on the segmentation track.

A Soft-Parted Program is one that has optional non-program run-in followed by uninterrupted program content that includes optional break points where a broadcaster may insert non-program content. This is represented using DM Segment objects that are not separated by Filler objects on the segmentation track. DM Segment objects that are adjacent to each other on a segmentation track shall always be considered soft. Users of Soft-Parted AS-07 files may nominate alternative break points or ignore break points.

A Hard-Parted Program is one that has optional non-program run-in followed by program content that is interrupted by non-program content. This is represented using multiple DM Segment objects that are separated by Filler objects on the segmentation track.

6.7.5.3 *DM_AS_07_Segmentation_Framework (informative)*

The DM_AS_07_Segmentation_Framework extends the generic MXF DM Framework class. It contains the segment's part number and the total number of parts in the program. These metadata items represent part numbers of the form "1 of 3", "2 of 3", "3 of 3". Refer to appendix G for the complete definitions of DM_AS_07_Segmentation_Framework and DM_AS_07_Segmentation_Scheme.

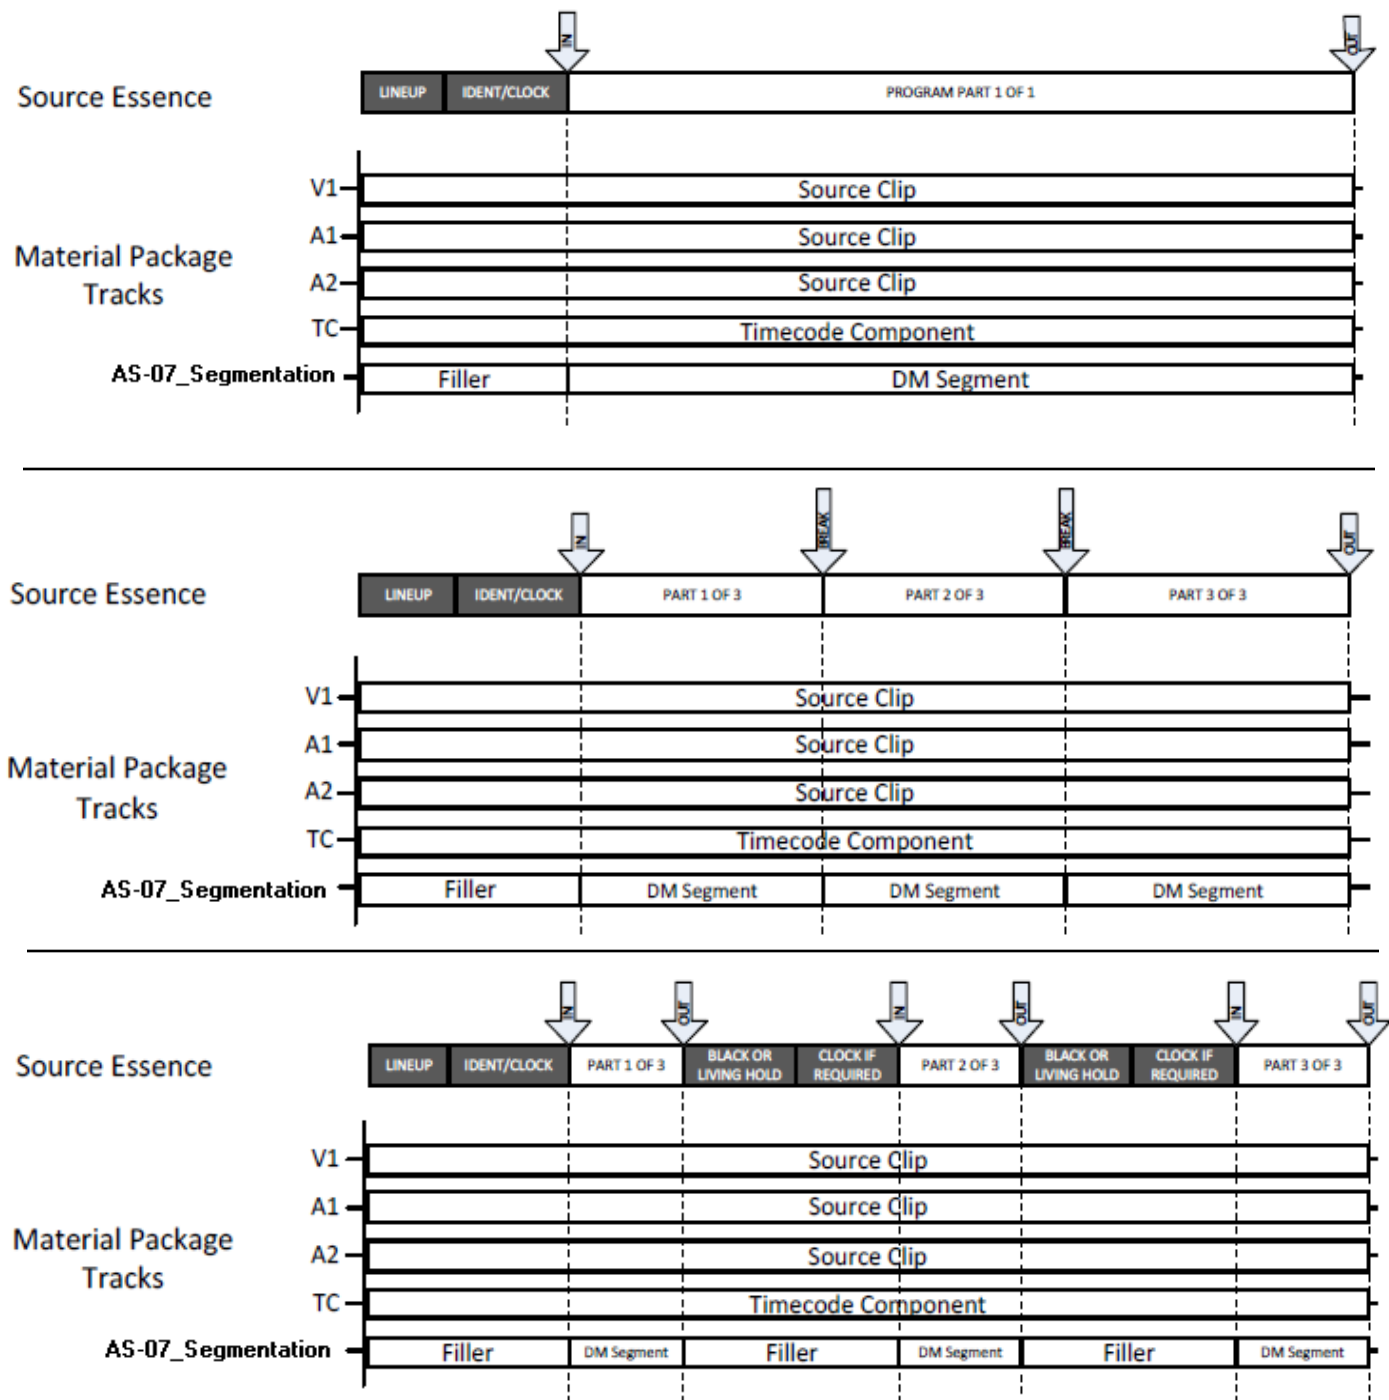

Illustrative examples of program segmentation. Top: single-part program with run-in followed by a single program segment. Middle: uninterrupted soft-parted program with identified break points where a user may interrupt playback to insert non-program content. The user may nominate alternative break points in the soft-parted case. Bottom: hard-parted program with run-in and regions of black and clock where a broadcaster must insert non-program content between segments.

6.7.5.4 Shim Parameter Table for Program Segmentation

Dimension	Description	Shim parameter	AS-07 Constraint	AS-07 Values
Program segmentation requirement	Segmentation track requirement	program_segmentation	Gentle	Mandated, Forbidden, Encouraged, Permitted
Program segmentation type	Shim limit as to the type of "parted-ness"	program_segmentation_type	Gentle	All types Soft-parted Hard-parted

7 Test Material (forthcoming)

Test material not available at this writing.

8 Appendix A. Recap: AS-07 Shim Parameters and Constraints (informative)

AS-07 shims will specify a value, as described, for each of the shim parameters listed in the main body of the specification (preceding this appendix). Shims specify additional constraints that make sense within the context of the general AS-07 requirements, i.e., constraints that tighten the conformance language that appears in the general specification (e.g. change *should* to *shall*).

For the sake of easy reference, all of the AS-07 shim parameters have been copied from section 6 and compiled in this informative appendix.

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
Essence Partitions (6.2.3.3)						
Essence Partition Strategy	Defines whether the essence is a single partition or divided into multiple partitions.	essence_partition_strategy	Strong	Single Multiple		
Index Tables (6.2.5.2)						
Single index location	If all Index Table Segments that compose one Complete Index Table are in one Partition, value shall be TRUE. Else (multiple Partitions), value shall be FALSE.	single_index_location	Moderate	True False		
Single essence location	If all Essence Containers are in one Partition, the value shall be TRUE. Else, (Essence Container Segments in multiple Partitions), value shall be FALSE.	single_essence_location	Moderate	True False		
Forward index direction	If all Index Table Segments that compose one Complete Index Table precede Essence Container Segments that they index, value shall be TRUE. Else (Index Table Segments follow Essence Container Segments), value shall be FALSE.	forward_index_direction	Moderate	True False		
CBE Index Tables	Use of Index Tables for CBE essences that omit the Index Entry Array (SMPTE ST 377-1:2011, section 11.1.9).	cbe_index_table	Moderate	Mandated, Forbidden, Encouraged, Permitted		

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
VBE Index Tables	Use of Index Tables for VBE essences that employ partial or sparse tables (SMPTE ST 377-1:2011, section 11.3).	vbe_index_tables	Moderate	Mandated, Forbidden, Encouraged, Permitted		
Picture Essence – JPEG 2000 Compressed (6.2.10.2.4)						
Picture family for JPEG 2000	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	Conform to ISO/IEC 15444-1:2004/Amd 3:2010; JPEG 2000 Core Coding Broadcast Profiles: Profile levels 6 and 7 (lossless) and levels 1 through 5 (lossy). Conform to ISO/IEC 15444-1:2004/Amd 1:2006; JPEG 2000 Core Coding Profiles for digital cinema applications: Profiles for 4K and 2K (lossy)		
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor		
Picture format (CDCI)	If Descriptor is CDCI, picture raster, aspect ratio, and frame rate	picture_format_CDCI	Moderate	If CDCI Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.		
Permitted component depth (CDCI)	if Descriptor is CDCI, <i>Component Depth</i> types that may be present in the file	permitted_component_depth_CDCI	Moderate	If CDCI Descriptor: Any permitted by SMPTE ST 377-1:2011, sections F.4.2 and G.2.26.		
Permitted J2CLayout (CDCI)	if Descriptor is CDCI, <i>PixelLayout</i> types that may be present in the file, with J2CLayout subdescriptor	permitted_J2CLayout_CDCI	Moderate	If CDCI Descriptor, any permitted by SMPTE ST 422:2014 Shall not be present.		

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
Picture format (RGBA)	if Descriptor is RGBA, picture raster, aspect ratio, and frame rate	picture_format_RGBA	Moderate	If RGBA Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.		
Permitted pixel layout (RGBA)	if Descriptor is RGBA, <i>PixellLayout</i> types that may be present in the file	permitted_pixel_layout_RGBA	Moderate	If RGBA Descriptor, any permitted in SMPTE 377-1:2011.		
Permitted J2C layout (RGBA)	if Descriptor is RGBA, <i>J2CLayout</i> types that may be present in the file, with J2CLayout subdescriptor	permitted_J2C_layout_RGBA	Moderate	If RGBA Descriptor, any permitted by SMPTE ST 422:2014 Shall not be present.		
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	SD 360 Mbps HD 1.5 Gbps		
Permitted pixel layout	<i>PixellLayout</i> and/or <i>J2CLayout</i> types that may be present in the file	permitted_pixel_layout	Moderate	Any		
Permitted containers	Essence container types that may be present in the file.	permitted_essence_container	Moderate	Any of MXFGCJP2K_P1 MXFGCJP2K_I1 MXFGCJP2K_I2		
Picture Essence – Uncompressed (6.2.10.3.4)						
Picture family for uncompressed	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	Uncompressed carried in a SMPTE ST 384-compliant GC Element, using bitstream codings as specified in SMPTE ST 377-1:2009 (or later), annex G.2.25.		
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor		
Picture format (CDCI)	If Descriptor is CDCI, picture raster, aspect ratio, and frame rate	picture_format_CDCI	Moderate	If CDCI Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.		
Permitted component depth (CDCI)	if Descriptor is CDCI, <i>Component Depth</i> types that may be present in the file	permitted_component_depth_CDCI	Moderate	If CDCI Descriptor: Any permitted by		

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
				SMPTE ST 377-1:2011, sections F.4.2 and G.2.26.		
Permitted J2C layout (CDCI)	if Descriptor is CDCI, <i>J2CLayout</i> types that may be present in the file, if the Descriptor is CDCI	permitted_J2C_layout_CDCI	Moderate	Shall not be present.		
Picture format (RGBA)	If Descriptor is RGBA, picture raster, aspect ratio, and frame rate	picture_format_RGBA	Moderate	If RGBA Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.		
Permitted pixel layout (RGBA)	<i>PixelLayout</i> types that may be present in file, if Descriptor is RGBA	permitted_pixel_layout_RGBA	Moderate	If RGBA Descriptor, should be equal to the distinguished value in SMPTE 377-1:2011, sections F.4.3 and G.2.36.		
Permitted J2C layout (RGBA)	<i>J2CLayout</i> types that may be present in file, if Descriptor is RGBA	permitted_J2C_layout_RGBA	Moderate	Shall not be present.		
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	SD 360 Mbps HD 1.5 Gbps		
Permitted pixel layout	<i>PixelLayout</i> types that may be present in the file	permitted_pixel_layout	Moderate	Any		
Permitted ITU-R format standards	ITU-R formats that may be present in the file, or an equivalent format if fully specified in a shim	permitted_ITU-R_formats	Gentle	BT.601 (SD) BT.709 (HD) BT.2020 (UHDTV) Specified in a shim Will expand in future		
Permitted containers	<i>EssenceContainerLabel</i> types that may be present in the file.	permitted_essence_container	Moderate	Any frame-wrapped container permitted by SMPTE ST 384:2005.		
Picture Essence – Retain Source Encoding as Acquired (6.2.10.4.5)						
Picture family for retain born digital as acquired	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	MPEG (ST 381-1 and 381-2) DV-DIF (ST 383) SDTI-CP (ST 385) D-10 (ST 386) D-11 (ST 387) JPEG 2000 (ST 422) VC-3 (ST 2019) VC-1 (ST 2037) AVC (ST 381-3)		

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
				Forbidden		
Picture format	Picture raster and aspect ratio	picture_format	Moderate	Any raster permitted by ST 352:2013 Forbidden		
Picture bitrate	Bits per second in real time	picture_bitrate	Gentle	Up to 1.5 Gbps Forbidden		
Permitted pixel layout	<i>PixelLayout</i> types that may be present in the file	pixel_layout	Moderate	Any permitted by the following MXF mapping standards: SMPTE ST 381-1:2005 SMPTE ST 381-2:2011 SMPTE ST 383:2008 SMPTE ST 385:2004 SMPTE ST 386:2004 SMPTE ST 387:2004 SMPTE ST 2019-1:2009 SMPTE ST 2037:2009 SMPTE ST 381-3 (forthcoming) Forbidden		
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor Forbidden		
Permitted containers	Essence container types that may be present in the file.	permitted_essence_container	Moderate	Any frame-wrapped container permitted by the following MXF standards: SMPTE ST 381-1:2005 SMPTE ST 381-2:2011 SMPTE ST 383:2008 SMPTE ST 385:2004 SMPTE ST 386:2004 SMPTE ST 387:2004 SMPTE ST 2019-1:2009 SMPTE ST 2037:2009 SMPTE ST 381-3 (forthcoming) Forbidden		

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
Audio Essences (6.2.11.6)						
Sound family	Sound signal schemes (compression or sampling or other)	sound_family	Moderate	PCM 192 kHz 24 bit PCM 96 kHz 24 bit PCM 88.2 kHz 24 bit PCM 48 kHz 24 bit PCM 48 kHz 16 bit PCM 44.1 kHz 16 bit PCM 32 kHz 12 bit Additional pull-down and pull-up PCM sampling frequencies for fractional frame rates: 192192, 191808, 96096, 95904, 88112, 88288, 48048, 47952, 44144, 44056, 32032, and 31968 Hz. AC-3 NICAM Other MPEG schemes, e.g., layer 2 or layer 3 (MP3), or AAC (ST 338)		
Sound language tagging	Tagging of soundtrack languages that may be present, to be identified in AS_07_Core_DMS using codes from RFC 5646 (2009), e.g., en-US, fr-CA. Tagging mandated when languages are required.	sound_language_tagging	Moderate	Mandated, Forbidden, Encouraged, Permitted		
Sound language repertoire	Soundtrack languages required by a shim	sound_language_repertoire	Moderate	Identifiers selected from RFC 5646 Null		
Captions, Subtitles, and Timed Text (6.2.12.9)						
Caption	Carriage of CEA-608 or -708 captions (from source material or if newly produced)	caption_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted		
Caption signal scheme	Captions signal schemes	caption_scheme	Strong	CEA-608 in SMPTE ST 436:2006 CEA-708 in SMPTE ST 436:2006		

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
EBU Subtitles	Carriage of EBU Tech 3264 STL (from source material or if newly produced)	ebu_stl_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted		
SMPTE or EBU Timed Text	Carriage of SMPTE or EBU Timed Text (when converted from CEA-608, CEA-708, or EBU STL, or if newly produced)	tt_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted		
Timed Text signal scheme	Timed text signal scheme	tt_scheme	Strong	SMPTE ST 2075:2013 EBU Tech 3350		
VBI and ANC (6.2.13.3)						
VBI data essence	A list of supported data essence types permitted in a given shim, including specific parameters such as VBI lines supported.	VBI_data_essence	Strong	[List from SMPTE ST 436] [Any, all]		
ANC data essence	A list of supported data essence types permitted in a given shim, including specific parameters such as ANC packet types supported.	ANC_data_essence	Strong	[List from SMPTE ST 291] [Any, all]		
AFD and Pan-Scan (6.2.14.3)						
AFD codes	Selection of one or more of the 16 codes for AFD (SMPTE ST 2016-1:2009, Table 1)	AFD_codes	Gentle	Any		
Pan-Scan data	Pan-Scan carriage (SMPTE ST 2016-2:2007)	PanScan_data	Moderate	Mandated, Forbidden, Encouraged, Permitted		
Operational Patterns (6.3.6)						
Permitted Operational Patterns	MXF-specific Operational Pattern	operational_pattern_types	Strong	OP1a internal OP1b internal OP3c external		

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
Timecode (6.4.6)						
Master Timecode mode	Master Timecode mode requirement	master_timecode_mode	Strong	Drop frame Non-drop-frame Mode not declared		
Master Timecode frame rate	Master Timecode frame rate requirement	master_timecode_framerate	Gentle	Integer or rational numerical value representing the number of frames per second. No requirement		
Master Timecode start type	Type of clock start for Master Timecode	master_timecode_starttype	Gentle	Fixed value Start value derived from Historical Source Timecode Any value		
Fixed value Master Timecode start time	Prescribed start time for fixed-value Master Timecode	master_timecode_fixed_startvalue	Gentle	Any timecode value expressed as HH:MM:SS:FF No requirement		
Historical Source Timecode in LLSP, requirement type	Historical Source Timecode track instances in the LLSP	historical_source_timecode_LLSP	Gentle	Mandated, Forbidden, Encouraged, Permitted		
Header metadata (6.5.2)						
Program identification	Required identifiers	program_identification	Gentle	One of: UUID UMID UL Other		
Master Timecode	Master Timecode track in the Material Package, synthetic and continuous, labeled as Track 1.	master_timecode_track	Strong	Mandated		
Historical Source Timecode	One or more Historical Source Timecode tracks, with Descriptors and with Track Numbers 2 or greater.	historical_source_timecode_track	Strong	Mandated*		
Intimate metadata	Metadata that is intimately associated with the essences and which must be carried with the file including information about the ingest of the source stream.	intimate_metadata	Moderate	All of: Program Ident Track Ident Language Code Ingest Provenance Other per shim		
* Mandated when Historical Source Timecode is carried in Essence Container System Items or Data Items.						
Top-Level Source Packages (6.5.3.3)						

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
Top-level source package	Quantity of top-level source packages	tlsp_quantity	Strong	Single Multiple		
Descriptive Metadata Schemes (6.6.3)						
AS_07_GSP_B D_DMS binary data	Requirement to carry AS_07_GSP_BD_DMS for binary data in Generic Stream Partitions	AS_07_GSP_BD_DMS	Strong	Permitted*		
AS_07_GSP_T D_DMS text-based data	Requirement to carry AS_07_GSP_TD_DMS for text-based data in Generic Stream Partitions	AS_07_GSP_TD_DMS	Strong	Permitted**		
AS_07_Segmentation_DMS segmentation data	Requirement to carry AS_07_Segmentation_DMS for segmented essences	AS_07_Segmentation_DMS	Strong	Permitted***		
Additional Descriptive Schemes	Carriage of Additional Descriptive Schemes	additional_DMS	Gentle	Mandated, Forbidden, Encouraged, Permitted		
* Mandated when binary data is carried in a Generic Stream Partition, otherwise permitted. ** Mandated when text-based data is carried in a Generic Stream Partition, otherwise permitted. *** Mandated when segmented essences are carried in an AS-07 file, otherwise permitted.						
Manifest (6.7.1.7)						
Manifest	Manifest required	manifest	Strong	Mandated, Forbidden, Encouraged, Permitted		
Content Integrity (6.7.2.9)						
Content integrity	Content integrity data required	content_integrity	Strong	Mandated, Forbidden, Encouraged, Permitted		
MIC algorithm	Type of integrity algorithm supported by decoders	mic_algorithm_decoder	Strong	CRC-32C CRC-32 MD5 SHA-1 SHA-256 SHA-512		
MIC carriage	MIC carriage location in file	mic_carriage	Strong	SystemItem Encrypted Triplet Variable Length Pack		
File names (6.7.3.2)						
File names	File name restrictions	filenames	Gentle	No constraint [Filename pattern as described in shim specification]		
Program Segmentation (6.7.5.4)						

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Cells to carry shim constraint</i>	<i>Cells to carry shim values</i>
Program segmentation requirement	Segmentation track requirement	program_segmentation	Gentle	Mandated, Forbidden, Encouraged, Permitted		
Program segmentation type	Shim limit as to the type of "parted-ness"	program_segmentation_type	Gentle	All types Soft-parted Hard-parted		

9 Appendix B. AS-07 Audio Layout Configurations, Identifiers, and Expected Values

B.1 Introduction (informative)

AS-07 audio layout configurations are specified in section 6.2.11.7. This requires the carriage of certain values under the AS_07_Core_DMS_AudioTrackLayout element and permits additional comments to be carried under the AS_07_Core_DMS_AudioTrackLayoutComment element. The following tables provide information about those values.

This appendix contains two main parts:

- **B.2. Audio layout configuration table.** General overview table with ID values.
- **B.3 Expected layout detail tables.** These are the tables referenced in the first column of overview table B.1.

This appendix covers all specified layouts for this edition of AS-07; additional layouts are anticipated for future editions. Although comments are permitted in the DMS metadata for any layout, there are expected track assignments for 7 layouts, and these will warrant comments when there is deviation from the expected values as listed in appendix section B.3.

B.2 Audio layout configuration table

Detail table reference	Item UL	Text-based ID	Descriptive name for audio layout	Comment
AUDIO LAYOUT IDENTIFICATIONS DEFINED IN INITIAL PUBLICATION OF AS-07				
Layouts to be identified by AS-07 encoders				Support Baseband Video Shim
	060e2b34.04010101.0d0e0101.07020401	AudioLayoutSilence	No content on audio channels (AS-11 "valid silence")	<i>Likely to be encountered in analog tape source media</i>
	060e2b34.04010101.0d0e0101.07020402	AudioLayoutUnknown	Unknown, undefined	<i>Likely to be encountered in analog tape source media</i>
1	060e2b34.04010101.0d0e0101.07020403	AudioLayout1TrackUndef	One track detected, content undefined	<i>Likely to be encountered in analog tape source media</i>
2	060e2b34.04010101.0d0e0101.07020404	AudioLayout2TrackUndef	Two tracks detected, content undefined	<i>Likely to be encountered in analog tape source media</i>
3	060e2b34.04010101.0d0e0101.07020405	AudioLayout3TrackUndef	Three tracks detected, content undefined	<i>Likely to be encountered in analog tape source media</i>
4	060e2b34.04010101.0d0e0101.07020406	AudioLayout4TrackUndef	Four tracks detected, content undefined	<i>Likely to be encountered in analog tape source media</i>
Layouts to be identified by encoding organizations, and provided as input to the encoder				Support Baseband Video Shim
5	060e2b34.04010101.0d0e0101.07020407	AudioLayout1TrackAudio	One track (one audio)	<i>Likely to be encountered in analog tape source media</i>

6	060e2b34. 04010101. 0d0e0101. 07020408	AudioLayout2TracksAudio	Two tracks (two audio)	<i>Likely to be encountered in analog tape source media</i>
7	060e2b34. 04010101. 0d0e0101. 07020409	AudioLayout1TrackAudio1TrackTime code	Two tracks (one audio, one timecode)	<i>Likely to be encountered in analog tape source media</i>
8	060e2b34. 04010101. 0d0e0101. 0702040a	AudioLayout3TracksAudio	Three tracks (three audio)	<i>Likely to be encountered in analog tape source media</i>
9	060e2b34. 04010101. 0d0e0101. 0702040b	AudioLayout2TrackAudio1TrackTime code	Three tracks (two audio, one timecode)	<i>Likely to be encountered in analog tape source media</i>
10	060e2b34. 04010101. 0d0e0101. 0702040c	AudioLayout4TrackAudio	Four tracks (four audio)	<i>Likely to be encountered in analog tape source media</i>
11	060e2b34. 04010101. 0d0e0101. 0702040d	AudioLayout3TrackAudio1TrackTime code	Four tracks (three audio, one timecode)	<i>Likely to be encountered in analog tape source media</i>
	060e2b34. 04010101. 0d0e0101. 07020410	AudioLayoutEBU48_2a	EBU R 48: 2a (For 4 ch. only)	<i>Reference EBU standard, pattern from AS-11</i>
	060e2b34. 04010101. 0d0e0101. 07020411	AudioLayoutEBU123_4b	EBU R 123: 4b (For 4 ch. only)	<i>Reference EBU standard, pattern from AS-12</i>
	060e2b34. 04010101. 0d0e0101. 07020412	AudioLayoutEBU123_4c	EBU R 123: 4c (For 4 ch. only)	<i>Reference EBU standard, pattern from AS-13</i>
	060e2b34. 04010101. 0d0e0101. 07020413	AudioLayoutEBU123_16c	EBU R 123: 16c (For 16 ch. only)	<i>Reference EBU standard, pattern from AS-14</i>
	060e2b34. 04010101. 0d0e0101. 07020414	AudioLayoutEBU123_16d	EBU R 123: 16d (For 16 ch. only)	<i>Reference EBU standard, pattern from AS-15</i>
	060e2b34. 04010101. 0d0e0101. 07020415	AudioLayoutEBU123_16f	EBU R 123: 16f (For 16 ch. only)	<i>Reference EBU standard, pattern from AS-16</i>
	060e2b34. 04010101. 0d0e0101. 07020420	AudioLayoutST377_4MCA	SMPTE ST 377-4 Multichannel Audio (MCA)	<i>AS-07 encoders must also embed the descriptors and subdescriptors specified in SMPTE ST 377-1 and ST 377-4.</i>
AUDIO LAYOUT IDENTIFICATIONS TO BE DEFINED IN FUTURE AS-07 UPDATES				
	tbd	tbd	Configuration as specified by various broadcasters	
	tbd	tbd	Configurations for digital cinema as specified in SMPTE ST 429-12 and elsewhere.	
	tbd	tbd	Additional configurations to be determined.	

B.3 Expected audio layout detail tables

These are the tables referenced in the first column of the overview table above.

TABLE 1

One track detected, content undefined

Track	Expected	Other, should be commented in DMS
1	Undefined	n/a

TABLE 2

Two tracks detected, content undefined

Track	Expected	Other, should be commented in DMS
1	Undefined	n/a
2	Undefined	n/a

TABLE 3

Three tracks detected, content undefined

Track	Expected	Other, should be commented in DMS
1	Undefined	n/a
2	Undefined	n/a
3	Undefined	n/a

TABLE 4

Four tracks detected, content undefined

Track	Expected	Other, should be commented in DMS
1	Undefined	n/a
2	Undefined	n/a
3	Undefined	n/a
4	Undefined	n/a

TABLE 5

One track audio

Track	Expected	Other, should be commented in DMS
1	Mono audio	n/a

TABLE 6

Two tracks audio

Track	Expected	Other, should be commented in DMS
1	Left channel	Dual mono, or other
2	Right channel	Dual mono, or other

TABLE 7

Two tracks, one track audio, one track timecode

Track	Expected	Other, should be commented in DMS
1	Mono audio	Other
2	Timecode as audio	Other

TABLE 8

Three tracks audio

Track	Expected	Other, should be commented in DMS
1	Left channel	Other
2	Right channel	Other
3	Center channel	Other, e.g., DVS, SAP

TABLE 9

Three tracks, two tracks audio, one track timecode

Track	Expected	Other, should be commented in DMS
1	Left channel	Other
2	Right channel	Other, e.g., DVS, SAP
3	Timecode as audio	Other

TABLE 10

Four tracks audio

Track	Expected	Other, should be commented in DMS
1	Left front channel	Other

AS-07: MXF Archive and Preservation Format

2	Right front channel	Other
3	Left rear channel	Other, e.g., DVS, SAP
4	Right rear channel	Other, e.g., DVS, SAP

TABLE 11


Four tracks, three tracks audio, one track timecode

Track	Expected	Other, should be commented in DMS
1	Left channel	Other
2	Right channel	Other
3	Center channel	Other, e.g., DVS, SAP
4	Timecode as audio	Other, e.g., DVS, SAP

10 Appendix C. Timecode Descriptors and Subdescriptors

C.1 Explanatory Illustrative Diagram


C.1.1 Source videotape illustrative example



- Source: 1-inch videotape with timecode
- Picture; footage with slate and camera starts and stops.
 - *VITC* in line 14 (discontinuous, jumps to zero in gaps)
 - *Visual representation of AS-07 MXF Essence Container carriage is offered in the diagram in the next section.*
- Audio: four channels
 - stereo audio on A1 and A2
 - silence on A3
 - *LTC* on A4 (discontinuous, repeats a frame number)

C.1.2 In the resulting AS-07 MXF File

C.1.2.1 Essence in Generic Container

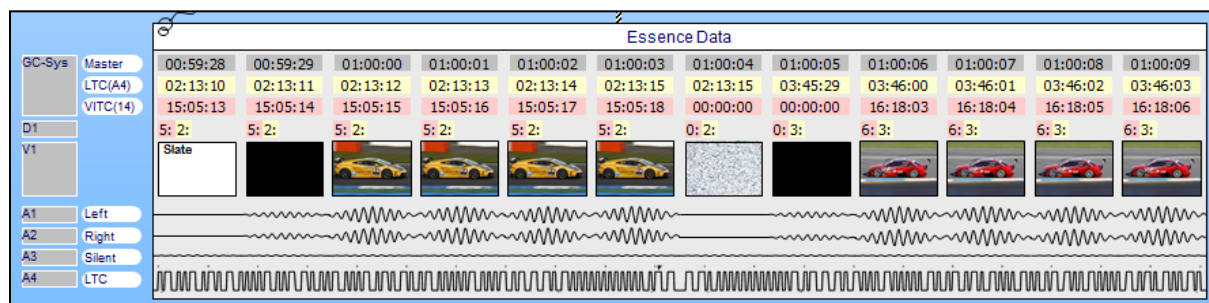

Top (labeled GC-Sys): Generic Container System Items:


- Gray: Master Timecode (synthetic), GCSys Item, element 0
- Yellow: converted LTC, additional GCSys Item
- Pink: ATC (Advanced Timecode, SMPTE ST 12-2); VITC converted to ANC packets

Top (labeled D1): Packetized VITC and LTC

Middle (labeled V1): picture essence (row of images, including starts/stops/snow)

Bottom:

- **Labeled A1:** left
- **Labeled A2:** right
- **Labeled A3:** silent
- **Labeled A4:** LTC (as PCM waveform)

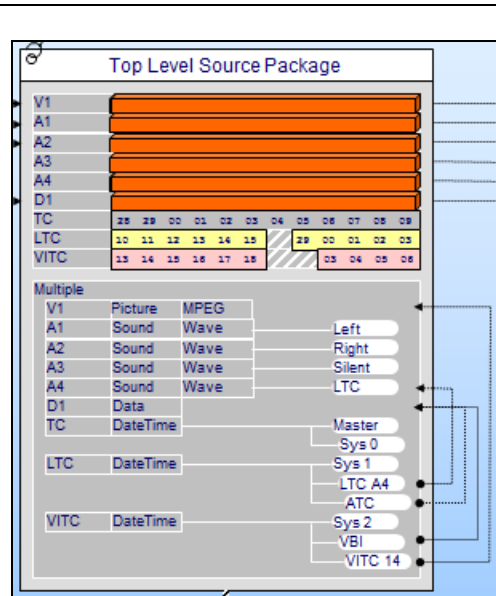C.1.2.2 Top Level Source Package, with Descriptors and Subdescriptors**MXF Top Level Source Package (TLSP)**

- Six essence and data tracks (orange):
 - 1 picture
 - 4 audio
 - 1 data
- Three TC tracks:
 - *Gray*: TC (Master TC)
 - *Yellow*: LTC
 - *Pink*: VITC
- At bottom:
 - Descriptors (gray)
 - Subdescriptors (white)

Master TC in two places, thus two Subdescriptors

- Master TC track, with the symbolic label *Master*
- GCSys with Master, in element 0 (zero) of the GCSys, symbolic label *Sys 0*

LTC in two places, thus two Subdescriptors

- Second item in GCSys, symbolic label *Sys 1*
- Audio track 4, symbolic label *LTC* with the added Essence TrackID property: *A4*
 - *This Subdescriptor has a LinkedTrackID to connect it to the A4 audio track (dotted line arrow)*
- ATC version of LTC, symbolic label *ATC*
 - *This Subdescriptor has a LinkedTrackID to connect it to the D1 data track (dotted line arrow)*


VITC in three places, thus three Subdescriptors

- VITC ingested into the GCSys, symbolic label *Sys 2*
- VBI as Data Item in GC, symbolic label *VBI*
 - *This Subdescriptor has a LinkedTrackID to connect it to the D1 data track (dotted line arrow)*
- VITC in video raster retained on line 14, symbolic label *VITC 14*
 - *This Subdescriptor has a LinkedTrackID to connect it to the V1 picture track (dotted line arrow)*

Note: TLSP track data is metadata. Note that in this example, there is a sequence of components in the LTC and VITC tracks, showing the first segment, filler, and then the second segment.

Regarding the audio tracks: Subdescriptors employ tags from SMPTE ST 377-04 MCA (Multichannel Audio): *left, right, silent, LTC*.

C.1.2.3 Lower Level Source Package

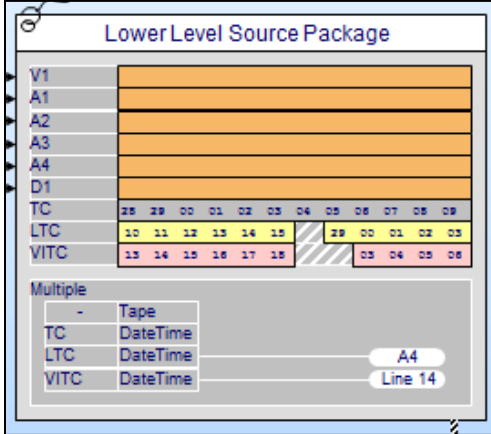


Lower Level Source Package

- Six essence and data tracks (golden):
 - 1 picture
 - 4 audio
 - 1 data
- Three TC tracks:
 - *Gray*: TC (Master TC)
 - *Yellow*: LTC
 - *Pink*: VITC
- At bottom:
 - Descriptors (gray)
 - Subdescriptors (white)

The structure of Descriptors and Subdescriptors is simpler than for the Top Level Source Package. Subdescriptors are provided only for audio track 4 and line 14 in the vertical interval. These Subdescriptors are text (not symbolic) labels.

C1.2.4 Material Package

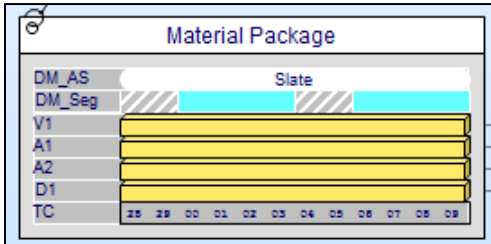


Material Package

- Governs playback of program content
- Four essence and data tracks (yellow)
 - 1 picture
 - 2 audio ("stereo")
 - 1 data
- AS-07 DMS metadata for the slate
- AS-07 DMS metadata for segmentation (if any)

C.1.2.5 Unified Diagram and Selected Identifiers

The next section in this appendix presents all of the preceding elements in a single, unified diagram. The diagram also shows the presence and linking for some selected identifiers, all of which are part of the normal set required by the MXF family of standards. These identifiers have limited connection to the AS-07 timecode specifications. Each of the packages--Material Package (MP), Top Level Source Package (TLSP), and Lower Level Source Package (LLSP)--has a PackageID in the form of a UMID, drawn to resemble baggage tags. In addition, the tracks inside the packages have TrackIDs that, together with other metadata, establishes the linking relationships shown as dotted arrow lines.

C.2 Unified Diagram for AS-07 Ingest of 1-inch Type C

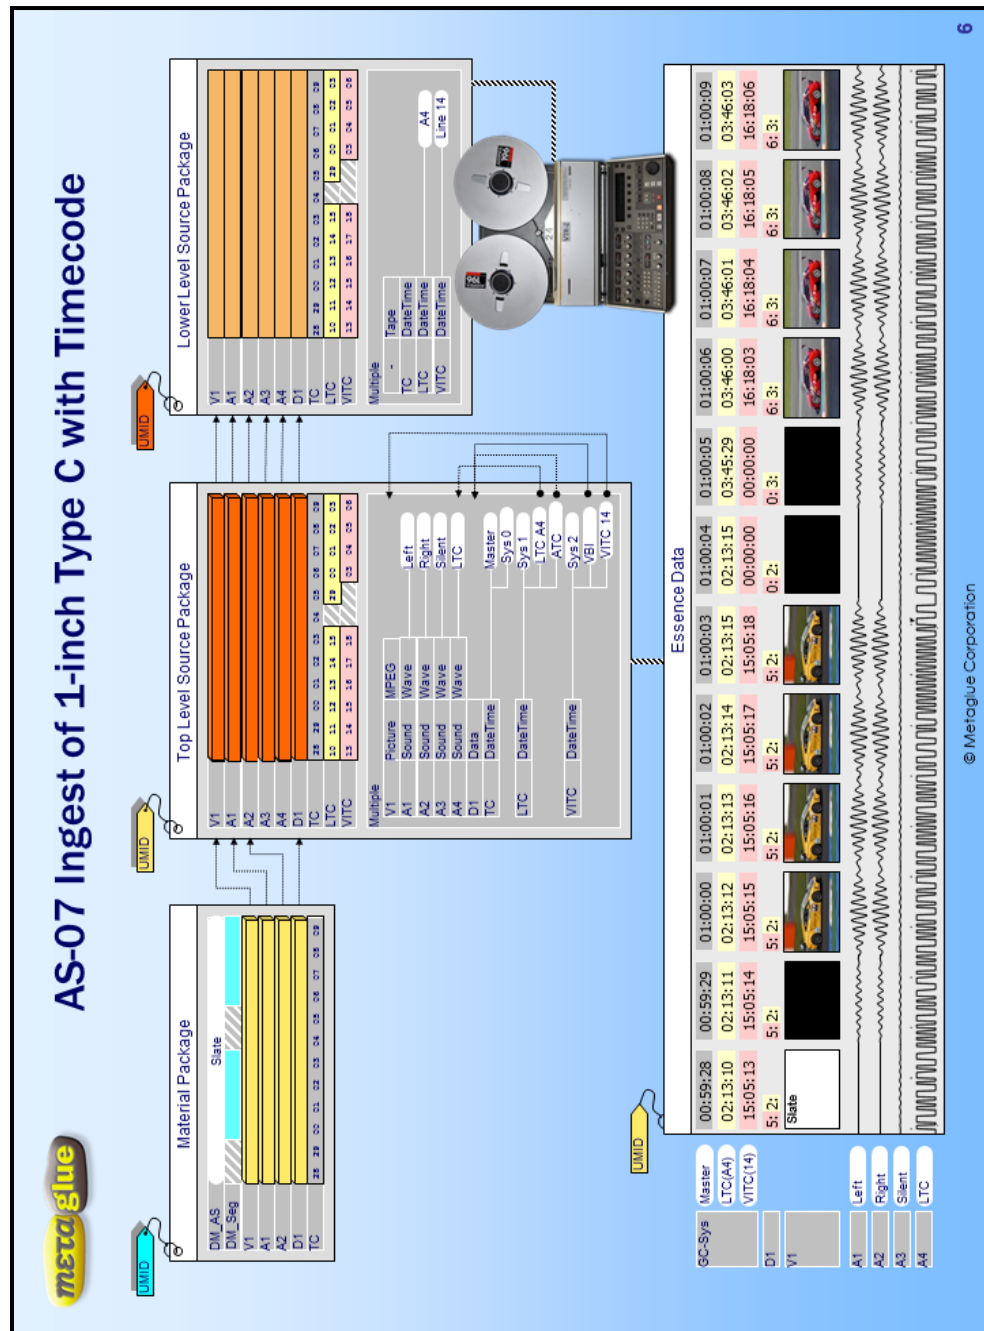

C.3 Timecode Header Label Descriptor

The DateTimeDescriptor for AS-07, described in 6.4.3, is derived from the one specified by SMPTE ST 385 table 3.

Item Name	Type	Len	Local Tag	Item UL	Req?	Meaning	Default	Informative Comment
Generic Descriptor	Group UL	16		As defined in ST 377-1 (see Table 19) and ST385 table 4	Req	Defines the Date/Time Descriptor		Standard MXF element and values
All items in ST 377-1, A.1 except the Key or Group UL and the Length, if present	See A.1		See A.1	See ST 377-1, A.1	See A.1	See A.1		Standard MXF element and values
Locators	Array of StrongRef (Locators)	8+ 16n	2F.01	06.0E.2B.340 1.01.01.0206. 01.01.0406.03 .00.00	Opt	Array of strong references to Locator Sets If present, Essence may be located external to the file. If there is more than one Locator Set an MXF decoder shall use them in the order specified. [RP 210 Specifies a vector of references to essence locators]		Standard MXF element and values
Subdescriptors	Array of StrongRef (Subdescriptors)	8+ 16n	dyn	06.0E.2B.340 1.01.01.0906. 01.01.0406.10 .00.00	Opt	Array of strong references to Subdescriptor Sets (see 10.5.4) [RP 210 Specifies a vector of an ordered set of references to Subdescriptor sets]		Standard MXF element and values
LinkedTrackID	UInt32 (Track ID)	4	30.06	06.0E.2B.340 1.01.01.0506. 01.01.0305.00 .00.00	Opt	Link to (i.e. value of) the Track ID of the Track in this Package to which the Descriptor applies. [RP 210 Link to (i.e. value of) the Track ID of the Track in this Package to which the Essence Descriptor applies.]		Standard MXF element and values
Sample Rate	Rational	8	30.01	06.0E.2B.340 1.01.01.0104. 06.01.0100.00 .00.00	Req	The rate of non-divisible, contiguously accessible units of the byte stream of an Essence Element (not the Essence (Pixel) sampling clock rate) [RP 210 Specifies the number of addressable elements of essence]		This element gives the duration of each timecode sample.

AS-07: MXF Archive and Preservation Format

						data per second]		
Container Duration	Length	8	30.02	06.0E.2B.340 1.01.01.0104. 06.01.0200.00 .00.00	Opt	Duration of Essence Container (measured in Edit Units) A file writer should write the best value it can write. If it cannot be completed, the Item should be omitted. [RP 210 Specifies the number of addressable elements of essence data]		Standard MXF element and values
Essence Container	UL	16	30.04	06.0E.2B.340 1.01.01.0206. 01.01.0401.02 .00.00	Req	The UL identifying the Essence Container described by this Descriptor. Listed in SMPTE 400M (RP 224) [RP 210 Specifies a reference to the format of Container of Essence Data]		Standard MXF element and values
Codec	UL	16	30.05	06.0E.2B.340 1.01.01.0206. 01.01.0401.03 .00.00	Opt	UL to identify a codec compatible with this Essence Container. Listed in SMPTE 400M (RP 224) [RP 210 Specifies a reference to the codec used to create Essence Data]		Standard MXF element and values
DateTimeRate	Rational	8	35.01	06.0E.2B.340 1.01.01.0504. 04.01.0201.00 .00.00.	Opt	Defines the Date/Time rate where this differs from the essence container rate	Sample Rate	Rational expression of frames per second (fps)
DateTimeDrop Frame	Boolean	1	35.02	06.0E.2B.340 1.01.01.0504. 04.01.0202..0 0.00.00	Opt	TRUE if drop-frame is active	FALSE	Flag to indicate whether the timecode is drop frame or not
DateTimeEmbedded	Boolean	1	35.03	06.0E.2B.340 1.01.01.0504. 04.01.0203.00 .00.00	Opt	Is it embedded in other data?	TRUE	Flag to indicate whether the timecode also appears in the Essence of the file
DateTimeKind	UL	16	35.04	06.0E.2B.340 1.01.01.0504. 04.01.0204.00 .00.00	Req	Date/Time format kind. Values are listed in SMPTE RP224		ULs required to identify AS-07 Master and Historical Source Timecode types will be added to RP 224

Note that a single DateTimeDescriptor can simultaneously describe both a Timecode Track and an Essence Timecode. The LinkedTrackID property specifies the Track that is described; the DateTimeEmbedded flag indicates if the timecode data is also embedded in the essence.

C.4 Timecode Header Label Subdescriptor

The Subdescriptors property shall strongly reference a TimecodeLabelSubdescriptor, which is derived from SMPTE ST 377-1, annex B.3.

Item Name	Type	Len	Local Tag	Item UL	Req ?	Meaning	Default	Informative comment
TimecodeLabel Subdescriptor	Group UL	16		060e2b34.027f0101.0d0e0101.07040100	Req	Defines the TimecodeLabel subclass of the Subdescriptor Class		<i>ULs required to identify AS-07 Master and Historical Source Timecode types will be added to RP 224</i>
All items in ST 377-1, B.3 except the Key or Group UL and the Length, if present	See B.3		See B.3	See ST 377-1, B.3	See B.3	See B.3		<i>Standard MXF element and values</i>
DateTime Symbol	UTF16String	var	Dyn	060e2b34.010101.0d0e0101.07040101	Req	Symbol that specifies the timecode, values listed in RP224		<i>Coded description of the timecode type that can be understood by humans</i>
DateTimeEssenceTrackID	UInt32	4	Dyn	060e2b34.010101.0d0e0101.07040102	Opt	<i>Link to (i.e. value of) the Track ID of the audio track where the timecode data is stored in a Top Level Source Package. If this optional property is absent, this implies that the timecode data contained in the Timecode Track is Master Timecode and there is no timecode data on essence tracks. If provided, values shall conform to SMPTE ST 377-1:2011 (table B.15): for Master Timecode, the value shall be 1 (one), and for Historical Source Timecode, even if there are multiple instances, the value shall be 0 (zero).</i>		<i>Standard MXF element and values if applicable</i>
DateTimeChannelID	UInt32	4	Dyn	060e2b34.010101.0d0e0101.07040103	Opt	The numerical channel identifier within the essence, if applicable. DateTimeChannelID assignment shall begin with 0 (zero), except for	0	<i>The number of the audio channel on which the timecode data is stored.</i>

AS-07: MXF Archive and Preservation Format

						ATC (described in SMPTE ST 12-2 and SMPTE ST 12-3), the value shall be DBB1.		
DateTime Description	UTF16String	var	Dyn	060e2b34.0101010d0e0101.07040104	Opt	Additional optional text description of the timecode origin or role or details		<i>Text description of the type and location of timecode. This may provide information such as VITC on Line 21.</i>

11 Appendix D. Data Dictionary for AS-07 Core Descriptive Metadata Scheme and DMS Device Objects

D.1 Data Dictionary for AS-07 Core Descriptive Metadata Scheme

The scheme labeled *AS_07_Core_DMS* pertains to the whole file and defines the required metadata that is included in all AS-07 files (see 6.6).

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
General Information							
AS_07_Core_DMS	DM_Scheme			060e2b34.04 010101.0d01 0701.070100 00			<i>Required Core Metadata for AS-07 Archiving and Preservation Format</i>
AS_07_Core_DMS_Framework	DM_Framework			060e2b34.02 7f0101.0d0e 0101.070101 0			<i>AS-07 Descriptive Metadata</i>
AS_07_Core_DMS_ShimName	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070101 01	Req	1	<i>Controlled vocabulary string value indicating the AS-07 Shim Name, e.g., Derived from video serial interface</i>
File Identifiers							
AS_07_Core_DMS_Identifiers	Batch of StrongRef (AS_07_DMS_Identifier)	8+ 16n		060e2b34.01 010101.0d0e 0101.070101 02	Req	1 and n	<i>Unordered batch of strong references to all AS_07_DMS_Identifier sets. At least one AS_07_DMS_Identifier Objects set is required with the IdentifierRole = Main. Other AS_07_DMS_IdentifierObjects sets are optional.</i>
Responsible Organization Information							
AS_07_Core_DMS_ResponsibleOrganizationName	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070101 03	Req	1	<i>The main name for the entity responsible for the creation, maintenance, preservation of this digital item.</i>
AS_07_Core_DMS_ResponsibleOrganizationCode	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070101 05	Opt	0	<i>A familiar abbreviation of entity name.</i>
AS_07_Core_DMS_NatureOfOrganization	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070101 06	Opt	0	<i>The nature of an organization (e.g., limited company, government department, etc.)</i>
Title Information							
AS_07_Core_DMS_WorkingTitle	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070101	Opt	0 or 1	<i>Free text: Best known or working title of the production or production component</i>

AS-07: MXF Archive and Preservation Format

				07			
AS_07_Core_DMS_SecondaryTitle	UTF16String	Var		060e2b34.010101.0d0e0101.07010108	Opt	0 or 1	Free text: Secondary title of the production or production component
Basic Source Information							
AS_07_Core_DMS_PictureFormat	UTF16String			060e2b34.010101.0d0e0101.07010109	Req	1	The signal standard (frame resolution and aspect ratio) of the encoded file.
AS_07_Core_DMS_IntendedAFD	UTF16String			060e2b34.010101.0d0e0101.0701010a	Req	1	String value indicating the intended display format for the program, per SMPTE 2016-1 table 1 a3 a2 a1 a0 with optional informative appended text e.g. 1001 Pillarbox, 0100 Letterbox, 1000 FullHD
AS_07_Core_DMS_Captions	UTF16String			060e2b34.010101.0d0e0101.0701010b	Req	1	Y/N value to indicate if captions are present in the encoded file
Basic Audio Information							
AS_07_Core_DMS_AudioTrackPrimaryLanguage	UTF16String	Var	Dyn	060e2b34.010101.0d0e0101.0701010c	Opt	0 or 1	The primary language in audio track by codes as defined by RFC 5646. Use only when language is known.
AS_07_Core_DMS_AudioTrackSecondaryLanguage	UTF16String	Var	Dyn	060e2b34.010101.0d0e0101.0701010d	Opt	0 or 1	The secondary language in audio track by codes as defined by RFC 5646. If multiple secondary languages are present, the RFC tags in white space separated list. Use only when secondary languages are present and language is known
AS_07_Core_DMS_AudioTrackLayout	AUID			060e2b34.010101.0d0e0101.0701010e	Req	1	Appropriate values in AS-07 Appendix E.
AS_07_Core_DMS_AudioTrackLayoutComment	UTF16String			060e2b34.010101.0d0e0101.0701010f	Opt	0 or 1	Free text comment to augment AS_07_Core_DMS_AudioTrackLayout. This is for track tagging information and is not to be used for descriptive essays. Robust descriptive data can be held in Supplemental Metadata in GSPs.
Basic Capture History							
AS_07_Core_DMS_Devices	Batch of StrongRef (AS_07_Core_DMS_D	8+ 16n		060e2b34.010101.0d0e0101.07010110	Opt	0 and n	Unordered batch of strong references to all AS_07_Core_DMS_Device sets used in this file

	evices object)						
--	-------------------	--	--	--	--	--	--

D.2 Data Dictionary for AS-07-Core DMS Devices Object

AS_07_Core_DMS_Devices Object defines the unordered set of references that describe the device used to capture or create the content. These references are employed in AS_07_Core_DMS specified in appendix D.1.

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
AS_07_Core_DMS_Device	Set Key	16		060e2b34.02 7f0101.0d0e 0101.070102 00	Req	1	<i>Defines the AS_07_Core_DMS_Device Set</i>
<i>All items in SMPTE ST 377-1:2011 A.1 except the Key or Group UL and the Length, if present</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPT E ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	
AS_07_Core_DMS_DeviceType	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070102 02	Opt	0 or 1	<i>The kind of device used to capture or create the content (as either a commonly known name or as a locally defined name; e.g., Radio-camera)</i>
AS_07_Core_DMS_DeviceManufacturer	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070102 03	Opt	0 or 1	<i>The manufacturer or maker of the device</i>
AS_07_Core_DMS_DeviceModel	UTF8String	32 chars max		060e2b34.01 010101.0d0e 0101.070102 04	Opt	0 or 1	<i>Identifies the device model used in capturing or generating the essence.</i>
AS_07_Core_DMS_DeviceSerialNumber	UTF8String	32 chars max		060e2b34.01 010101.0d0e 0101.070102 05	Opt	0 or 1	<i>Alphanumeric serial number identifying the individual device</i>
AS_07_Core_DMS_DeviceUsageDescription	UTF16String	Var		060e2b34.01 010101.0d0e 0101.070102 06	Opt	0 or 1	<i>Free text description of the function or use of the device in the production of a specific content item</i>

12 Appendix E. Data Dictionary for AS-07 DMS Identifier Objects

AS_07_DMS_Identifier Objects defines the unordered set of references that describe the file and part identifiers in an AS-07 file. At least one AS_07_DMS_Identifier set is required in AS_07_Core_DMS with the IdentifierRole = Main. Other AS_07_DMS_Identifier sets are optional. AS_07_DMS_Identifier sets may also occur in other AS-07 DMSes.

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
AS_07_DMS_Identifier	Set Key	16		060e2b34.02 7f0101.0d0e 0101.070103 00	Req	1	<i>Defines the AS_07_DMS_Identifier Set</i>
<i>All items in SMPTE ST 377-1:2011 A.1 except the Key or Group UL and the Length, if present</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	<i>See SMPTE ST 377-1:2011 A.1</i>	
AS_07_DMS_Identifier Value	UTF16String			060e2b34.01 010101.0d0e 0101.070103 02	Req	1	<i>Identifier Value</i>
AS_07_DMS_Identifier Role	UTF8String			060e2b34.01 010101.0d0e 0101.070103 03	Req	1	Controlled vocabulary string value identifying the role of identifier: Main (universally unique primary identifier for the entire AS-07 file) Additional (additional, possibly local, identifier for the entire AS-07 file. Additional identifiers are not required to be universally unique) GSP (universally unique identifier for GSP payload)
AS_07_DMS_Identifier Type	UTF8String			060e2b34.01 010101.0d0e 0101.070103 04	Req	1	Controlled vocabulary string value identifying the type of identifier: UUID - UUID encoded as a URN according to IETF RFC 4122; UMID - Unique Material Identifier (UMID) defined by SMPTE ST 330M, represented as an URN per ST2029:2007; UL - Universal Label as defined by SMPTE ST 298:2009, represented as an URN per ST2029:2007; Other - A value not included in the controlled list, including archive specific values.
AS_07_DMS_Identifier Comment	UTF16String			060e2b34.01 010101.0d0e 0101.070103 05	Opt	0 or 1	<i>Free text comment pertaining to the additional identifier</i>

13 Appendix F. Data Dictionaries for AS-07 Generic Stream Partition DMS, Binary Data DMS, and Text-based Data DMS

F.1 Data Dictionary for AS-07-Generic Stream Partition DMS Object

The scheme labeled AS_07_GSP_DMS defines the Additional GSP descriptive information for AS-07.

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
AS_07_GSP_DMS_Object	GenericStreamTextBasedSet			060e2b34.027f0101.0d0e0101.07010400			Additional GSP descriptive information for AS-07
All items in RP 2057 table 7 <i>TextBasedObject</i>	<i>DM_set</i>			See RP 2057 table 7			Including <i>TextBasedMetadataPayloadSchemeID</i> , <i>TextMIMEMediaType</i> , <i>RFC5646TextLanguageCode</i> , <i>TextDataDescription</i>
All items in RP 2057 table 9 <i>GenericStreamTextBasedSet</i>	<i>TextBasedObject</i>			See RP 2057 table 9			Including <i>GenericStreamSID</i>
AS_07_GSP_DMS_Identifier	Batch of StrongRef (AS_07_DMS_Identifier objects)	8+ 16n		060e2b34.01010101.0d0e0101.07010401	Req	1 and n	Unordered list of strong references to all AS_07_DMS_Identifier sets. At least one AS_07_DMS_Identifier Objects set is required with the IdentifierRole = Main. Other AS_07_DMSIdentifierObjects sets are optional
AS_07_GSP_DMS_MIMEMediaType	UTF16String	Var	Dyn	060e2b34.01010101.0d0e0101.07010402	Req	1	Text string that defines the data type of the media. IANA MIME type shall be used if one has been established. If no IANA MIME type has been established, implementers shall register a new MIME type with IANA (http://www.iana.org/form/media-types), following procedures also described in RFC 6838) and use that MIME type, or use a zero-length string as the value.
AS_07_GSP_DMS_DataDescription	UTF8String	Var	Dyn	060e2b34.01010101.0d0e0101.07010403	Req	1	A controlled vocabulary string identifying the role of the data within the AS-07 file: <ul style="list-style-type: none"> • Graphic/image • Related document • Supplementary Metadata • Associated Material • Trailer/preview • Quality control/review data • Other (explain in AS_07_GSP_DMS_Note)

AS_07_GSP_DMS_Note	UTF16String		Var	060e2b34.0101010d0e0101.07010404	Opt	0	A free text note pertaining to the GSP data payload.
--------------------	-------------	--	-----	----------------------------------	-----	---	--

F.2 Data Dictionary for AS-07-Generic Stream Partition DMS

The scheme labeled *AS_07_GSP_DMS* defines the superclass metadata scheme for data stored in Generic Stream Partitions in AS-07 files (see 6.6). This scheme is further defined (as subclasses) for binary-data items and text-based-data items in appendixes F.3 and F.4 below.

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
AS_07_GSP_DMS	TextBased Framework	16		060e2b34.04010101.0d010701.07020100			Required Metadata Scheme for data stored in Generic Stream Partitions in AS-07 files
All items in RP 2057 table 6 TextBased DM Framework	DM_Framework			See RP 2057 table 6			Including TextBasedSet strong reference. The "Text-based Object" property of the table 6 shall be a Strong Ref of Instance UID of the instance of a "AS_07_GSP_DMS_Object" Object.

F.3 Data Dictionary for AS-07 GSP Binary Data Descriptive Metadata Framework

The framework labeled *AS_07_GSP_BD_DMS* defines the metadata for non-essence binary data stored in Generic Stream Partitions in AS-07 files (see 6.6).

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
AS_07_GSP_BD_DMS_Framework	DM_Framework	16		060e2b34.027f0101.0d0e0101.07020200			Binary Data GSP Object Group
All items in Appendix F.2	See Appendix F.2		See Appendix F.2	See Appendix C.1	See Appendix F.2		See Appendix F.2
No added elements in this edition of AS-07; reserved for future use.							

F.4 Data Dictionary for AS-07 GSP Text-based Data Descriptive Metadata Framework

The framework labeled *AS_07_GSP_TD_DMS* defines the metadata for non-essence text-based data stored in Generic Stream Partitions in AS-07 files (see 6.6).

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Meaning
-----------	------	-----	-----------	---------	------	--------	---------

AS-07: MXF Archive and Preservation Format

AS_07_GSP_TD_DMS_Framework	DM_Framework	16		060e2b34.027f0101.0d0e0101.07020300			<i>Text Data GSP Object Group</i>
<i>All items in Appendix F.2</i>	<i>See Appendix F.2</i>		<i>See Appendix F.2</i>	<i>See Appendix F.2</i>	<i>See Appendix F.2</i>		<i>See Appendix F.2</i>
AS_07_GSP_TD_DMS_PrimaryRFC5646LanguageCode	UTF16String	Var	Dyn	060e2b34.01010101.0d0e0101.07020301	Req	1	<i>Identifies the primary language in Timed Text by codes defined by RFC5646.</i>
AS_07_GSP_TD_DMS_SecondaryRFC5646LanguageCode	UTF16String	Var	Dyn	060e2b34.01010101.0d0e0101.07020302	Opt	0 or 1	<i>Identifies the secondary language in Timed Text by codes defined by RFC 5646. If multiple secondary languages are present, the RFC tags in white space separated list. Use only when secondary languages are present and language is known.</i>

14 Appendix G. Data Dictionaries for Segmentation DMS and Parts Objects

G.1 Data Dictionary for Segmentation DMS

The scheme labeled *AS_07_Segmentation_DMS* defines the metadata scheme for AS-07 files that segment essence data (see 6.6).

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Description
AS_07_Segmentation_DMS	DM_Scheme			060e2b34.04010101.0d010701.07030000			<i>Required Metadata Scheme for AS-07 files that segment essence data</i>
AS_07_Segmentation_DMS_Framework	DM_Framework			060e2b34.027f0101.0d0e0101.07030100			<i>Metadata for AS-07 files that segment essence data</i>

G.2 Data Dictionary for AS-07 Segmentation DMS Part Objects

AS_07_Segmentation_DMS_Part Objects defines the unordered set of references that describe the parts within a program, and these elements are used by *AS_07_Segmentation_DMS* (G.1 above).

Item Name	Type	Len	Local Tag	Item UL	Req?	Occurs	Description
AS_07_Segmentation_DMS_PartNumber	UInt16			060e2b34.01010101.0d0e0101.07030101	Opt	0 or 1	<i>Identifier for the part number. Combined with AS_07_Segmentation_DMS_PartTotal, these metadata items represent part numbers of the form 1 of 3, 2 of 3, 3 of 3 with AS_07_Segmentation_DMS_PartNumber being the first integer.</i>
AS_07_Segmentation_DMS_PartTotal	UInt16			060e2b34.01010101.0d0e0101.07030102	Opt	0 or 1	<i>Identifier for the total number of parts in the program. Combined with AS_07_Segmentation_DMS_PartNumber, these metadata items represent part numbers of the form 1 of 3, 2 of 3, 3 of 3 with AS_07_Segmentation_DMS_PartTotal being the second integer.</i>

15 Appendix H. AS-07 Manifest XML Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<!-- edited with XMLSpy v2013 rel. 2 sp2 (http://www.altova.com) by The Library of Congress (LIBRARY OF CONGRESS) -->
<!-- AS-07-Manifest -->
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:mft="http://www.amwa.tv/as-07/1.0/manifest"
targetNamespace="http://www.amwa.tv/as-07/1.0/manifest" elementFormDefault="qualified"
attributeFormDefault="unqualified">
  <!-- ManifestType -->
  <xs:complexType name="ManifestType">
    <xs:sequence>
      <xs:element name="FileID" type="mft:UUID"/>
      <xs:element name="FileIDType" type="mft:IdType"/>
      <xs:element name="ResponsibleOrgName" type="xs:string"/>
      <xs:element name="CreationDate" type="xs:dateTime"/>
      <xs:element name="AnnotationText" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="PartList">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Part" type="mft:PartType" maxOccurs="unbounded"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##other" processContents="lax"/>
  </xs:complexType>
  <!-- PartType -->
  <xs:complexType name="PartType">
    <xs:sequence>
      <xs:element name="PartID" type="mft:IdType"/>
      <xs:element name="DataDescription" type="mft:DataDescription"/>
      <xs:element name="MimeType" type="xs:string" minOccurs="1" maxOccurs="1"/>
      <xs:element name="Size" type="xs:nonNegativeInteger"/>
      <xs:element name="Location" type="xs:anyURI" minOccurs="0" maxOccurs="1"/>
      <xs:element name="PartAnnotationText" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
      <xs:any namespace="##other" processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:anyAttribute namespace="##other" processContents="lax"/>
  </xs:complexType>
  <!-- IdType -->
  <xs:simpleType name="IdType">
    <xs:union memberTypes="mft:UUID mft:UMID mft:UL mft:otherID"/>
  </xs:simpleType>
  <!-- UUID -->
  <xs:simpleType name="UUID">
    <xs:restriction base="xs:string">
      <xs:pattern value="urn:uuid:[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}"/>
    </xs:restriction>
  </xs:simpleType>
  <!-- UMID -->
  <xs:simpleType name="UMID">
    <xs:restriction base="xs:string">
      <xs:pattern value="urn:smppte:umid:([0-9a-fA-F]{8}\.){7}[0-9a-fA-F]{8}"/>
    </xs:restriction>
  </xs:simpleType>
  <!-- UL -->
  <xs:simpleType name="UL">
    <xs:restriction base="xs:string">

```

```

    <xs:pattern value="urn:smp:ul:([0-9a-fA-F]{8}\.){3}[0-9a-fA-F]{8}"/>
  </xs:restriction>
</xs:simpleType>
<!-- Other -->
<xs:simpleType name="otherID">
  <xs:restriction base="xs:string">
    <xs:pattern value="" />
  </xs:restriction>
</xs:simpleType>
<!-- DataDescription -->
<xs:simpleType name="DataDescription">
  <xs:restriction base="xs:string">
    <xs:enumeration value="graphic/image"/>
    <xs:enumeration value="related document"/>
    <xs:enumeration value="associated material"/>
    <xs:enumeration value="supplementary metadata"/>
    <xs:enumeration value="trailer/preview"/>
    <xs:enumeration value="quality control/review data"/>
    <xs:enumeration value="other"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="Manifest" type="mft:ManifestType"/>
</xs:schema>
```

16 Appendix I. Cryptographic Structures

This appendix details the AS-07 implementation of content integrity elements tailored to maximize interoperability with the approach used in the digital cinema specification SMPTE ST 429-6:2006, and as specified in this document in section 6.7.2.6.

I.1 AS-07-Cryptographic Framework

Item Name	Type	Len	Item UL	Rec	Meaning	<i>Compare to SMPTE ST 429-6:2006 (informative)</i>
CryptographicFrameworkKey	Set Key	16	<i>See SMPTE ST 429-6:2006 table 3</i>	Req	Defines the Cryptographic Framework Set	<i>No change</i>
Length	BER Length	var	<i>See SMPTE ST 429-6:2006 table 3</i>	Req	Set length	<i>No change</i>
InstanceID	UUID	16	<i>See SMPTE ST 429-6:2006 table 3</i>	Req	Unique identifier for the framework.	<i>No change</i>
GenerationUID	UUID	16	<i>See SMPTE ST 429-6:2006 table 3</i>	Opt	Optional Generation Identifier	<i>No change</i>
ContextSR	Strong Ref	16	<i>See SMPTE ST 429-6:2006 table 3</i>	Req	Strong reference to the associate Cryptographic Context Set	<i>No change</i>

I.2 AS-07-Cryptographic Context Set

Item Name	Type	Len	Item UL	Rec	Meaning	<i>Compare to SMPTE ST 429-6:2006 (informative)</i>
CryptographicContextKey	Set Key	16	<i>See SMPTE ST 429-6:2006 table 5</i>	Req	Defines the Cryptographic Context Set	<i>No change</i>
Length	BER Length	var		Req	Set length	<i>No change</i>

AS-07: MXF Archive and Preservation Format

InstanceID	UUID	16	See SMPTE ST 429-6:2006 table 5	Req	Unique identifier for the context used by Cryptographic Framework to refer to the Context.	No change
GenerationUID	UUID	16	See SMPTE ST 429-6:2006 table 5	Opt	Optional Generation Identifier	No change
Context ID	UUID	16	See SMPTE ST 429-6:2006 table 5	Req	Unique identifier used by Encrypted Triplets to refer to the Context.	No change
SourceEssenceContainerLabel	UL	16	See SMPTE ST 429-6:2006 table 5	Req	Essence Container Label for the source essence, prior to encryption	No change
CipherAlgorithm	UL or zero	16	See SMPTE ST 429-6:2006 table 5	Req	Algorithm used for Triplet encryption, if any.	Use SMPTE ST 429-6:2006 option for Null value as default.
MICAlgorithm	UL or zero	16	See SMPTE ST 429-6:2006 table 5	Req	Algorithm used for Triplet integrity, if any.	Replace SHA-1 with CRC-32C.
CryptographicKeyID	UUID	16	See SMPTE ST 429-6:2006 table 5	Req	Unique identifier for the cryptographic key.	Use a Zero value
MICCarriage	UL	16	060e2b34. 01010101. 0d0e0101. 07040100	Opt	Informs decoder where to find MIC value	Added item for AS-07. Value = SystemItem indicates AS-07 usage; absent Value indicates use of Encrypted Triplets

17 Appendix J. AS-07 Baseband Shim: Single Items from Baseband Video

AS-07 Baseband Shim files are intended to carry single items derived from baseband video, understood to encompass both analog baseband and uncompressed digital video (as incoming source streams). AS-07 Baseband Shim files are intended to contain a single rendition of a single source item. This represents the priority use case for the Federal Agencies FADGI Working Group: the reformatting of older analog and digital videotapes and, at a few agencies, the encoding and packaging of "live" content streams. (For example, the Library of Congress will be receiving, processing, and archiving high definition digital streams from congressional venues.) In these instances, a baseband or uncompressed digital video signal is input to an MXF-file production system.

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Essence Partitions (6.2.3.3)						
Essence Partition Strategy	Defines whether the essence is a single partition or divided into multiple partitions.	essence_partition_strategy	Strong	Single Multiple	Strong	Single Multiple
Index Tables (6.2.5.2)						
Single index location	If all Index Table Segments that compose one Complete Index Table are in one Partition, value shall be TRUE. Else (multiple Partitions), value shall be False.	single_index_location	Moderate	True False	Moderate	False
Single essence location	If all Essence Containers are in one Partition, the value shall be TRUE. Else, (Essence Container Segments in multiple Partitions), value shall be FALSE.	single_essence_location	Moderate	True False	Moderate	False
Forward index direction	If all Index Table Segments that compose one Complete Index Table precede Essence Container Segments that they index, value shall be TRUE. Else (Index Table Segments follow Essence Container Segments), value shall be FALSE.	forward_index_direction	Moderate	True False	Moderate	True
CBE Index Tables	Use of Index Tables for CBE essences that omit the Index Entry Array (SMPTE ST 377-1:2011, section 11.1.9).	cbe_index_table	Moderate	Mandated, Forbidden, Encouraged, Permitted	Moderate	Permitted

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
VBE Index Tables	Use of Index Tables for VBE essences that employ partial or sparse tables (SMPTE ST 377-1:2011, section 11.3).	vbe_index_tables	Moderate	Mandated, Forbidden, Encouraged, Permitted	Moderate	Permitted
Picture Essence – JPEG 2000 Compressed (6.2.10.2.4)						
Picture family for JPEG 2000	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	Conform to ISO/IEC 15444-1:2004/Amd 3:2010; JPEG 2000 Core Coding Broadcast Profiles: Profile levels 6 and 7 (lossless) and levels 1 through 5 (lossy). Conform to ISO/IEC 15444-1:2004/Amd 1:2006; JPEG 2000 Core Coding Profiles for digital cinema applications: Profiles for 4K and 2K (lossy) Conform to ISO/IEC 15444-1:2004/Amd 8:2015; Profiles for an interoperable master format IMF	Gentle	Conform to ISO/IEC 15444-1:2004/Amd 3:2010; JPEG 2000 Core Coding Broadcast Profiles: Profile levels 6 and 7 (lossless) and levels 1 through 5 (lossy).
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor	Strong	Any of: CDCIDescriptor RGBADescriptor
Picture format (CDCI)	If Descriptor is CDCI, picture raster, aspect ratio, and frame rate	picture_format_CDCI	Moderate	If CDCI Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.	Moderate	If CDCI Descriptor, subset of SMPTE ST 352:2013: any of: 486i 4:3 or 16:9 (30 or 29.97 Hz fps) 486p 4:3 or 16:9 (60, 59.94, 30, 29.97, 24, or 23.98 Hz fps) 576i 4:3 or 16:9 (25 Hz fps) 576p 4:3 or 16:9 (50 or 25 Hz fps) 720p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) 1080i (30, 29.97, 25 Hz fps)

AS-07: MXF Archive and Preservation Format

Dimension	Description: what may be constrained	Shim parameter	AS-07 constraint	AS-07 values	Baseband shim constraint	Baseband shim values
						1080p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) Other specialized rasters may be added in future editions of AS-07.
Permitted component depth (CDCI)	if Descriptor is CDCI, <i>Component Depth</i> types that may be present in the file	permitted_comp onent_depth_CD CI	Moderate	If CDCI Descriptor: Any permitted by SMPTE ST 377-1:2011, sections F.4.2 and G.2.26.	Strong	8, 10, 12, 16
Permitted J2CLayout (CDCI)	if Descriptor is CDCI, <i>PixellLayout</i> types that may be present in the file, with J2CLayout subdescriptor	permitted_J2C_l ayout_CDCI	Moderate	If CDCI Descriptor, any permitted by SMPTE ST 422:2014 Shall not be present.	Strong	If CDCI Descriptor, subset of SMPTE ST 422:2014: any of { 'Y', 8, 'U', 8, 'V', 8, 0, 0, 0, 0, 0, 0, 0, 0 } { 'Y', 10, 'U', 10, 'V', 10, 0, 0, 0, 0, 0, 0, 0, 0 } { 'Y', 12, 'U', 12, 'V', 12, 0, 0, 0, 0, 0, 0, 0, 0 } { 'Y', 16, 'U', 16, 'V', 16, 0, 0, 0, 0, 0, 0, 0, 0 }
Picture format (RGBA)	if Descriptor is RGBA, picture raster, aspect ratio, and frame rate	picture_format_ RGBA	Moderate	If RGBA Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.	Moderate	If RGBA Descriptor, subset of SMPTE ST 352:2013: any of: 486i 4:3 or 16:9 (30 or 29.97 Hz fps) 486p 4:3 or 16:9 (60, 59.94, 30, 29.97, 24, or 23.98 Hz fps) 576i 4:3 or 16:9 (25 Hz fps) 576p 4:3 or 16:9 (50 or 25 Hz fps) 720p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) 1080i (30, 29.97, 25 Hz fps)

AS-07: MXF Archive and Preservation Format

Dimension	Description: what may be constrained	Shim parameter	AS-07 constraint	AS-07 values	Baseband shim constraint	Baseband shim values
						1080p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) Other specialized rasters may be added in future editions of AS-07.
Permitted pixel layout (RGBA)	if Descriptor is RGBA, <i>PixellLayout</i> types that may be present in the file	permitted_pixel_layout_RGBA	Moderate	If RGBA Descriptor, any permitted in SMPTE 377-1:2011.	Moderate	If RGBA Descriptor, value subset from SMPTE 377-1:2011; any of { 'R', 8, 'G', 8, 'B', 8, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 10, 'G', 10, 'B', 10, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 12, 'G', 12, 'B', 12, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 16, 'G', 16, 'B', 16, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 8, 'G', 8, 'B', 8, A, 8, 0, 0, 0, 0, 0, 0 } { 'R', 10, 'G', 10, 'B', 10, A, 10, 0, 0, 0, 0, 0, 0 } { 'R', 12, 'G', 12, 'B', 12, A, 12, 0, 0, 0, 0, 0, 0 } { 'R', 16, 'G', 16, 'B', 16, A, 16, 0, 0, 0, 0, 0, 0 }
Permitted J2C layout (RGBA)	if Descriptor is RGBA, <i>J2CLayout</i> types that may be present in the file, with J2CLayout subdescriptor	permitted_J2C_layout_RGBA	Moderate	If RGBA Descriptor, any permitted by SMPTE ST 422:2014 Shall not be present.	Strong	If RGBA Descriptor, subset from SMPTE ST 422:2014; any of { 'Y', 8, 'U', 8, 'V', 8, 0, 0, 0, 0, 0, 0, 0, 0 } { 'Y', 10, 'U', 10, 'V', 10, 0, 0, 0, 0, 0, 0, 0, 0 }

AS-07: MXF Archive and Preservation Format

Dimension	Description: what may be constrained	Shim parameter	AS-07 constraint	AS-07 values	Baseband shim constraint	Baseband shim values
						{ 'Y', 12, 'U', 12, 'V', 12, 0, 0, 0, 0, 0, 0, 0, 0 } { 'Y', 16, 'U', 16, 'V', 16, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 8, 'G', 8, 'B', 8, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 10, 'G', 10, 'B', 10, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 12, 'G', 12, 'B', 12, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 16, 'G', 16, 'B', 16, 0, 0, 0, 0, 0, 0, 0, 0 } { 'R', 8, 'G', 8, 'B', 8, A, 8, 0, 0, 0, 0, 0, 0 } { 'R', 10, 'G', 10, 'B', 10, A, 10, 0, 0, 0, 0, 0, 0 } { 'R', 12, 'G', 12, 'B', 12, A, 12, 0, 0, 0, 0, 0, 0 } { 'R', 16, 'G', 16, 'B', 16, A, 16, 0, 0, 0, 0, 0, 0 }
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	SD 360 Mbps HD 1.5 Gbps Will expand in future	Gentle	SD 360 Mbps HD 1.5 Gbps
Permitted pixel layout	<i>PixellLayout</i> and/or <i>J2CLayout</i> types that may be present in the file	permitted_pixel_layout	Moderate	Any	Strong	Any of YUV8 YUV10 YUV12 YUV16 RGB8 RGB10 RGB12 RGB16
Permitted containers	Essence container types that may be present in the file.	permitted_essence_container	Moderate	Any of MXFGCJP2K_P1 MXFGCJP2K_I1 MXFGCJP2K_I2	Strong	Any of MXFGCJP2K_P1 MXFGCJP2K_I2
Picture Essence – Uncompressed (6.2.10.3.4)						

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Picture family for uncompressed	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	Uncompressed carried in a SMPTE ST 384-compliant GC Element, using bitstream codings as specified in SMPTE ST 377-1:2009 (or later), annex G.2.25.	Gentle	Uncompressed carried in a SMPTE ST 384-compliant GC Element, using bitstream codings as specified in SMPTE ST 377-1:2009 (or later), annex G.2.25.
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor	Moderate	Any of CDCIDescriptor RGBADescriptor
Picture format (CDCI)	If Descriptor is CDCI, picture raster, aspect ratio, and frame rate	picture_format_CDCI	Moderate	If CDCI Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.	Moderate	If CDCI Descriptor, subset of SMPTE ST 352:2013: any of: 486i 4:3 or 16:9 (30 or 29.97 Hz fps) 486p 4:3 or 16:9 (60, 59.94, 30, 29.97, 24, or 23.98 Hz fps) 576i 4:3 or 16:9 (25 Hz fps) 576p 4:3 or 16:9 (50 or 25 Hz fps) 720p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) 1080i (30, 29.97, 25 Hz fps) 1080p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) Other specialized rasters may be added in future editions of AS-07.
Permitted component depth (CDCI)	if Descriptor is CDCI, <i>Component Depth</i> types that may be present in the file	permitted_component_depth_CDCI	Moderate	If CDCI Descriptor: Any permitted by SMPTE ST 377-1:2011, sections F.4.2 and G.2.26.	Strong	If CDCI Descriptor: 8, 10, 12, 16
Permitted J2C layout (CDCI)	if Descriptor is CDCI, <i>J2CLayout</i> types that may be present in the file, if the Descriptor is CDCI	permitted_J2C_layout_CDCI	Moderate	Shall not be present.	Strong	Shall not be present

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Picture format (RGBA)	If Descriptor is RGBA, picture raster, aspect ratio, and frame rate	picture_format_RGBA	Moderate	If RGBA Descriptor, any picture format permitted by ST 352:2013. Other specialized rasters may be added in future editions of AS-07.	Moderate	If RGBA Descriptor, any of: 486i 4:3 or 16:9 (30 or 29.97 Hz fps) 486p 4:3 or 16:9 (60, 59.94, 30, 29.97, 24, or 23.98 Hz fps) 576i 4:3 or 16:9 (25 Hz fps) 576p 4:3 or 16:9 (50 or 25 Hz fps) 720p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) 1080i (30, 29.97, 25 Hz fps) 1080p (60, 59.94, 50, 30, 29.97, 25, 24, or 23.98 Hz fps) Other specialized rasters may be added in future editions of AS-07.
Permitted pixel layout (RGBA)	<i>PixelLayout</i> types that may be present in the file, if the Descriptor is RGBA	permitted_pixel_layout_RGBA	Moderate	If RGBA Descriptor, any permitted by SMPTE ST 384:2005, SMPTE 377-1:2011, sections F.4.3 and G.2.36.	Moderate	If RGBA Descriptor, any permitted by SMPTE ST 384:2005, SMPTE 377-1:2011, sections F.4.3 and G.2.36.
Permitted J2C layout (RGBA)	<i>J2CLayout</i> types that may be present in the file, if the Descriptor is RGBA	permitted_J2C_layout_RGBA	Moderate	Shall not be present.	Strong	Shall not be present
Picture bitrate	Maximum bits per second in real time	picture_bitrate	Gentle	SD 360 Mbps HD 1.5 Gbps Will expand in future	Gentle	SD 360 Mbps HD 1.5 Gbps
Permitted pixel layout	<i>PixelLayout</i> types that may be present in the file	permitted_pixel_layout	Moderate	Any	Strong	Any of YUV8 YUV10 YUV12 YUV16 RGB8 RGB10 RGB12 RGB16

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Permitted ITU-R format standards	ITU-R formats that may be present in the file, or an equivalent format if fully specified in a shim	permitted_ITU-R_formats	Gentle	BT.601 (SD) BT.709 (HD) BT.2020 (UHDTV) Specified by a shim Will expand in future	Gentle	BT.601 (SD) BT.709 (HD)
Permitted containers	<i>EssenceContainerLabel</i> types that may be present in the file.	permitted_essence_container	Moderate	Any frame-wrapped container permitted by SMPTE ST 384:2005.	Moderate	Any frame-wrapped container permitted by SMPTE ST 384:2005.
Picture Essence – Retain Source Encoding as Acquired (6.2.10.4.5)						
Picture family for retain born digital as acquired	Picture signal schemes (compression or sampling or other)	picture_family	Gentle	MPEG (ST 381-1 and 381-2) DV-DIF (ST 383) SDTI-CP (ST 385) D-10 (ST 386) D-11 (ST 387) JPEG 2000 (ST 422) VC-3 (ST 2019) VC-1 (ST 2037) AVC (ST 381-3) Forbidden	Strong	Forbidden
Picture format	Picture raster and aspect ratio	picture_format	Moderate	480p 4:3 486i 4:3 486i/p 16:9 576i/p 4:3, 576i/p 16:9 720p 16:9 1080i/p Forbidden	Strong	Forbidden
Picture bitrate	Bits per second in real time	picture_bitrate	Gentle	Up to 1.5 Gbps Forbidden	Strong	Forbidden
Permitted pixel layout	<i>PixelLayout</i> types that may be present in the file	pixel_layout	Moderate	Any permitted by the following MXF mapping standards: SMPTE ST 381-1:2005 SMPTE ST 381-2:2011 SMPTE ST 383:2008 SMPTE ST 385:2004 SMPTE ST 386:2004 SMPTE ST 387:2004 SMPTE ST 422:2014 SMPTE ST 2019-1:2009 SMPTE ST 2037:2009 SMPTE ST 381-3 (forthcoming) Forbidden	Strong	Forbidden
Permitted descriptors	<i>Essence Descriptors</i> that may be present in the file	permitted_essence_descriptors	Moderate	Any of CDCIDescriptor RGBADescriptor Forbidden	Strong	Forbidden

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Permitted containers	Essence container types that may be present in the file.	permitted_essence_container	Moderate	Any frame-wrapped container permitted by the following MXF mapping standards: SMPTE ST 381-1:2005 SMPTE ST 381-2:2011 SMPTE ST 383:2008 SMPTE ST 385:2004 SMPTE ST 386:2004 SMPTE ST 387:2004 SMPTE ST 422:2014 SMPTE ST 2019-1:2009 SMPTE ST 2037:2009 SMPTE ST 381-3 (forthcoming) Forbidden	Strong	Forbidden

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Audio Essences (6.2.11.6)						
Sound family	Sound signal schemes (compression or sampling or other)	sound_family	Moderate	PCM 192 kHz 24 bit PCM 96 kHz 24 bit PCM 88.2 kHz 24 bit PCM 48 kHz 24 bit PCM 48 kHz 16 bit PCM 44.1 kHz 16 bit PCM 32 kHz 12 bit Additional pull-down and pull-up PCM sampling frequencies for fractional frame rates: 192192, 191808, 96096, 95904, 88112, 88288, 48048, 47952, 44144, 44056, 32032, and 31968 Hz. AC-3 Other MPEG schemes, e.g., layer 2 or layer 3 (MP3), or AAC (ST 338)	Moderate	PCM 96 kHz 24 bit PCM 48 kHz 24 bit PCM 48 kHz 16 bit
Sound language tagging	Tagging of soundtrack languages that may be present, to be identified in AS_07_Core_DMS using codes from RFC 5646 (2009), e.g., en-US, fr-CA. Tagging mandated when languages are required.	sound_language_tagging	Moderate	Mandated, Forbidden, Encouraged, Permitted	Moderate	Encouraged
Sound language repertoire	Soundtrack languages required by a shim	sound_language_repertoire	Moderate	Identifiers selected from RFC 5646 Null	Moderate	Identifiers selected from RFC 5646 Null
Captions, Subtitles, and Timed Text (6.2.12.9)						
Caption	Carriage of CEA-608 or -708 captions (from source material or if newly produced)	caption_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted	Strong	Mandated
Caption signal scheme	Captions signal schemes	caption_scheme	Strong	CEA-608 in SMPTE ST 436:2006 CEA-708 in SMPTE ST 436:2006	Strong	CEA-608 in SMPTE ST 436:2006 CEA-708 in SMPTE ST 436:2006
EBU Subtitles	Carriage of EBU Tech 3264 STL (from source material or if newly produced)	ebu_stl_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted	Strong	Mandated

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
SMPTE or EBU Timed Text	Carriage of SMPTE or EBU Timed Text (when converted from CEA-608, CEA-708, or EBU STL, or if newly produced)	tt_carriage	Strong	Mandated, Forbidden, Encouraged, Permitted	Strong	Mandated
Timed Text signal scheme	Timed text signal scheme	tt_scheme	Strong	SMPTE ST 2075:2013 EBU Tech 3350	Strong	SMPTE ST 2075:2013 EBU Tech 3350
VBI and ANC (6.2.13.3)						
VBI data essence	A list of supported data essence types permitted in a given shim, including specific parameters such as VBI lines supported.	VBI_data_essence	Strong	[List from SMPTE ST 436] [Any, all]	Strong	[List from SMPTE ST 436] [Any, all]
ANC data essence	A list of supported data essence types permitted in a given shim, including specific parameters such as ANC packet types supported.	ANC_data_essence	Strong	[List from SMPTE ST 291] [Any, all]	Strong	[List from SMPTE ST 436] [Any, all]
AFD and Pan-Scan (6.2.14.3)						
AFD codes	Selection of one or more of the 16 codes for AFD (SMPTE ST 2016-1:2009, Table 1)	AFD_codes	Gentle	Any	Gentle	Any
Pan-Scan data	Pan-Scan carriage (SMPTE ST 2016-2:2007)	PanScan_data	Moderate	Mandated, Forbidden, Encouraged, Permitted	Moderate	Permitted
Operational Patterns (6.3.6)						
Permitted Operational Patterns	MXF-specific Operational Pattern	operational_pattern_types	Strong	OP1a internal OP1b internal OP3c external	Strong	OP1a internal OP1b internal
Timecode (6.4.6)						
Master Timecode mode	Master Timecode mode requirement	master_timecode_mode	Strong	Drop frame Non-drop-frame Mode not declared	Strong	Drop frame Non-drop-frame Mode not declared
Master Timecode frame rate	Master Timecode frame rate requirement	master_timecode_framerate	Gentle	Integer or rational numerical value representing the number of frames per second. No requirement	Gentle	Integer or rational numerical value representing the number of frames per second.

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Master Timecode start type	Type of clock start for Master Timecode	master_timecode_starttype	Gentle	Fixed value Start value derived from Historical Source Timecode Any value	Gentle	Any value
Fixed value Master Timecode start time	Prescribed start time for fixed-value Master Timecode	master_timecode_fixed_startvalue	Gentle	Any timecode value expressed as HH:MM:SS:FF No requirement	Gentle	No requirement
Historical Source Timecode in LLSP, requirement type	Historical Source Timecode track instances in the LLSP	historical_source_timecode_LLSP	Gentle	Mandated, Forbidden, Encouraged, Permitted	Gentle	Encouraged
Header metadata (6.5.2)						
Program identification	Required identifiers	program_identification	Gentle	One of: UUID UMID UL Other	Gentle	One of: UUID UMID UL Other
Timecode	Program timecode supplied	program_timecode	Strong	Mandatory	Strong	Mandatory
Master Timecode	Master Timecode track in the Material Package, synthetic and continuous, labeled as Track 1.	master_timecode_track	Strong	Mandated	Strong	Mandated
Historical Source Timecode	One or more Historical Source Timecode tracks, labeled as a sequence of numbers beginning with 2.	historical_source_timecode_track	Strong	Mandated*	Strong	Mandated*
Intimate metadata	Metadata that is intimately associated with the essences and which must be carried with the file including information about the ingest of the source stream	intimate_metadata	Moderate	All of: Program Ident Track Ident Language Code Ingest Provenance Other per shim	Moderate	All of: Program Ident Track Ident Language Code Ingest Provenance Other per shim
* Mandated when Historical Source Timecode is carried in Essence Container System Items or Data Items.						
Top-Level Source Packages (6.5.3.3)						
Top-level source package	Quantity of top-level source packages	tlsp_quantity	Strong	Single Multiple	Strong	Single Multiple
Descriptive Metadata Schemes (6.6.3)						

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
AS_07_GSP_BD_DMS non-essence binary data	Requirement to carry AS_07_GSP_BD_DMS for non-essence binary data in Generic Stream Partitions	AS_07_GSP_BD_DMS	Strong	Permitted*	Strong	Permitted*
AS_07_GSP_TD_DMS non-essence text-based data	Requirement to carry AS_07_GSP_TD_DMS for non-essence text-based data in Generic Stream Partitions	AS_07_GSP_TD_DMS	Strong	Permitted**	Strong	Permitted**
AS_07_Segmentation_DMS segmentation data	Requirement to carry AS_07_Segmentation_DMS for segmented essences	AS_07_Segmentation_DMS	Strong	Permitted***	Strong	Permitted***
Additional Descriptive Schemes	Carriage of Additional Descriptive Schemes	additional_DMS	Gentle	Mandated, Forbidden, Encouraged, Permitted	Gentle	Permitted
* Mandated when non-essence binary data is carried in a Generic Stream Partition, otherwise permitted. ** Mandated when non-essence text-based data is carried in a Generic Stream Partition, otherwise permitted. *** Mandated when segmented essences are carried in an AS-07 file, otherwise permitted.						
Manifest (6.7.1.7)						
Manifest	Manifest required	manifest	Strong	Mandated, Forbidden, Encouraged, Permitted	Strong	Mandated
Content Integrity (6.7.2.9)						
Content integrity	Content integrity data required	content_integrity	Strong	Mandated, Forbidden, Encouraged, Permitted	Strong	Mandated
MIC algorithm	Type of integrity algorithm supported by decoders	mic_algorithm_decoder	Strong	CRC-32C CRC-32 MD5 SHA-1 SHA-256 SHA-512	Strong	CRC-32C
MIC carriage	MIC carriage location in file	mic_carriage	Strong	SystemItem Encrypted Triplet Variable Length Pack	Strong	System Item
File names (6.7.3.2)						
File names	File name restrictions	filenames	Gentle	No constraint [Filename pattern as described in shim specification]	Gentle	No constraint
Program Segmentation (6.7.5.4)						

AS-07: MXF Archive and Preservation Format

<i>Dimension</i>	<i>Description: what may be constrained</i>	<i>Shim parameter</i>	<i>AS-07 constraint</i>	<i>AS-07 values</i>	<i>Baseband shim constraint</i>	<i>Baseband shim values</i>
Program segmentation requirement	Segmentation track requirement	program_segmentation	Gentle	Mandated, Forbidden, Encouraged, Permitted	Gentle	Permitted
Program segmentation type	Shim limit as to the type of "parted-ness"	program_segmentation_type	Gentle	All types Soft-parted Hard-parted	Gentle	All types